This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor,

GENERAL NOTES:

KEY NOTES:

penetrations, and flashings.

A. Window glazing is positive for for all windows.

1 Metallic silver roofing bull on exterior roof is positive. This includes exterior roofing, parapet wall, roof

ABATEMENT LEGEND

WINDOW GLAZING

FLOOR PLAN LEVEL 1 EXISTING


DPAWN RV

CHECKED BY:

PROJECT NUMBER

236002-02

DRAWING N

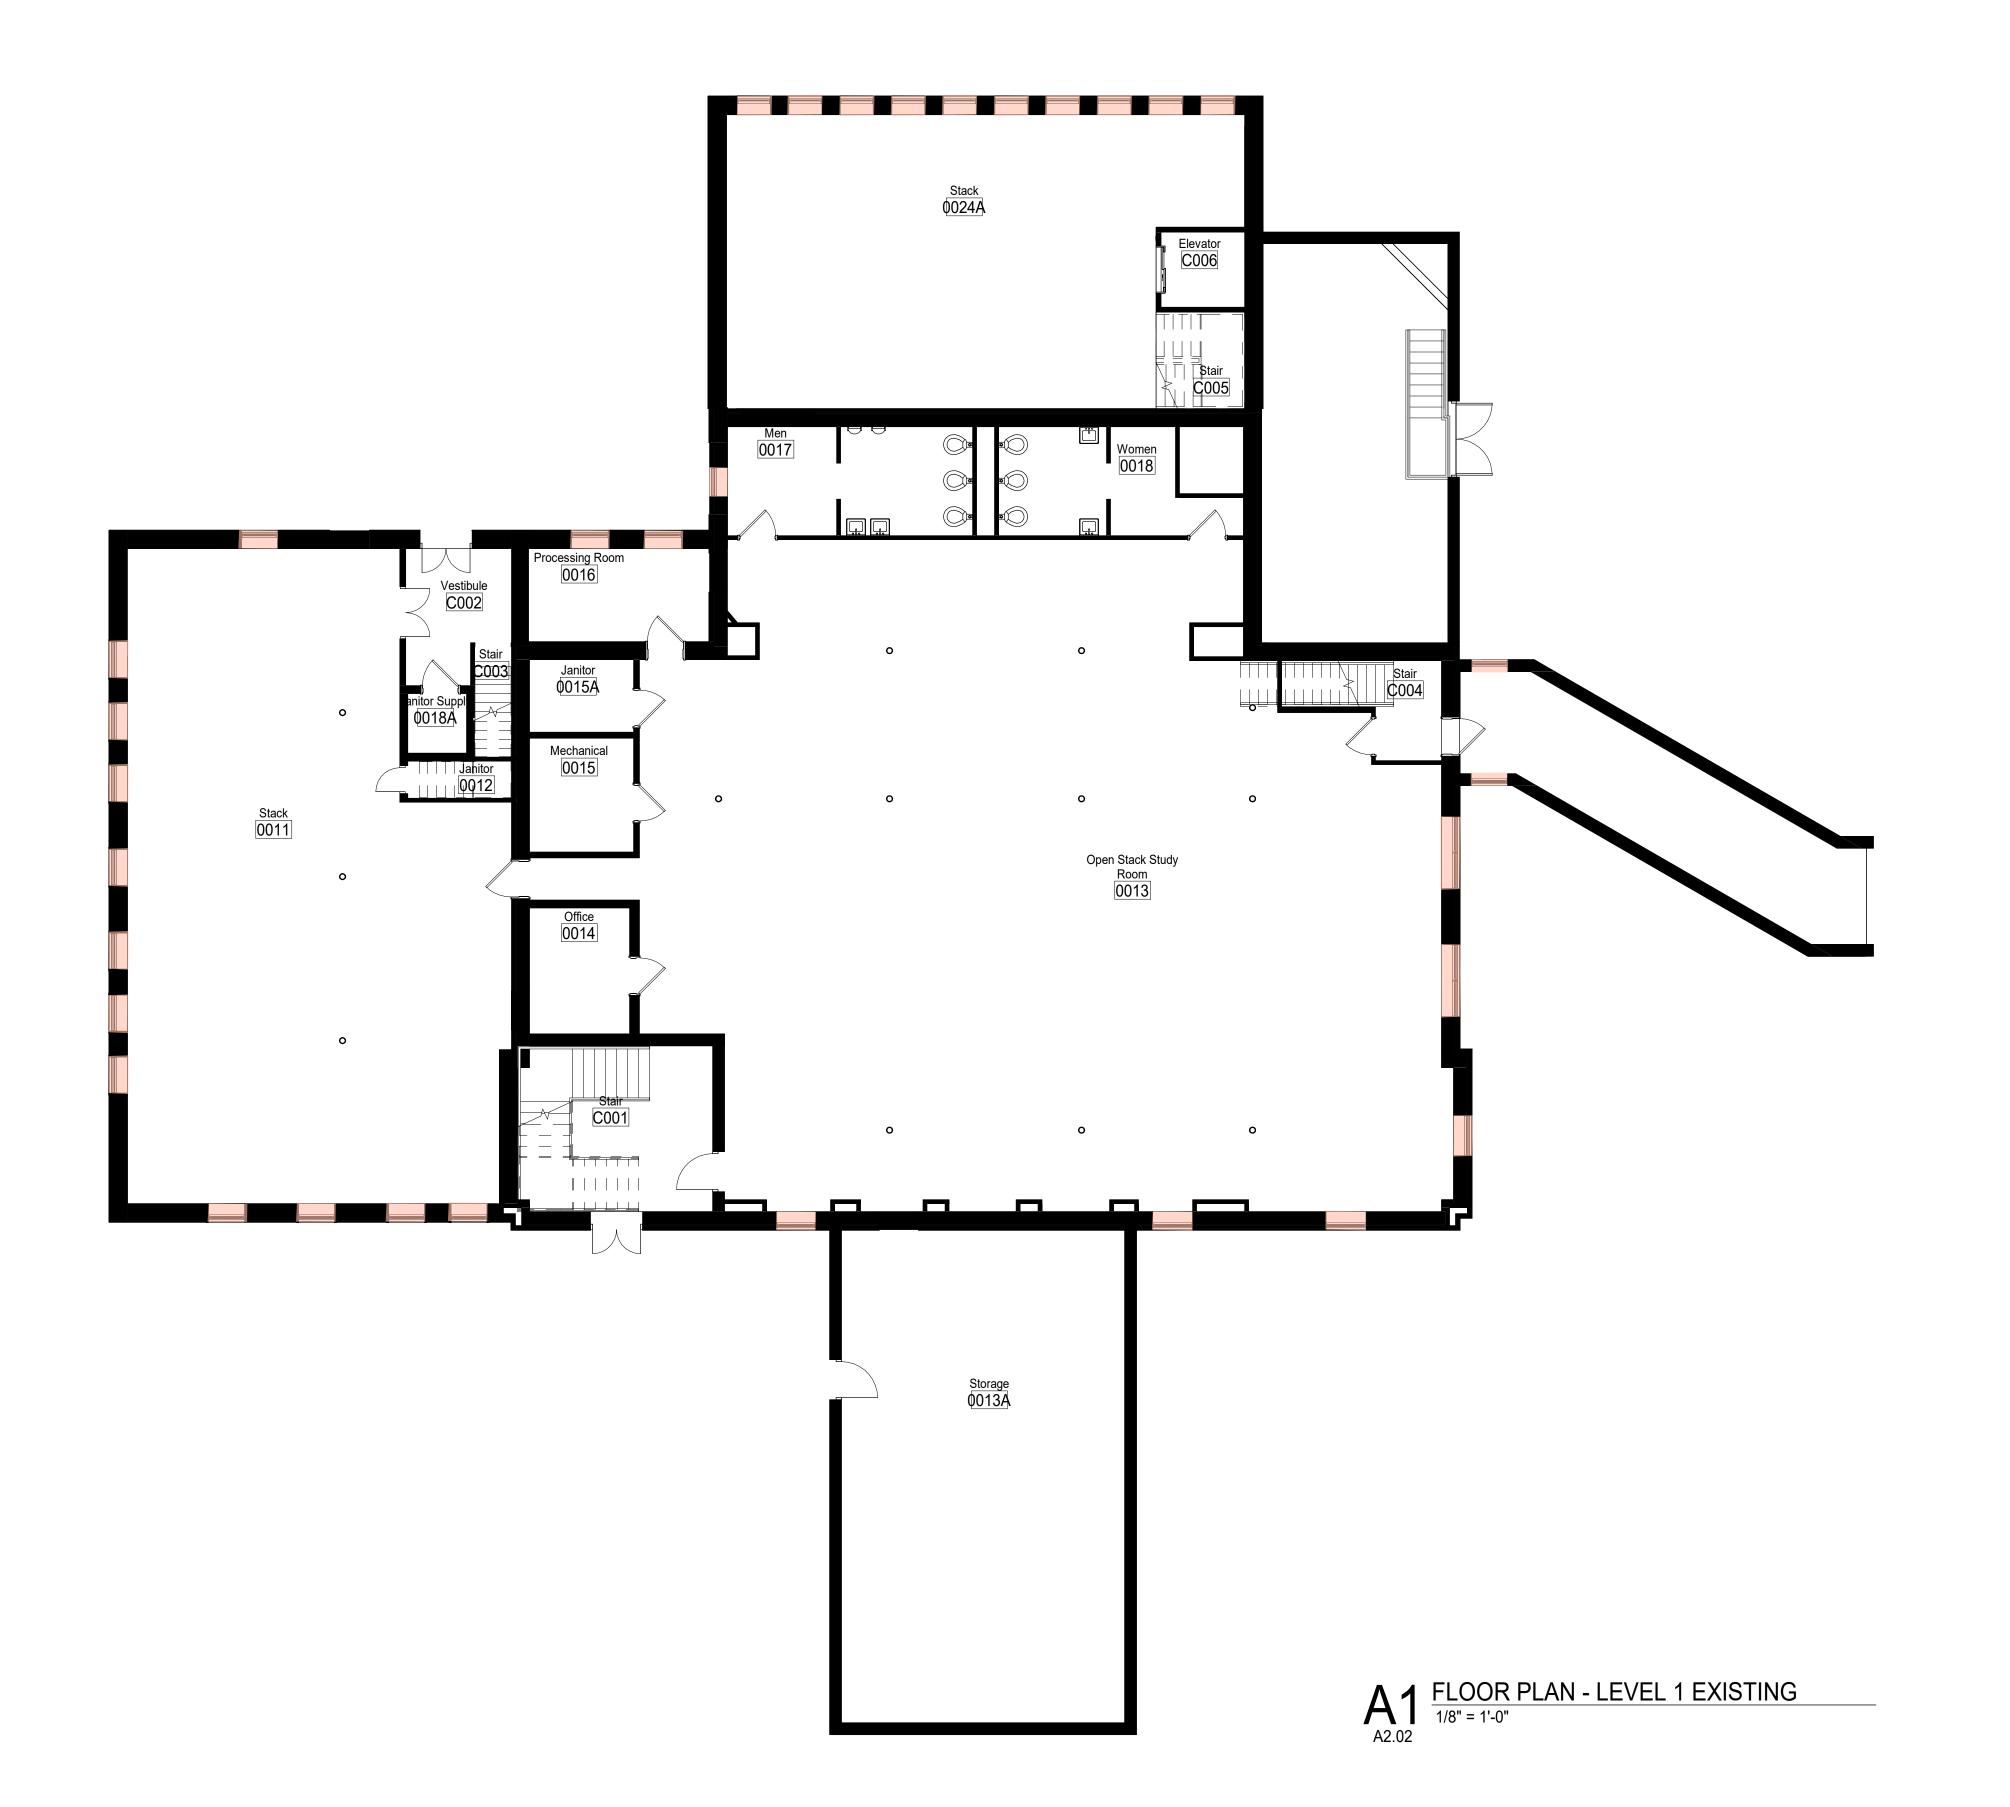

GENERAL NOTES:

A. Window glazing is positive for for all windows.

KEY NOTES:

1 Metallic silver roofing bull on exterior roof is positive. This includes exterior roofing, parapet wall, roof penetrations, and flashings.

ABATEMENT LEGEND



WINDOW GLAZING

LEVEL 2 EXISTING

FLOOR PLAN -

PROJECT STATUS

SSUED SET:

ISSUE DATE:

REVISIONS

No. Description

BID SET

30 JAN 24

DRAWN BY: SWA
CHECKED BY: RDW

PROJECT NUMBER 236002-02

ACM.02

A2.02 FLOOR PLAN - LEVEL 2 EXISTING
1/8" = 1'-0"

В

00 McLure Library - Arch_rpittsFL2L7.rvt

3/2023 4:13:13 PM

GENERAL NOTES:

KEY NOTES:

A. Window glazing is positive for for all windows.

1 Metallic silver roofing bull on exterior roof is positive. This includes exterior roofing, parapet wall, roof penetrations, and flashings.


WINDOW GLAZING

ABATEMENT LEGEND

FLOOR PLAN -LEVEL 3 EXISTING

CHECKED BY:

PROJECT NUMBER 236002-02

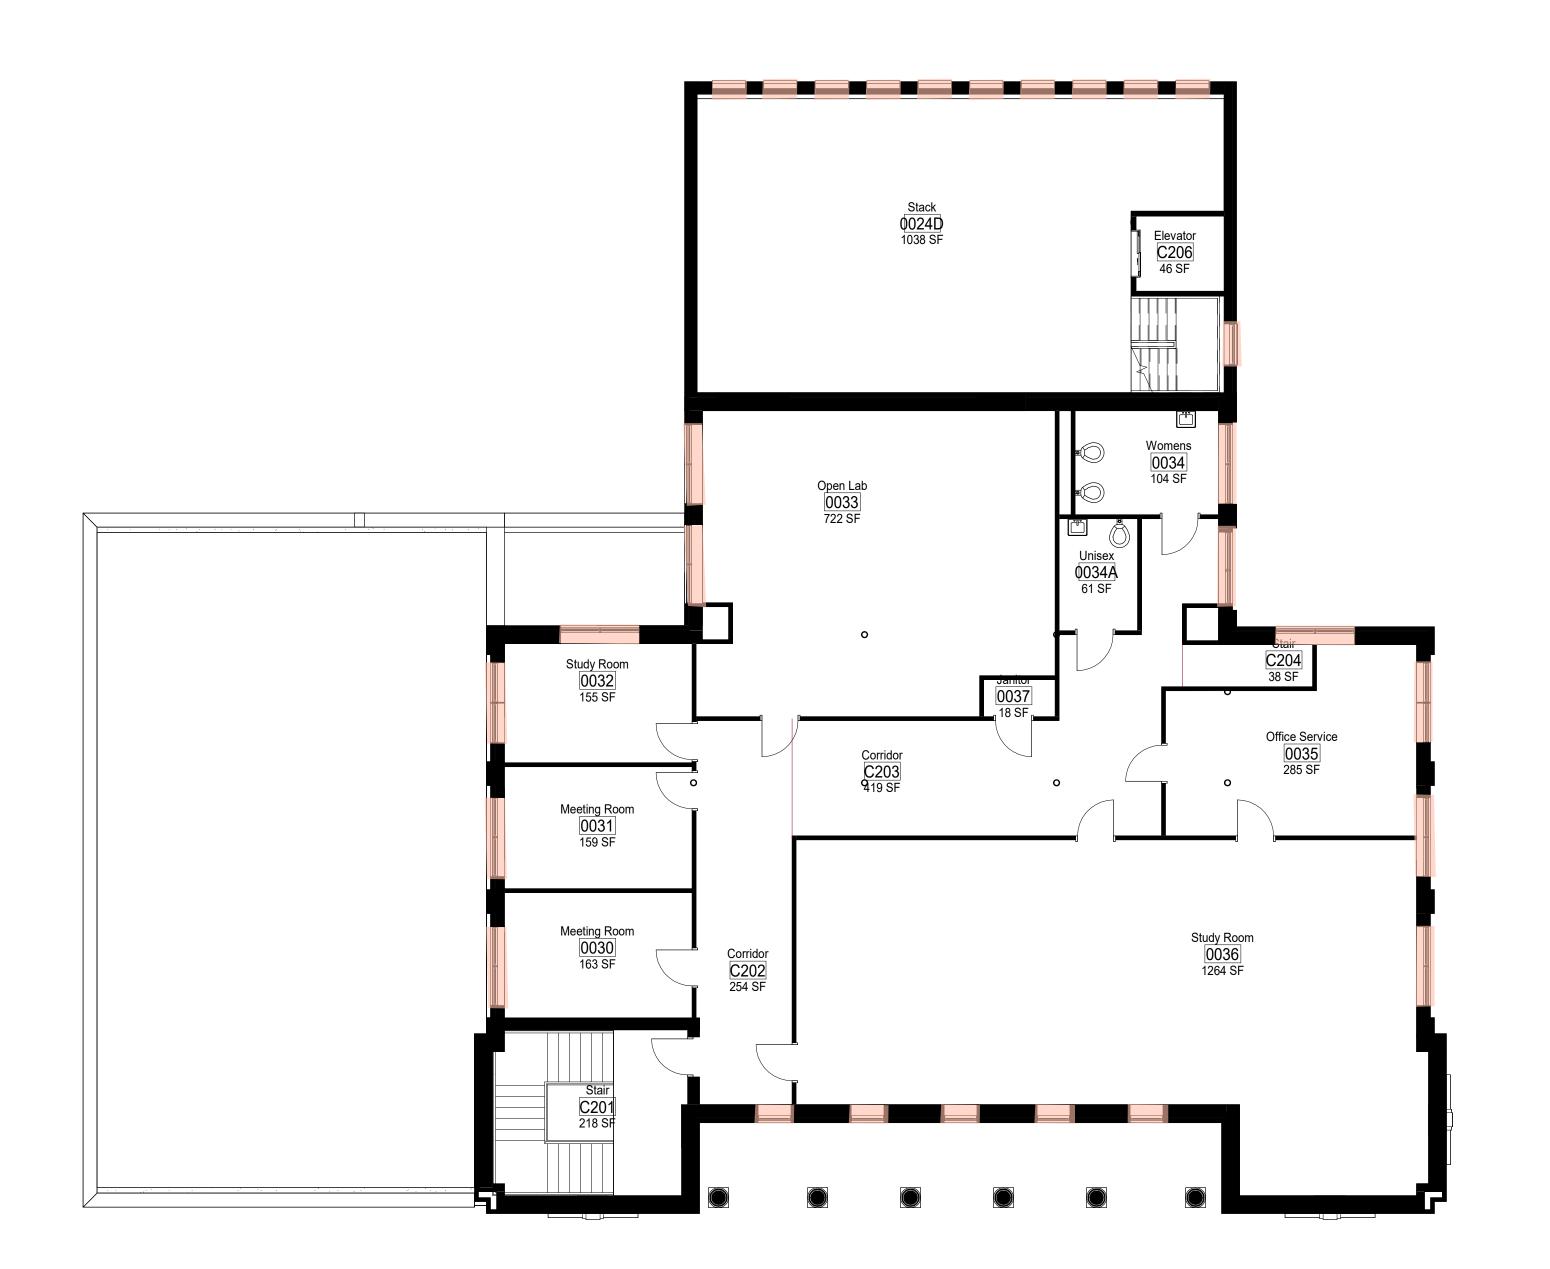

A1 FLOOR PLAN - LEVEL 3 EXISTING
1/8" = 1'-0"

GENERAL NOTES:

KEY NOTES:

penetrations, and flashings.

A. Window glazing is positive for for all windows.

1 Metallic silver roofing bull on exterior roof is positive. This includes exterior roofing, parapet wall, roof

2. IF ANY ITEM OF WORK CANNOT BE LOCATED, DO NOT PROCEED WITH THE WORK BEFORE CLARIFYING WITH ARCHITECT.

BAKERS ROW, Suite 100 60 14th Street South

Birmingham, AL 35233 205.251.0125 www.kpsgroup.com This drawing is an Instrument of Service for this Project and is the sole and exclusive property of

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract Documents.


the Architect. Any use without the knowledge and written consent of the Architect is prohibited.




DRAWING TITLE ROOF PLAN EXISTING


CHECKED BY:


PROJECT NUMBER 236002-02

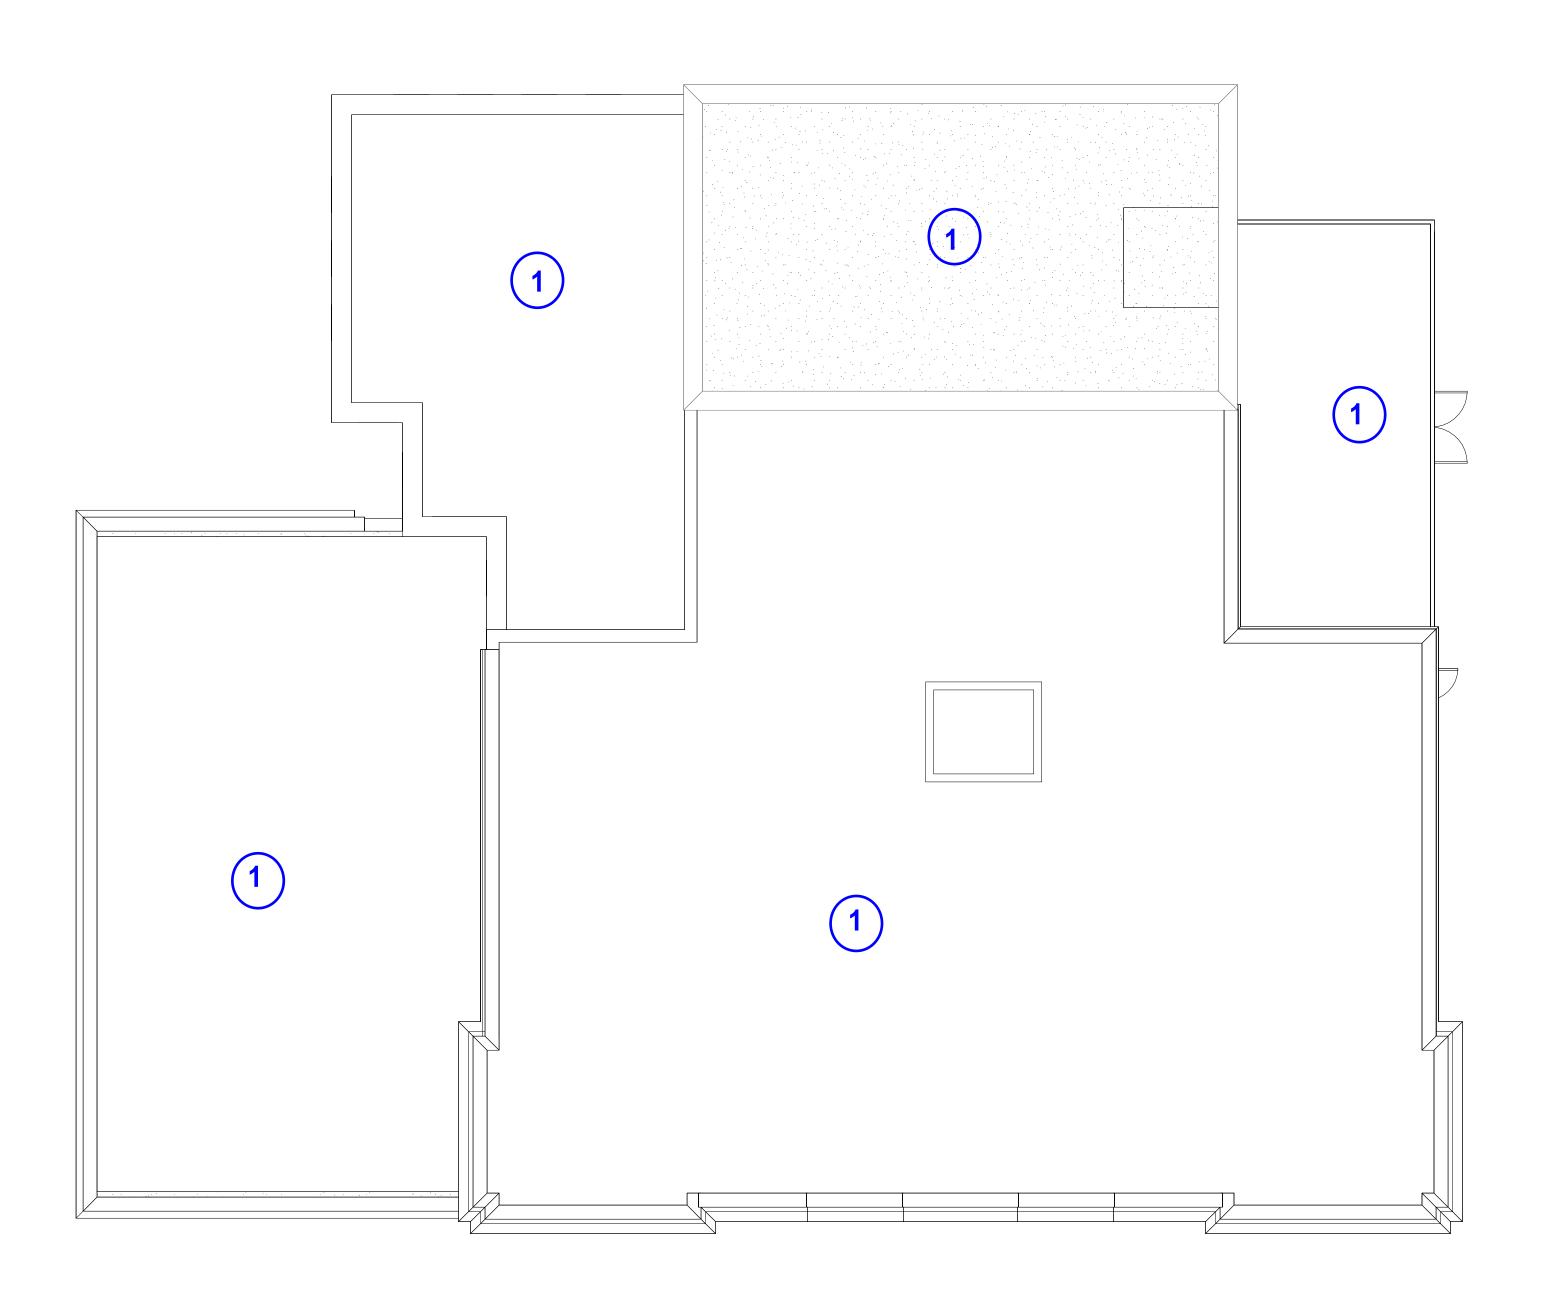

ROOF PLAN - EXISTING 1/8" = 1'-0" A2.02

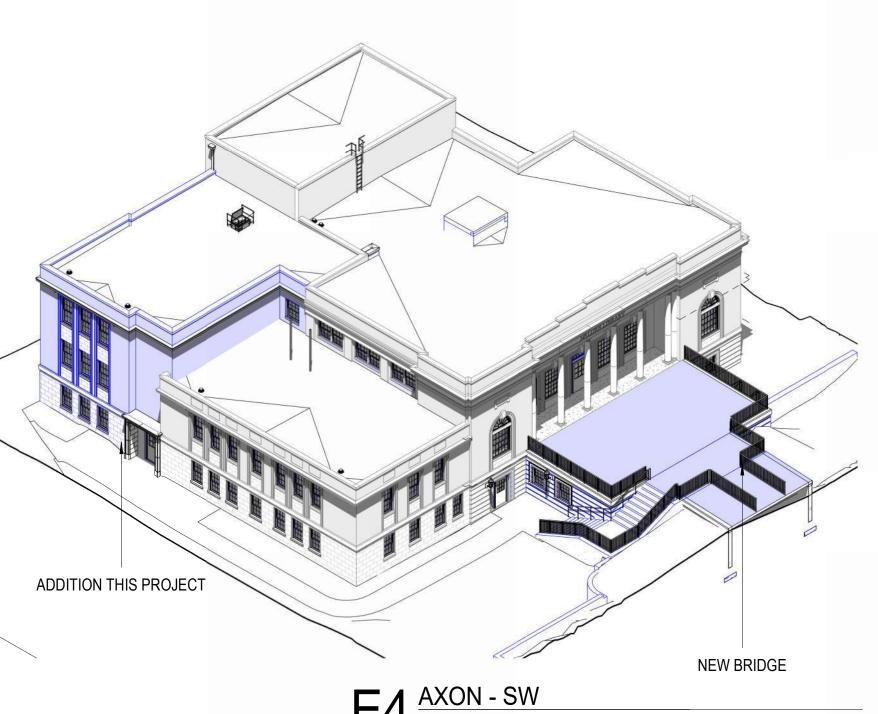

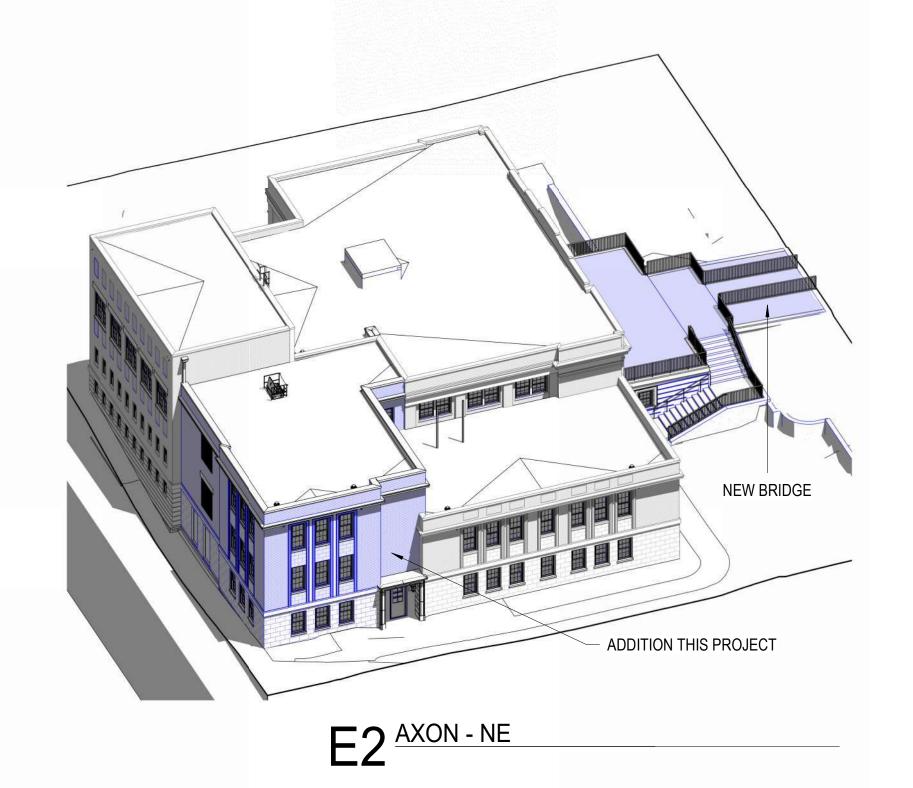

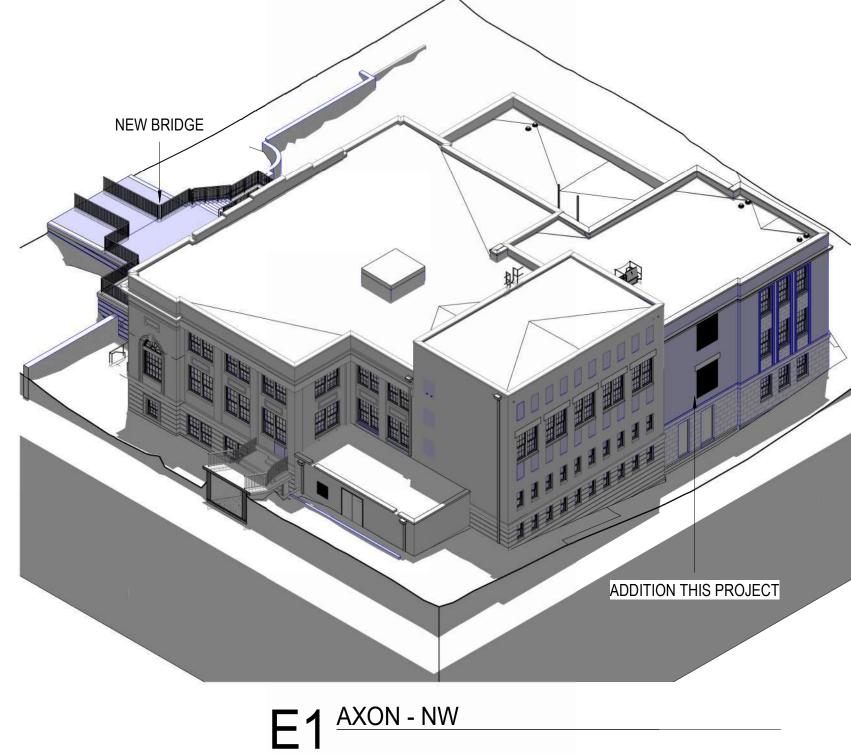



VIEW FROM NORTH





VIEW FROM SOUTH WEST



VIEW FROM WEST

60 14th Street South Birmingham, AL 35233 205.251.0125

www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract Documents.

EXTERIOR VIEWS PROJECT NUMBER 236002-02 A0.10

036 COORDINATE DEMOLITION OF SELECTED AREAS OF MASONRY WALL WITH FINISHED OPENING SIZES. PROVIDE TEMPORARY SUPPORT AND SHORING AS NEEDED. RE: STRUCTURAL AND

 $A1 \frac{\text{DEMOLITION PLAN - LEVEL 1}}{1/8" = 1'-0"}$

ARCHITECTURAL DRAWINGS. 039 DEMOLISH BRIDGE IN ITS ENTIRETY. KEEP EXISTING SANITARY SEWER APPROX 6' BELOW GRADE

046 | REMOVE PANEL AND WIRING; RE: ELECTRICAL DWGS

048 DOOR TO REMAIN

053 DEMOLISH EXISTING PIPING

(053) 17' - 7" +/-- OUTLINE OF FINISHED PIT OPENING ⟨031⟩— - NOT IN SCOPE **(039**)

DEMOLITION GENERAL NOTES

- . DO NOT SCALE DRAWINGS. DIMENSIONS ARE NOT ADJUSTABLE WITHOUT ARCHITECT'S APPROVAL, UNLESS NOTED OTHERWISE/REFER TO ARCHITECTURAL DRAFTING NOTES AN SHEET A0.01 FOR ADDITIONAL CLARIFICATIONS.
- . IF AN ITEM OF WORK CANNOT BE LOCATED, CLARIFY WITH ARCHITECT BEFORE PROCEEDING.
- REFER TO ACM-SERIES DRAWINGS FOR ACM ABATEMENT.
- . REMOVE INTERIOR PARTITIONS PER PLAN.
- REMOVE INTERIOR DOORS AND FRAMES PER PLAN.
- 6. DEMOLISH FLOORING, INCLUDING SUBFLOOR, TILE, CARPET, AND RAISED FLOOR TO CONCRETE FLOOR SLAB, TYPICAL, UNLESS NOTED OTHERWISE.
- . REMOVE PLUMBING FIXTURES PER PLAN. REMOVE PIPING AND ADDITIONAL FIRE PROTECTION AND PLUMBING PER PLUMBING DEMOLITION PLANS.
- . REMOVE HVAC DEVICES, DUCTS, AND PIPING PER MECHANICAL DEMOLITION
- 9. DEMOLISH EXTERIOR DOORS AND WINDOWS, TYPICAL, UNLESS NOTED OTHERWISE. LEAVE EXISTING FRAME IN PLACE TO ANCHOR NEW WORK. RE:
- 10. REMOVE EXISTING CASEWORK, MILLWORK, SHELVING.
- 11. REMOVE PLASTER FINISH FROM INSIDE FACE OF MASONRY WALLS DOWN TO BRICK, TYPICAL. RE: ACM DRAWINGS FOR REQUIRED ABATEMENT.

DEMOLITION PLAN LEGEND

WINDOW DETAILS SHEETS A7.1X SERIES.

INDICATES EXISTING CONSTRUCTION TO BE DEMOLISHED TO LIMITS SHOWN ON DRAWINGS. PATCH, REPAIR, SMOOTH AND CLEAN ADJACENT FLOORS, WALLS AND CEILINGS AS REQUIRED TO PROVIDE SMOOTH SURFACE FOR NEW FINISHES

FINISHED. SAVE ALL ITEMS FOR RE-USE UNLESS

OTHERWISE NOTED. RE: STRUCTURAL

WALLS TO REMAIN

EXISTING DOOR, FRAME TO REMAIN. UPGRADE DOOR HARDWARE. EXISTING DOOR, FRAME AND HARDWARE IS TO BE REMOVED; WALLS TO BE CLEANED, REPAIRED AND RE-

DEMOLITION GENERAL NOTES (CONT'D)

- 15. THE WORK OF THIS PROJECT INCLUDES ALTERATIONS OF THE EXISTING BUILDING TO ACHIEVE THE ARRANGEMENT INDICATED ON THE DRAWINGS, THE CONTRACTOR SHALL VISIT THE JOB SITE TO DETERMINE THE EXTENT OF DEMOLITION WORK REQUIRED BY THE CONSTRUCTION ACTIVITIES. THE ARCHITECTURAL DRAWINGS FOR THESE AREAS SHOW THE CHANGES TO BE MADE. THE CONTRACTOR SHALL REVISE, REARRANGE, REROUTE OR REMOVE EXISTING WIRING AND HVAC DISTRIBUTION AS REQUIRED TO ACCOMMODATE THE CHANGES AND ADDITIONS SHOWN AND TO PROVIDE CONTINUING ELECTRICAL AND HVAC SERVICES FOR THOSE EXISTING PORTIONS OF THE PROJECT WHICH ARE TO REMAIN IN OPERATION. INTENT OF THE DRAWING IS TO SHOW EXISTING BUILDING CONDITIONS WITH INFORMATION DEVELOPED FROM AVAILABLE DOCUMENTS. CONTRACTOR SHALL MAKE A DETAILED SURVEY OF EXISTING CONDITIONS PERTAINING TO THE WORK BEFORE COMMENCING DEMOLITION. THE CONTRACTOR SHALL REPORT DISCREPANCIES BETWEEN DRAWINGS AND ACTUAL FIELD CONDITIONS TO THE ARCHITECT.
- 16. DEMOLITION NOT DESCRIBED HERE BUT NECESSARY FOR THE COMPLETION OF THE WORK SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. THE DEMOLITION DRAWINGS ARE ISSUED FOR INFORMATION ONLY AND SHOW THE GENERAL EXTENT OF THE DEMOLITION REQUIRED. THESE DRAWINGS DO NOT NECESSARILY SHOW EVERYTHING TO BE REMOVED IN ORDER TO PREPARE THE EXISTING BUILDING ELEMENTS FOR REMODELING OR NEW CONSTRUCTION. THE ARCHITECTURAL DRAWINGS SHOW THE EXISTING PARTITIONS WITH DOORS AND OTHER ITEMS TO REMAIN
- 17. FURNISH ALL LABOR AND MATERIAL REQUIRED TO COMPLETE DEMOLITION AND REMOVAL OF ALL ITEMS AS INDICATED IN ARCHITECT'S DRAWINGS OR AS OTHERWISE DIRECTED BY ARCHITECT.
- 18. FURNISH BUILDING MANAGEMENT AND ARCHITECT WITH A COMPLETE INVENTORY LIST OF ALL ITEMS THAT CAN BE REUSED AND/OR STORED IN BUILDING STOCK.
- 19. THE GENERAL CONTRACTOR SHALL EXECUTE ALL WORK WITH THE REGULATIONS OF THE BUILDING FOR DEMOLITION AND REMOVAL OF DEBRIS, INCLUDING OVERTIME WORK REQUIRED.
- 20. PROTECT THE PROPERTY OF THE BUILDING OWNER INCLUDING BUT NOT LIMITED TO, WINDOWS, FLOOR AND CEILING TILE, PUBLIC TOILETS, ELEVATORS, DOORS, BUCKS, ELECTRICAL AND AIR CONDITIONING EQUIPMENT, CONVECTOR ENCLOSURES, ETC. THE CONTRACTOR SHALL AT NO TIME DO ANY WORK OR PLACE ANY CONSTRUCTION THAT MAY AFFECT THE OPERATIONS OF THE OTHER TENANTS, INCLUDING ANY INTERRUPTIONS IN THE SUPPLY OF POWER OR OTHER UTILITIES WITHOUT FIRST NOTIFYING THE BUILDING OWNER AND OBTAINING PERMISSION TO PROCEED.
- 21. PROVIDE VISQUEEN SEAL FROM FLOOR TO CEILING AT ALL INTERFACES TO PROTECT ADJACENT BUILDING PROPERTY WHILE DEMOLITION AND CONSTRUCTION ARE IN PROGRESS. THIS SEAL IS TO BE KEPT CLOSED AT ALL
- 22. IN AREAS WHERE THERE ARE NO ALTERATIONS INDICATED THE EXISTING FACILITIES SHALL BE RETAINED IN SERVICE. IN CASE OF DOUBT ASSUME THAT THE EXISTING ELECTRICAL WIRING IS TO REMAIN IN OPERATION THROUGHOUT THE CONSTRUCTION PERIOD AND THEREAFTER.
- 23. WHERE CONSTRUCTION TO BE REMOVED INTERSECTS CONSTRUCTION TO REMAIN, WORK SHALL INCLUDE ALL ATTACHMENT DEVICES (SHOT PINS, ANCHORS, LAG BOLTS, NAILS, NAILERS, SHIMS, (ETC)
- 24. IN AREAS WHERE DEMOLITION (REMOVAL OF TILE, CARPETING, PARTITIONS, (ETC) CAUSES AND UNEVENNESS IN SLAB, PATCH TO LEVEL THE SLAB TO RECEIVE NEW FINISHED FLOORING, TYPICAL, UNLESS NOTED OTHERWISE.
- 25. REMOVE DEMOLISHED WORK FROM THE PREMISES EXCEPT ITEMS TO BE REUSED OR RETURNED TO TENANT OR AS OTHERWISE NOTED.
- 26. UPON THE REMOVAL OF THE EXISTING CEILING, THE EXISTING MECHANICAL SYSTEM WILL BE EVALUATED BY THE ENGINEER FOR POSSIBILITY FOR RE-USE, IF THE EXISTING MECHANICAL SYSTEMS ARE TO BE REUSED, EXISTING MAIN DUCT, VAV BOXES. PNEUMATIC CONTROL TUBING ETC SHALL REMAIN AND SHALL BE PROTECTED TO AVOID DAMAGE TO EXISTING HVAC EQUIPMENT DURING DEMOLITION
- 27. CAP AND FLUSH OFF BEHIND FINISH SURFACES ALL PROJECTING PLUMBING, FLOOR ELECTRICAL/TELEPHONE OUTLETS, AND ALL OTHER PROJECTING ITEMS WHICH ARE BEING ABANDONED.
- 28. THE GENERAL CONTRACTOR SHALL REMOVE FROM PREMISES CONDUITS LEFT AFTER WALL DEMOLITION, INCLUDING SWITCH BOXES, PLATES, BRIDGES OR ANY OTHER TELEPHONE OR ELECTRICAL WIRING AND EQUIPMENT.
- 29. REMOVED MATERIAL OTHER THAN ITEMS TO BE SALVAGED OR REUSED SHALL BECOME CONTRACTORS' PROPERTY UNLESS OTHERWISE NOTIFIED AND SHALL BE REMOVED FROM OWNERS PROPERTY. CLEAN UP AND DISPOSE OF DEBRIS PROMPTLY AND CONTINUOUSLY AS WORK PROGRESSES. SECURE AND PAY FOR REQUIRED HAULING PERMITS, DUMPING FEES AND CHARGES.
- 30. ELECTRICAL, MECHANICAL AND PLUMBING TO BE REMOVED TO THE FURTHEST TERMINATION POINT ON THE FLOOR. REMOVE ALL UNUSED AND DISCONNECTED HVAC, ELECTRICAL, PLUMBING AND PHONE EQUIPMENT ABOVE CEILING AND REMOVE TO THE FURTHEST TERMINATION POINT ON THE FLOOR. COORDINATE EXTENT OF REMOVAL WITH MECHANICAL/ ELECTRICAL/PLUMBING DRAWINGS.
- 31. FURNISH A SYSTEM OF TEMPORARY LIGHTS THROUGHOUT THE SPACE UNDER CONSTRUCTION AS REQUIRED.
- 32. MAINTAIN FULLY CHARGED FIRE EXTINGUISHER READILY AVAILABLE DURING ALL DEMOLITION OPERATIONS.
- 33. UPON COMPLETION OF DEMOLITION WORK, PROVIDE THAT ALL AREAS BE LEFT CLEAN IN A BROOM -SWEPT CONDITION

PATCHING AND CLEANING

THE GENERAL CONTRACTOR SHALL DO ALL CUTTING, FITTING, AND PATCHING WORK THAT MAY BE REQUIRED TO MAKE ALL PARTS COME TOGETHER PROPERLY AND FIT TO RECEIVE OR BE RECEIVED BY WORK OF OTHER CONTRACTOR SHOWN UPON OR REASONABLY IMPLIED BY THE DRAWINGS AND NOTES

PROVIDE FLOOR CUTOUTS AND PATCHING REQUIRED FOR THE INSTALLATION OF WORK, TYPICAL

SURVEY ALL EXISTING FINISHED SURFACES TO INCLUDE CORNER BEADS, STOPS, ETC FOR CHIPS, CRACK HOLES, DAMAGED SURFACES, MARBLE WAINSCOT AND PLASTER CEILING WHENEVER DOOR DUCKS HAVE BEEN REMOVED, AND ANY OTHER DEFECTS CAUSING AN APPEARANCE DIFFERENT FR40M A NEW FIRST CLASS FINISHED REPAIRING, THEN GENERAL CONTRACTOR SHALL REMOVE ALL EXISTING AND INSTALL NEW SURFACES TO THE SATISFACTION OF ARCHITECT. ALL OTHER DAMAGED SURFACES (FINISHED FLOOR SLAB, CONVECTOR ENCLOSURES, ETC) SHALL BE REPAIRED TO THE SATISFACTION OF ARCHITECT

THE GENERAL CONTRACTOR SHALL INSPECT ALL EXISTING PLASTER SURFACES AND WHERE AS A RESULT OF DEMOLITION, FINISHED SURFACES DO NOT ALIGN, IF EXISTING PLASTER SHALL BE CHOPPED AWAY. NEW CORNER BEADS AND STOPS INSTALLED AND SURFACE RE-PLASTERED TO A SMOOTH, FLUSH, ALIGNED SURFACE

PROVIDE METAL LATH OVER NEW CONDUIT CHASES IN MASONRY PARTITIONS. TYPICAL, UNLESS NOTED OTHERWISE


DAMAGED EXISTING AREAS TO REMAIN AND EXISTING AREA AFFECTED BY DEMOLITION OR NEW CONSTRUCTION WORK SHOWN ON DRAWINGS SHALL BE PATCHED AS REQUIRED TO MATCH IMMEDIATE EXISTING ADJACENT AREAS IN MATERIALS, FIRE RATING, FINISH AND COLOR, TYPICAL, UNLESS NOTED OTHERWISE

FIRE PROOFING REMOVED FROM COLUMNS AND BEAMS DURING THE COURSE OF CONSTRUCTION SHALL BE REPLACED WITH THE SAME MATERIAL AND RATING AS THAT WHICH WAS REMOVED, TYPICAL, UNO

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



Ш

 \Box

PROJECT STATUS SSUED SET: SSUE DATE: 30 JAN 24 REVISIONS No. Description

DEMOLITION PLAN

HECKED BY:

- LEVEL 1

ROJECT NUMBER 236002-02

023 DEMOLISH SECTION OF FLOOR FOR ELEVATOR SHAFT 024 DEMOLISH EXISTING EXTERIOR DOOR.

026 DEMOLISH EXISTING CHAIN LINK FENCE. 032 SALVAGE AND RE-USE EXISTING STONE SILL 036 COORDINATE DEMOLITION OF SELECTED AREAS OF MASONRY WALL WITH FINISHED OPENING SIZES. PROVIDE TEMPORARY SUPPORT AND SHORING AS NEEDED. RE: STRUCTURAL AND ARCHITECTURAL DRAWINGS.

037 INFILL OPENING IN FLOOR 038 RELOCATE EXISTING MONUMENT SIGN TO LOCATION PROVIDED BY OWNER 039 DEMOLISH BRIDGE IN ITS ENTIRETY. KEEP EXISTING SANITARY SEWER APPROX 6' BELOW GRADE

INTACT. 040 DEMOLISH EXISTING METAL PARAPET COPING PRIOR TO INSTALLATION OF REPLACEMENT

052 REMOVE OLD PLYWOOD AND PHONE JACK. CLEAN AND PATCH WALL.

053 DEMOLISH EXISTING PIPING

DEMOLISH ALL EXISTING ELECTRICAL, MECHANICAL, AND PLUMBING EQUIPMENT ON ROOF, INCLUDING, BUT NOT LIMITED TO CONDUITS, VENTS, EXHAUSTS, AND ROOF DRAINS, TYPICAL, UNLESS NOTED OTHERWISE.

056 SALVAGE EXISTING WOOD CASINGS ON WINDOW EXTERIOR FOR RE-USE. RE: WINDOW DETAILS A7.1X SERIES.

 $A2^{\frac{\text{DEMOLITION PLAN - LEVEL 2}}{1/8" = 1'-0"}}$

(038)

______ - -- -- -- -- -√056 @ SEMICIRCULAR WINDOW @ SEMICIRCULAR

DEMOLITION GENERAL NOTES

DO NOT SCALE DRAWINGS. DIMENSIONS ARE NOT ADJUSTABLE WITHOUT ARCHITECT'S APPROVAL, UNLESS NOTED OTHERWISE/ REFER TO ARCHITECTURAL DRAFTING NOTES AN SHEET A0.01 FOR ADDITIONAL CLARIFICATIONS.

2. IF AN ITEM OF WORK CANNOT BE LOCATED, CLARIFY WITH ARCHITECT BEFORE PROCEEDING.

REFER TO ACM-SERIES DRAWINGS FOR ACM ABATEMENT.

5. REMOVE INTERIOR DOORS AND FRAMES PER PLAN.

4. REMOVE INTERIOR PARTITIONS PER PLAN.

6. DEMOLISH FLOORING. INCLUDING SUBFLOOR. TILE. CARPET. AND RAISED FLOOR

REMOVE PLUMBING FIXTURES PER PLAN. REMOVE PIPING AND ADDITIONAL FIRE PROTECTION AND PLUMBING PER PLUMBING DEMOLITION PLANS.

REMOVE HVAC DEVICES, DUCTS, AND PIPING PER MECHANICAL DEMOLITION

TO CONCRETE FLOOR SLAB, TYPICAL, UNLESS NOTED OTHERWISE.

DEMOLISH EXTERIOR DOORS AND WINDOWS, TYPICAL, UNLESS NOTED OTHERWISE. LEAVE EXISTING FRAME IN PLACE TO ANCHOR NEW WORK. RE:

10. REMOVE EXISTING CASEWORK, MILLWORK, SHELVING.

WINDOW DETAILS SHEETS A7.1X SERIES.

11. REMOVE PLASTER FINISH FROM INSIDE FACE OF MASONRY WALLS DOWN TO BRICK, TYPICAL. RE: ACM DRAWINGS FOR REQUIRED ABATEMENT.

DEMOLITION PLAN LEGEND

HARDWARE.

INDICATES EXISTING CONSTRUCTION TO BE DEMOLISHED TO LIMITS SHOWN ON DRAWINGS. PATCH, REPAIR, SMOOTH AND CLEAN ADJACENT FLOORS, WALLS AND CEILINGS AS REQUIRED TO PROVIDE SMOOTH SURFACE FOR NEW FINISHES

WALLS TO REMAIN

EXISTING DOOR, FRAME AND HARDWARE IS TO BE REMOVED; WALLS TO BE CLEANED, REPAIRED AND RE-FINISHED. SAVE ALL ITEMS FOR RE-USE UNLESS OTHERWISE NOTED. RE: STRUCTURAL

EXISTING DOOR, FRAME TO REMAIN. UPGRADE DOOR

DEMOLITION GENERAL NOTES (CONT'D)

15. THE WORK OF THIS PROJECT INCLUDES ALTERATIONS OF THE EXISTING BUILDING TO ACHIEVE THE ARRANGEMENT INDICATED ON THE DRAWINGS, THE CONTRACTOR SHALL VISIT THE JOB SITE TO DETERMINE THE EXTENT OF DEMOLITION WORK REQUIRED BY THE CONSTRUCTION ACTIVITIES. THE ARCHITECTURAL DRAWINGS FOR THESE AREAS SHOW THE CHANGES TO BE MADE. THE CONTRACTOR SHALL REVISE, REARRANGE, REROUTE OR REMOVE EXISTING WIRING AND HVAC DISTRIBUTION AS REQUIRED TO ACCOMMODATE THE CHANGES AND ADDITIONS SHOWN AND TO PROVIDE CONTINUING ELECTRICAL AND HVAC SERVICES FOR THOSE EXISTING PORTIONS OF THE PROJECT WHICH ARE TO REMAIN IN OPERATION. INTENT OF THE DRAWING IS TO SHOW EXISTING BUILDING CONDITIONS WITH INFORMATION DEVELOPED FROM AVAILABLE DOCUMENTS. CONTRACTOR SHALL MAKE A DETAILED SURVEY OF EXISTING CONDITIONS PERTAINING TO THE WORK BEFORE COMMENCING DEMOLITION. THE CONTRACTOR SHALL REPORT DISCREPANCIES BETWEEN DRAWINGS AND ACTUAL FIELD CONDITIONS TO THE ARCHITECT.

16. DEMOLITION NOT DESCRIBED HERE BUT NECESSARY FOR THE COMPLETION OF THE WORK SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. THE DEMOLITION DRAWINGS ARE ISSUED FOR INFORMATION ONLY AND SHOW THE GENERAL EXTENT OF THE DEMOLITION REQUIRED. THESE DRAWINGS DO NOT NECESSARILY SHOW EVERYTHING TO BE REMOVED IN ORDER TO PREPARE THE EXISTING BUILDING ELEMENTS FOR REMODELING OR NEW CONSTRUCTION. THE ARCHITECTURAL DRAWINGS SHOW THE EXISTING PARTITIONS WITH DOORS AND OTHER ITEMS TO REMAIN

17. FURNISH ALL LABOR AND MATERIAL REQUIRED TO COMPLETE DEMOLITION AND REMOVAL OF ALL ITEMS AS INDICATED IN ARCHITECT'S DRAWINGS OR AS OTHERWISE DIRECTED BY ARCHITECT,

18. FURNISH BUILDING MANAGEMENT AND ARCHITECT WITH A COMPLETE INVENTORY LIST OF ALL ITEMS THAT CAN BE REUSED AND/OR STORED IN BUILDING STOCK.

19. THE GENERAL CONTRACTOR SHALL EXECUTE ALL WORK WITH THE REGULATIONS OF THE BUILDING FOR DEMOLITION AND REMOVAL OF DEBRIS, INCLUDING OVERTIME WORK REQUIRED.

20. PROTECT THE PROPERTY OF THE BUILDING OWNER INCLUDING BUT NOT LIMITED TO, WINDOWS, FLOOR AND CEILING TILE, PUBLIC TOILETS, ELEVATORS, DOORS, BUCKS, ELECTRICAL AND AIR CONDITIONING EQUIPMENT, CONVECTOR ENCLOSURES, ETC. THE CONTRACTOR SHALL AT NO TIME DO ANY WORK OR PLACE ANY CONSTRUCTION THAT MAY AFFECT THE OPERATIONS OF THE OTHER TENANTS, INCLUDING ANY INTERRUPTIONS IN THE SUPPLY OF POWER OR OTHER UTILITIES WITHOUT FIRST NOTIFYING THE BUILDING OWNER AND OBTAINING PERMISSION TO PROCEED.

21. PROVIDE VISQUEEN SEAL FROM FLOOR TO CEILING AT ALL INTERFACES TO PROTECT ADJACENT BUILDING PROPERTY WHILE DEMOLITION AND CONSTRUCTION ARE IN PROGRESS. THIS SEAL IS TO BE KEPT CLOSED AT ALL

22. IN AREAS WHERE THERE ARE NO ALTERATIONS INDICATED THE EXISTING FACILITIES SHALL BE RETAINED IN SERVICE. IN CASE OF DOUBT ASSUME THAT THE EXISTING ELECTRICAL WIRING IS TO REMAIN IN OPERATION THROUGHOUT THE CONSTRUCTION PERIOD AND THEREAFTER.

23. WHERE CONSTRUCTION TO BE REMOVED INTERSECTS CONSTRUCTION TO REMAIN, WORK SHALL INCLUDE ALL ATTACHMENT DEVICES (SHOT PINS, ANCHORS, LAG BOLTS, NAILS, NAILERS, SHIMS, (ETC)

24. IN AREAS WHERE DEMOLITION (REMOVAL OF TILE, CARPETING, PARTITIONS, (ETC) CAUSES AND UNEVENNESS IN SLAB, PATCH TO LEVEL THE SLAB TO RECEIVE NEW FINISHED FLOORING, TYPICAL, UNLESS NOTED OTHERWISE.

25. REMOVE DEMOLISHED WORK FROM THE PREMISES EXCEPT ITEMS TO BE REUSED OR RETURNED TO TENANT OR AS OTHERWISE NOTED.

26. UPON THE REMOVAL OF THE EXISTING CEILING, THE EXISTING MECHANICAL SYSTEM WILL BE EVALUATED BY THE ENGINEER FOR POSSIBILITY FOR RE-USE, IF THE EXISTING MECHANICAL SYSTEMS ARE TO BE REUSED, EXISTING MAIN DUCT, VAV BOXES, PNEUMATIC CONTROL TUBING ETC SHALL REMAIN AND SHALL BE PROTECTED TO AVOID DAMAGE TO EXISTING HVAC EQUIPMENT DURING DEMOLITION

 CAP AND FLUSH OFF BEHIND FINISH SURFACES ALL PROJECTING PLUMBING, FLOOR ELECTRICAL/TELEPHONE OUTLETS, AND ALL OTHER PROJECTING ITEMS WHICH ARE BEING ABANDONED.

28. THE GENERAL CONTRACTOR SHALL REMOVE FROM PREMISES CONDUITS LEFT AFTER WALL DEMOLITION, INCLUDING SWITCH BOXES, PLATES, BRIDGES OR ANY OTHER TELEPHONE OR ELECTRICAL WIRING AND EQUIPMENT.

29. REMOVED MATERIAL OTHER THAN ITEMS TO BE SALVAGED OR REUSED SHALL BECOME CONTRACTORS' PROPERTY UNLESS OTHERWISE NOTIFIED AND SHALL BE REMOVED FROM OWNERS PROPERTY. CLEAN UP AND DISPOSE OF DEBRIS PROMPTLY AND CONTINUOUSLY AS WORK PROGRESSES. SECURE AND PAY FOR REQUIRED HAULING PERMITS, DUMPING FEES AND CHARGES.

30. ELECTRICAL, MECHANICAL AND PLUMBING TO BE REMOVED TO THE FURTHEST TERMINATION POINT ON THE FLOOR. REMOVE ALL UNUSED AND DISCONNECTED HVAC, ELECTRICAL, PLUMBING AND PHONE EQUIPMENT ABOVE CEILING AND REMOVE TO THE FURTHEST TERMINATION POINT ON THE FLOOR. COORDINATE EXTENT OF REMOVAL WITH MECHANICAL/ ELECTRICAL/PLUMBING DRAWINGS.

31. FURNISH A SYSTEM OF TEMPORARY LIGHTS THROUGHOUT THE SPACE UNDER CONSTRUCTION AS REQUIRED.

32. MAINTAIN FULLY CHARGED FIRE EXTINGUISHER READILY AVAILABLE DURING ALL DEMOLITION OPERATIONS.

33. UPON COMPLETION OF DEMOLITION WORK, PROVIDE THAT ALL AREAS BE LEFT CLEAN IN A BROOM -SWEPT CONDITION

PATCHING AND CLEANING

THE GENERAL CONTRACTOR SHALL DO ALL CUTTING, FITTING, AND PATCHING WORK THAT MAY BE REQUIRED TO MAKE ALL PARTS COME TOGETHER PROPERLY AND FIT TO RECEIVE OR BE RECEIVED BY WORK OF OTHER CONTRACTOR SHOWN UPON OR REASONABLY IMPLIED BY THE DRAWINGS AND NOTES

PROVIDE FLOOR CUTOUTS AND PATCHING REQUIRED FOR THE INSTALLATION OF WORK, TYPICAL

SURVEY ALL EXISTING FINISHED SURFACES TO INCLUDE CORNER BEADS, STOPS, ETC FOR CHIPS, CRACK HOLES, DAMAGED SURFACES, MARBLE WAINSCOT AND PLASTER CEILING WHENEVER DOOR DUCKS HAVE BEEN REMOVED. AND ANY OTHER DEFECTS CAUSING AN APPEARANCE DIFFERENT FR40M A NEW FIRST CLASS FINISHED REPAIRING, THEN GENERAL CONTRACTOR SHALL REMOVE ALL EXISTING AND INSTALL NEW SURFACES TO THE SATISFACTION OF ARCHITECT. ALL OTHER DAMAGED SURFACES (FINISHED FLOOR SLAB, CONVECTOR ENCLOSURES, ETC) SHALL BE REPAIRED TO THE SATISFACTION OF ARCHITECT

THE GENERAL CONTRACTOR SHALL INSPECT ALL EXISTING PLASTER SURFACES AND WHERE AS A RESULT OF DEMOLITION, FINISHED SURFACES DO NOT ALIGN, IF EXISTING PLASTER SHALL BE CHOPPED AWAY, NEW CORNER BEADS AND STOPS INSTALLED AND SURFACE RE-PLASTERED TO A SMOOTH, FLUSH, ALIGNED SURFACE

PROVIDE METAL LATH OVER NEW CONDUIT CHASES IN MASONRY PARTITIONS, TYPICAL, UNLESS NOTED OTHERWISE

DAMAGED EXISTING AREAS TO REMAIN AND EXISTING AREA AFFECTED BY DEMOLITION OR NEW CONSTRUCTION WORK SHOWN ON DRAWINGS SHALL BE PATCHED AS REQUIRED TO MATCH IMMEDIATE EXISTING ADJACENT AREAS IN MATERIALS, FIRE RATING, FINISH AND COLOR, TYPICAL, UNLESS NOTED OTHERWISE


FIRE PROOFING REMOVED FROM COLUMNS AND BEAMS DURING THE COURSE OF CONSTRUCTION SHALL BE REPLACED WITH THE SAME MATERIAL AND RATING AS THAT WHICH WAS REMOVED, TYPICAL, UNO

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



PROJECT STATUS SSUED SET: SSUE DATE: 30 JAN 24 REVISIONS

No. Description

DEMOLITION PLAN

- LEVEL 2

HECKED BY: ROJECT NUMBER

236002-02

LEVEL 2 223.17'

EXISTING PORTICO TO REMAIN IN

DEMO EXISTING CONCRETE BRIDGE STRUCTURE, INCLUDING | 054 | DEMOLISH ALL EXISTING ELECTRICAL, MECHANICAL, AND PLUMBING EQUIPMENT ON ROOF INCLUDING, BUT NOT LIMITED TO CONDUITS, VENTS, EXHAUSTS, AND ROOF DRAINS, TYPICAL, UNLESS NOTED OTHERWISE.

DEMOLISH EXISTING COPING

PRIOR TO INSTALLING NEW

 $A1 \frac{\text{DEMOLITION PLAN - LEVEL 3}}{1/8" = 1'-0"}$

055 REMOVE EXISTING CONDUITS

─⟨023⟩

ARCHITECTURAL DRAWINGS.

DEMOLITION GENERAL NOTES

- . DO NOT SCALE DRAWINGS. DIMENSIONS ARE NOT ADJUSTABLE WITHOUT ARCHITECT'S APPROVAL, UNLESS NOTED OTHERWISE/ REFER TO ARCHITECTURAL DRAFTING NOTES AN SHEET A0.01 FOR ADDITIONAL CLARIFICATIONS.
- . IF AN ITEM OF WORK CANNOT BE LOCATED, CLARIFY WITH ARCHITECT BEFORE PROCEEDING.
- REFER TO ACM-SERIES DRAWINGS FOR ACM ABATEMENT.

5. REMOVE INTERIOR DOORS AND FRAMES PER PLAN.

- 4. REMOVE INTERIOR PARTITIONS PER PLAN.
- 6. DEMOLISH FLOORING, INCLUDING SUBFLOOR, TILE, CARPET, AND RAISED FLOOR

TO CONCRETE FLOOR SLAB, TYPICAL, UNLESS NOTED OTHERWISE.


- 7. REMOVE PLUMBING FIXTURES PER PLAN. REMOVE PIPING AND ADDITIONAL FIRE PROTECTION AND PLUMBING PER PLUMBING DEMOLITION PLANS.
- . REMOVE HVAC DEVICES, DUCTS, AND PIPING PER MECHANICAL DEMOLITION
- 9. DEMOLISH EXTERIOR DOORS AND WINDOWS, TYPICAL, UNLESS NOTED OTHERWISE. LEAVE EXISTING FRAME IN PLACE TO ANCHOR NEW WORK. RE:
- 10. REMOVE EXISTING CASEWORK, MILLWORK, SHELVING.
- 11. REMOVE PLASTER FINISH FROM INSIDE FACE OF MASONRY WALLS DOWN TO BRICK, TYPICAL. RE: ACM DRAWINGS FOR REQUIRED ABATEMENT.

DEMOLITION PLAN LEGEND

WINDOW DETAILS SHEETS A7.1X SERIES.

INDICATES EXISTING CONSTRUCTION TO BE DEMOLISHED TO LIMITS SHOWN ON DRAWINGS. PATCH, REPAIR, SMOOTH AND CLEAN ADJACENT FLOORS, WALLS AND CEILINGS AS REQUIRED TO PROVIDE SMOOTH SURFACE FOR NEW FINISHES

WALLS TO REMAIN EXISTING DOOR, FRAME TO REMAIN. UPGRADE DOOR HARDWARE.



EXISTING DOOR, FRAME AND HARDWARE IS TO BE REMOVED; WALLS TO BE CLEANED, REPAIRED AND RE-FINISHED. SAVE ALL ITEMS FOR RE-USE UNLESS OTHERWISE NOTED. RE: STRUCTURAL

DEMOLITION GENERAL NOTES (CONT'D)

- 15. THE WORK OF THIS PROJECT INCLUDES ALTERATIONS OF THE EXISTING BUILDING TO ACHIEVE THE ARRANGEMENT INDICATED ON THE DRAWINGS, THE CONTRACTOR SHALL VISIT THE JOB SITE TO DETERMINE THE EXTENT OF DEMOLITION WORK REQUIRED BY THE CONSTRUCTION ACTIVITIES. THE ARCHITECTURAL DRAWINGS FOR THESE AREAS SHOW THE CHANGES TO BE MADE. THE CONTRACTOR SHALL REVISE, REARRANGE, REROUTE OR REMOVE EXISTING WIRING AND HVAC DISTRIBUTION AS REQUIRED TO ACCOMMODATE THE CHANGES AND ADDITIONS SHOWN AND TO PROVIDE CONTINUING ELECTRICAL AND HVAC SERVICES FOR THOSE EXISTING PORTIONS OF THE PROJECT WHICH ARE TO REMAIN IN OPERATION. INTENT OF THE DRAWING IS TO SHOW EXISTING BUILDING CONDITIONS WITH INFORMATION DEVELOPED FROM AVAILABLE DOCUMENTS. CONTRACTOR SHALL MAKE A DETAILED SURVEY OF EXISTING CONDITIONS PERTAINING TO THE WORK BEFORE COMMENCING DEMOLITION. THE CONTRACTOR SHALL REPORT DISCREPANCIES BETWEEN DRAWINGS AND ACTUAL FIELD CONDITIONS TO THE ARCHITECT.
- 16. DEMOLITION NOT DESCRIBED HERE BUT NECESSARY FOR THE COMPLETION OF THE WORK SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. THE DEMOLITION DRAWINGS ARE ISSUED FOR INFORMATION ONLY AND SHOW THE GENERAL EXTENT OF THE DEMOLITION REQUIRED. THESE DRAWINGS DO NOT NECESSARILY SHOW EVERYTHING TO BE REMOVED IN ORDER TO PREPARE THE EXISTING BUILDING ELEMENTS FOR REMODELING OR NEW CONSTRUCTION. THE ARCHITECTURAL DRAWINGS SHOW THE EXISTING PARTITIONS WITH DOORS AND OTHER ITEMS TO REMAIN
- 17. FURNISH ALL LABOR AND MATERIAL REQUIRED TO COMPLETE DEMOLITION AND REMOVAL OF ALL ITEMS AS INDICATED IN ARCHITECT'S DRAWINGS OR AS OTHERWISE DIRECTED BY ARCHITECT.
- 18. FURNISH BUILDING MANAGEMENT AND ARCHITECT WITH A COMPLETE INVENTORY LIST OF ALL ITEMS THAT CAN BE REUSED AND/OR STORED IN BUILDING STOCK.
- 19. THE GENERAL CONTRACTOR SHALL EXECUTE ALL WORK WITH THE REGULATIONS OF THE BUILDING FOR DEMOLITION AND REMOVAL OF DEBRIS, INCLUDING OVERTIME WORK REQUIRED.
- 20. PROTECT THE PROPERTY OF THE BUILDING OWNER INCLUDING BUT NOT LIMITED TO, WINDOWS, FLOOR AND CEILING TILE, PUBLIC TOILETS, ELEVATORS, DOORS, BUCKS, ELECTRICAL AND AIR CONDITIONING EQUIPMENT, CONVECTOR ENCLOSURES, ETC. THE CONTRACTOR SHALL AT NO TIME DO ANY WORK OR PLACE ANY CONSTRUCTION THAT MAY AFFECT THE OPERATIONS OF THE OTHER TENANTS, INCLUDING ANY INTERRUPTIONS IN THE SUPPLY OF POWER OR OTHER UTILITIES WITHOUT FIRST NOTIFYING THE BUILDING OWNER AND OBTAINING PERMISSION TO PROCEED.
- 21. PROVIDE VISQUEEN SEAL FROM FLOOR TO CEILING AT ALL INTERFACES TO PROTECT ADJACENT BUILDING PROPERTY WHILE DEMOLITION AND CONSTRUCTION ARE IN PROGRESS. THIS SEAL IS TO BE KEPT CLOSED AT ALL
- 22. IN AREAS WHERE THERE ARE NO ALTERATIONS INDICATED THE EXISTING FACILITIES SHALL BE RETAINED IN SERVICE. IN CASE OF DOUBT ASSUME THAT THE EXISTING ELECTRICAL WIRING IS TO REMAIN IN OPERATION THROUGHOUT THE CONSTRUCTION PERIOD AND THEREAFTER.

23. WHERE CONSTRUCTION TO BE REMOVED INTERSECTS CONSTRUCTION TO

FINISHED FLOORING, TYPICAL, UNLESS NOTED OTHERWISE.

REMAIN, WORK SHALL INCLUDE ALL ATTACHMENT DEVICES (SHOT PINS, ANCHORS, LAG BOLTS, NAILS, NAILERS, SHIMS, (ETC) 24. IN AREAS WHERE DEMOLITION (REMOVAL OF TILE, CARPETING, PARTITIONS, (ETC)

CAUSES AND UNEVENNESS IN SLAB, PATCH TO LEVEL THE SLAB TO RECEIVE NEW

- 25. REMOVE DEMOLISHED WORK FROM THE PREMISES EXCEPT ITEMS TO BE REUSED OR RETURNED TO TENANT OR AS OTHERWISE NOTED.
- 26. UPON THE REMOVAL OF THE EXISTING CEILING, THE EXISTING MECHANICAL SYSTEM WILL BE EVALUATED BY THE ENGINEER FOR POSSIBILITY FOR RE-USE, IF THE EXISTING MECHANICAL SYSTEMS ARE TO BE REUSED, EXISTING MAIN DUCT, VAV BOXES. PNEUMATIC CONTROL TUBING ETC SHALL REMAIN AND SHALL BE PROTECTED TO AVOID DAMAGE TO EXISTING HVAC EQUIPMENT DURING
- 27. CAP AND FLUSH OFF BEHIND FINISH SURFACES ALL PROJECTING PLUMBING. FLOOR ELECTRICAL/TELEPHONE OUTLETS, AND ALL OTHER PROJECTING ITEMS WHICH ARE BEING ABANDONED.
- 28. THE GENERAL CONTRACTOR SHALL REMOVE FROM PREMISES CONDUITS LEFT AFTER WALL DEMOLITION, INCLUDING SWITCH BOXES, PLATES, BRIDGES OR ANY OTHER TELEPHONE OR ELECTRICAL WIRING AND EQUIPMENT.
- 29. REMOVED MATERIAL OTHER THAN ITEMS TO BE SALVAGED OR REUSED SHALL BECOME CONTRACTORS' PROPERTY UNLESS OTHERWISE NOTIFIED AND SHALL BE REMOVED FROM OWNERS PROPERTY. CLEAN UP AND DISPOSE OF DEBRIS PROMPTLY AND CONTINUOUSLY AS WORK PROGRESSES. SECURE AND PAY FOR REQUIRED HAULING PERMITS, DUMPING FEES AND CHARGES.
- 30. ELECTRICAL, MECHANICAL AND PLUMBING TO BE REMOVED TO THE FURTHEST TERMINATION POINT ON THE FLOOR. REMOVE ALL UNUSED AND DISCONNECTED HVAC, ELECTRICAL, PLUMBING AND PHONE EQUIPMENT ABOVE CEILING AND REMOVE TO THE FURTHEST TERMINATION POINT ON THE FLOOR. COORDINATE EXTENT OF REMOVAL WITH MECHANICAL/ ELECTRICAL/PLUMBING DRAWINGS.
- 31. FURNISH A SYSTEM OF TEMPORARY LIGHTS THROUGHOUT THE SPACE UNDER CONSTRUCTION AS REQUIRED.
- 32. MAINTAIN FULLY CHARGED FIRE EXTINGUISHER READILY AVAILABLE DURING ALL DEMOLITION OPERATIONS.
- 33. UPON COMPLETION OF DEMOLITION WORK, PROVIDE THAT ALL AREAS BE LEFT CLEAN IN A BROOM -SWEPT CONDITION

PATCHING AND CLEANING

DEMOLITION

THE GENERAL CONTRACTOR SHALL DO ALL CUTTING, FITTING, AND PATCHING WORK THAT MAY BE REQUIRED TO MAKE ALL PARTS COME TOGETHER PROPERLY AND FIT TO RECEIVE OR BE RECEIVED BY WORK OF OTHER CONTRACTOR SHOWN UPON OR REASONABLY IMPLIED BY THE DRAWINGS AND NOTES

PROVIDE FLOOR CUTOUTS AND PATCHING REQUIRED FOR THE INSTALLATION OF WORK, TYPICAL

SURVEY ALL EXISTING FINISHED SURFACES TO INCLUDE CORNER BEADS, STOPS, ETC FOR CHIPS, CRACK HOLES, DAMAGED SURFACES, MARBLE WAINSCOT AND PLASTER CEILING WHENEVER DOOR DUCKS HAVE BEEN REMOVED, AND ANY OTHER DEFECTS CAUSING AN APPEARANCE DIFFERENT FR40M A NEW FIRST CLASS FINISHED REPAIRING, THEN GENERAL CONTRACTOR SHALL REMOVE ALL EXISTING AND INSTALL NEW SURFACES TO THE SATISFACTION OF ARCHITECT. ALL OTHER DAMAGED SURFACES (FINISHED FLOOR SLAB, CONVECTOR ENCLOSURES, ETC) SHALL BE REPAIRED TO THE SATISFACTION OF ARCHITECT

THE GENERAL CONTRACTOR SHALL INSPECT ALL EXISTING PLASTER SURFACES AND WHERE AS A RESULT OF DEMOLITION, FINISHED SURFACES DO NOT ALIGN, IF EXISTING PLASTER SHALL BE CHOPPED AWAY. NEW CORNER BEADS AND STOPS INSTALLED AND SURFACE RE-PLASTERED TO A SMOOTH, FLUSH, ALIGNED SURFACE

PROVIDE METAL LATH OVER NEW CONDUIT CHASES IN MASONRY PARTITIONS. TYPICAL, UNLESS NOTED OTHERWISE

DAMAGED EXISTING AREAS TO REMAIN AND EXISTING AREA AFFECTED BY DEMOLITION OR NEW CONSTRUCTION WORK SHOWN ON DRAWINGS SHALL BE PATCHED AS REQUIRED TO MATCH IMMEDIATE EXISTING ADJACENT AREAS IN MATERIALS, FIRE RATING, FINISH AND COLOR, TYPICAL, UNLESS NOTED OTHERWISE


FIRE PROOFING REMOVED FROM COLUMNS AND BEAMS DURING THE COURSE OF CONSTRUCTION SHALL BE REPLACED WITH THE SAME MATERIAL AND RATING AS THAT WHICH WAS REMOVED, TYPICAL, UNO

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract





PROJECT STATUS SSUED SET: SSUE DATE: 30 JAN 24 REVISIONS No. Description

DEMOLITION PLAN

HECKED BY:

- LEVEL 3

ROJECT NUMBER 236002-02


DEMOLISH EXISTING SKYLIGHT; INFILL OPENING
 DEMOLISH EXISTING ELEVATOR PENTHOUSE
 DEMOLISH EXISTING CONCRETE PAD

DEMOLISH EXISTING PARAPET AND CORNICE AS NEEDED TO ACCMMODATE NEW CONSTRUCTION
 DEMOLISH SECTION OF ROOF FOR ELEVATOR SHAFT

051 DEMOLISH EXISTING ROOF LADDER

DEMOLISH EXISTING ROOF LADDER

DEMOLISH ALL EXISTING ELECTRICAL, MECHANICAL, AND PLUMBING EQUIPMENT ON ROOF, INCLUDING, BUT NOT LIMITED TO CONDUITS, VENTS, EXHAUSTS, AND ROOF DRAINS, TYPICAL, UNLESS NOTED OTHERWISE.

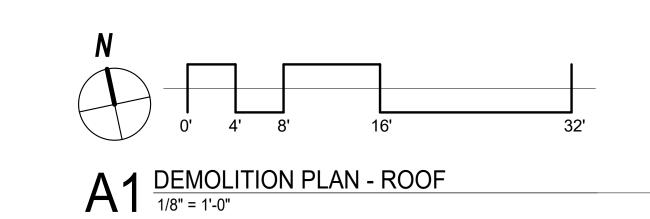

ROOF DEMOLITION GENERAL NOTES

- 1. DO NOT SCALE DRAWINGS. DIMENSIONS ARE NOT ADJUSTABLE WITHOUT ARCHITECT'S APPROVAL, UNLESS NOTED OTHERWISE/ REFER TO ARCHITECTURAL DRAFTING NOTES AND SHEET A0.01 FOR ADDITIONAL CLARIFICATIONS.
- 2. IF AN ITEM OF WORK CANNOT BE LOCATED, CLARIFY WITH ARCHITECT BEFORE PROCEEDING.
- 3. REFER TO SPECIFICATIONS FOR PHASING AND ADD ALTERNATES DESCRIPTION
- 4. REFER TO ACM-SERIES DRAWINGS AND SPECIFICATIONS FOR REMOVAL OF ASBESTOS CONTAINING MATERIALS.
- 5. REMOVE EXISTING ROOF TO STRUCTURAL DECK, TYPICAL, UNLESS NOTED OTHERWISE.
- 6. REMOVE EXISTING METAL ROOF COPINGS, TYPICAL, UNLESS NOTED OTHERWISE/
- 7. REMOVE EXISTING HVAC DEVICES, DUCTWORK, EQUIPMENT, TYPICAL, UNLESS NOTED OTHERWISE. RE: MECHANICAL PLANS.
- 8. REMOVE EXISTING ELECTRICAL WIRING, CONDUIT, DEVICES, AND CABLING, TYPICAL, UNLESS NOTED OTHERWISE. RE: ELECTRICAL DEMOLITION PLANS.

DEMOLITION PLAN LEGEND


INDICATES EXISTING CONSTRUCTION TO BE DEMOLISHED TO LIMITS SHOWN ON DRAWINGS. PATCH, REPAIR, SMOOTH AND CLEAN ADJACENT FLOORS, WALLS AND CEILINGS AS REQUIRED TO PROVIDE SMOOTH SURFACE FOR NEW

FINISHES

HARDWARE.

WALLS TO REMAIN

EXISTING DOOR, FRAME TO REMAIN. UPGRADE DOOR



EXISTING DOOR, FRAME AND HARDWARE IS TO BE REMOVED; WALLS TO BE CLEANED, REPAIRED AND REFINISHED. SAVE ALL ITEMS FOR RE-USE UNLESS OTHERWISE NOTED. RE: STRUCTURAL

A - GENERAL NOTES - DEMOLITION ROOF

DEMOLITION GENERAL NOTES (CONT'D)

- 15. THE WORK OF THIS PROJECT INCLUDES ALTERATIONS OF THE EXISTING BUILDING TO ACHIEVE THE ARRANGEMENT INDICATED ON THE DRAWINGS, THE CONTRACTOR SHALL VISIT THE JOB SITE TO DETERMINE THE EXTENT OF DEMOLITION WORK REQUIRED BY THE CONSTRUCTION ACTIVITIES. THE ARCHITECTURAL DRAWINGS FOR THESE AREAS SHOW THE CHANGES TO BE MADE. THE CONTRACTOR SHALL REVISE, REARRANGE, REROUTE OR REMOVE EXISTING WIRING AND HVAC DISTRIBUTION AS REQUIRED TO ACCOMMODATE THE CHANGES AND ADDITIONS SHOWN AND TO PROVIDE CONTINUING ELECTRICAL AND HVAC SERVICES FOR THOSE EXISTING PORTIONS OF THE PROJECT WHICH ARE TO REMAIN IN OPERATION. INTENT OF THE DRAWING IS TO SHOW EXISTING BUILDING CONDITIONS WITH INFORMATION DEVELOPED FROM AVAILABLE DOCUMENTS. CONTRACTOR SHALL MAKE A DETAILED SURVEY OF EXISTING CONDITIONS PERTAINING TO THE WORK BEFORE COMMENCING DEMOLITION. THE CONTRACTOR SHALL REPORT DISCREPANCIES BETWEEN DRAWINGS AND ACTUAL FIELD CONDITIONS TO THE ARCHITECT.
- 16. DEMOLITION NOT DESCRIBED HERE BUT NECESSARY FOR THE COMPLETION OF THE WORK SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. THE DEMOLITION DRAWINGS ARE ISSUED FOR INFORMATION ONLY AND SHOW THE GENERAL EXTENT OF THE DEMOLITION REQUIRED. THESE DRAWINGS DO NOT NECESSARILY SHOW EVERYTHING TO BE REMOVED IN ORDER TO PREPARE THE EXISTING BUILDING ELEMENTS FOR REMODELING OR NEW CONSTRUCTION. THE ARCHITECTURAL DRAWINGS SHOW THE EXISTING PARTITIONS WITH DOORS AND OTHER ITEMS TO REMAIN
- 17. FURNISH ALL LABOR AND MATERIAL REQUIRED TO COMPLETE DEMOLITION AND REMOVAL OF ALL ITEMS AS INDICATED IN ARCHITECT'S DRAWINGS OR AS OTHERWISE DIRECTED BY ARCHITECT,
- 18. FURNISH BUILDING MANAGEMENT AND ARCHITECT WITH A COMPLETE INVENTORY LIST OF ALL ITEMS THAT CAN BE REUSED AND/OR STORED IN BUILDING STOCK.
- 19. THE GENERAL CONTRACTOR SHALL EXECUTE ALL WORK WITH THE REGULATIONS OF THE BUILDING FOR DEMOLITION AND REMOVAL OF DEBRIS, INCLUDING OVERTIME WORK REQUIRED.
- 20. PROTECT THE PROPERTY OF THE BUILDING OWNER INCLUDING BUT NOT LIMITED TO, WINDOWS, FLOOR AND CEILING TILE, PUBLIC TOILETS, ELEVATORS, DOORS, BUCKS, ELECTRICAL AND AIR CONDITIONING EQUIPMENT, CONVECTOR ENCLOSURES, ETC. THE CONTRACTOR SHALL AT NO TIME DO ANY WORK OR PLACE ANY CONSTRUCTION THAT MAY AFFECT THE OPERATIONS OF THE OTHER TENANTS, INCLUDING ANY INTERRUPTIONS IN THE SUPPLY OF POWER OR OTHER UTILITIES WITHOUT FIRST NOTIFYING THE BUILDING OWNER AND OBTAINING PERMISSION TO PROCEED.
- 21. PROVIDE VISQUEEN SEAL FROM FLOOR TO CEILING AT ALL INTERFACES TO PROTECT ADJACENT BUILDING PROPERTY WHILE DEMOLITION AND CONSTRUCTION ARE IN PROGRESS, THIS SEAL IS TO BE KEPT CLOSED AT ALL TIMES.
- 22. IN AREAS WHERE THERE ARE NO ALTERATIONS INDICATED THE EXISTING FACILITIES SHALL BE RETAINED IN SERVICE. IN CASE OF DOUBT ASSUME THAT THE EXISTING ELECTRICAL WIRING IS TO REMAIN IN OPERATION THROUGHOUT THE CONSTRUCTION PERIOD AND THEREAFTER.

23. WHERE CONSTRUCTION TO BE REMOVED INTERSECTS CONSTRUCTION TO

REMAIN, WORK SHALL INCLUDE ALL ATTACHMENT DEVICES (SHOT PINS,

FINISHED FLOORING, TYPICAL, UNLESS NOTED OTHERWISE.

- ANCHORS, LAG BOLTS, NAILS, NAILERS, SHIMS, (ETC)

 24. IN AREAS WHERE DEMOLITION (REMOVAL OF TILE, CARPETING, PARTITIONS, (ETC)
 CAUSES AND UNEVENNESS IN SLAB, PATCH TO LEVEL THE SLAB TO RECEIVE NEW
- 25. REMOVE DEMOLISHED WORK FROM THE PREMISES EXCEPT ITEMS TO BE REUSED OR RETURNED TO TENANT OR AS OTHERWISE NOTED.
- 26. UPON THE REMOVAL OF THE EXISTING CEILING, THE EXISTING MECHANICAL SYSTEM WILL BE EVALUATED BY THE ENGINEER FOR POSSIBILITY FOR RE-USE, IF THE EXISTING MECHANICAL SYSTEMS ARE TO BE REUSED, EXISTING MAIN DUCT, VAV BOXES, PNEUMATIC CONTROL TUBING ETC SHALL REMAIN AND SHALL BE PROTECTED TO AVOID DAMAGE TO EXISTING HVAC EQUIPMENT DURING DEMOLITION
- 27. CAP AND FLUSH OFF BEHIND FINISH SURFACES ALL PROJECTING PLUMBING, FLOOR ELECTRICAL/TELEPHONE OUTLETS, AND ALL OTHER PROJECTING ITEMS WHICH ARE BEING ABANDONED.
- 28. THE GENERAL CONTRACTOR SHALL REMOVE FROM PREMISES CONDUITS LEFT AFTER WALL DEMOLITION, INCLUDING SWITCH BOXES, PLATES, BRIDGES OR ANY OTHER TELEPHONE OR ELECTRICAL WIRING AND EQUIPMENT.
- 29. REMOVED MATERIAL OTHER THAN ITEMS TO BE SALVAGED OR REUSED SHALL BECOME CONTRACTORS' PROPERTY UNLESS OTHERWISE NOTIFIED AND SHALL BE REMOVED FROM OWNERS PROPERTY. CLEAN UP AND DISPOSE OF DEBRIS PROMPTLY AND CONTINUOUSLY AS WORK PROGRESSES. SECURE AND PAY FOR REQUIRED HAULING PERMITS, DUMPING FEES AND CHARGES.
- 30. ELECTRICAL, MECHANICAL AND PLUMBING TO BE REMOVED TO THE FURTHEST TERMINATION POINT ON THE FLOOR. REMOVE ALL UNUSED AND DISCONNECTED HVAC, ELECTRICAL, PLUMBING AND PHONE EQUIPMENT ABOVE CEILING AND REMOVE TO THE FURTHEST TERMINATION POINT ON THE FLOOR. COORDINATE EXTENT OF REMOVAL WITH MECHANICAL/ ELECTRICAL/PLUMBING DRAWINGS.
- 31. FURNISH A SYSTEM OF TEMPORARY LIGHTS THROUGHOUT THE SPACE UNDER CONSTRUCTION AS REQUIRED.
- 32. MAINTAIN FULLY CHARGED FIRE EXTINGUISHER READILY AVAILABLE DURING ALL DEMOLITION OPERATIONS.
- **33.** UPON COMPLETION OF DEMOLITION WORK, PROVIDE THAT ALL AREAS BE LEFT CLEAN IN A BROOM -SWEPT CONDITION

PATCHING AND CLEANING

THE GENERAL CONTRACTOR SHALL DO ALL CUTTING, FITTING, AND PATCHING WORK THAT MAY BE REQUIRED TO MAKE ALL PARTS COME TOGETHER PROPERLY AND FIT TO RECEIVE OR BE RECEIVED BY WORK OF OTHER CONTRACTOR SHOWN UPON OR REASONABLY IMPLIED BY THE DRAWINGS AND NOTES

PROVIDE FLOOR CUTOUTS AND PATCHING REQUIRED FOR THE INSTALLATION OF WORK, TYPICAL

SURVEY ALL EXISTING FINISHED SURFACES TO INCLUDE CORNER BEADS, STOPS, ETC FOR CHIPS, CRACK HOLES, DAMAGED SURFACES, MARBLE WAINSCOT AND PLASTER CEILING WHENEVER DOOR DUCKS HAVE BEEN REMOVED, AND ANY OTHER DEFECTS CAUSING AN APPEARANCE DIFFERENT FR4OM A NEW FIRST CLASS FINISHED REPAIRING, THEN GENERAL CONTRACTOR SHALL REMOVE ALL EXISTING AND INSTALL NEW SURFACES TO THE SATISFACTION OF ARCHITECT. ALL OTHER DAMAGED SURFACES (FINISHED FLOOR SLAB, CONVECTOR ENCLOSURES, ETC) SHALL BE REPAIRED TO THE SATISFACTION OF ARCHITECT

THE GENERAL CONTRACTOR SHALL INSPECT ALL EXISTING PLASTER SURFACES AND WHERE AS A RESULT OF DEMOLITION, FINISHED SURFACES DO NOT ALIGN, IF EXISTING PLASTER SHALL BE CHOPPED AWAY, NEW CORNER BEADS AND STOPS INSTALLED AND SURFACE RE-PLASTERED TO A SMOOTH, FLUSH, ALIGNED SURFACE

PROVIDE METAL LATH OVER NEW CONDUIT CHASES IN MASONRY PARTITIONS, TYPICAL, UNLESS NOTED OTHERWISE

DAMAGED EXISTING AREAS TO REMAIN AND EXISTING AREA AFFECTED BY DEMOLITION OR NEW CONSTRUCTION WORK SHOWN ON DRAWINGS SHALL BE PATCHED AS REQUIRED TO MATCH IMMEDIATE EXISTING ADJACENT AREAS IN MATERIALS, FIRE RATING, FINISH AND COLOR, TYPICAL, UNLESS NOTED OTHERWISE

FIRE PROOFING REMOVED FROM COLUMNS AND BEAMS DURING THE COURSE OF CONSTRUCTION SHALL BE REPLACED WITH THE SAME MATERIAL AND RATING AS THAT WHICH WAS REMOVED, TYPICAL, UNO


KP

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



ID RENOVATION

OF ALABAMA - COLLEGE OF EDUCATION & COLLEG ATIONS AND INFORMATION SCIENCES SS SITY BOULEVARD, TUSCALOOSA, ALABAMA 35401

PACKAGE

OWNER

UNIVERS

COMIMU

DCM No. 202

PROJECT AI

918 UNIV

 \Box

PROJECT STATUS

SSUED SET:

SSUE DATE:

REVISIONS

No. Description

Date

DRAWING TITLE


DEMOLITION PLAN

DRAWN BY: CHECKED BY:

- ROOF

PROJECT NUMBER 236002-02

ДО 34

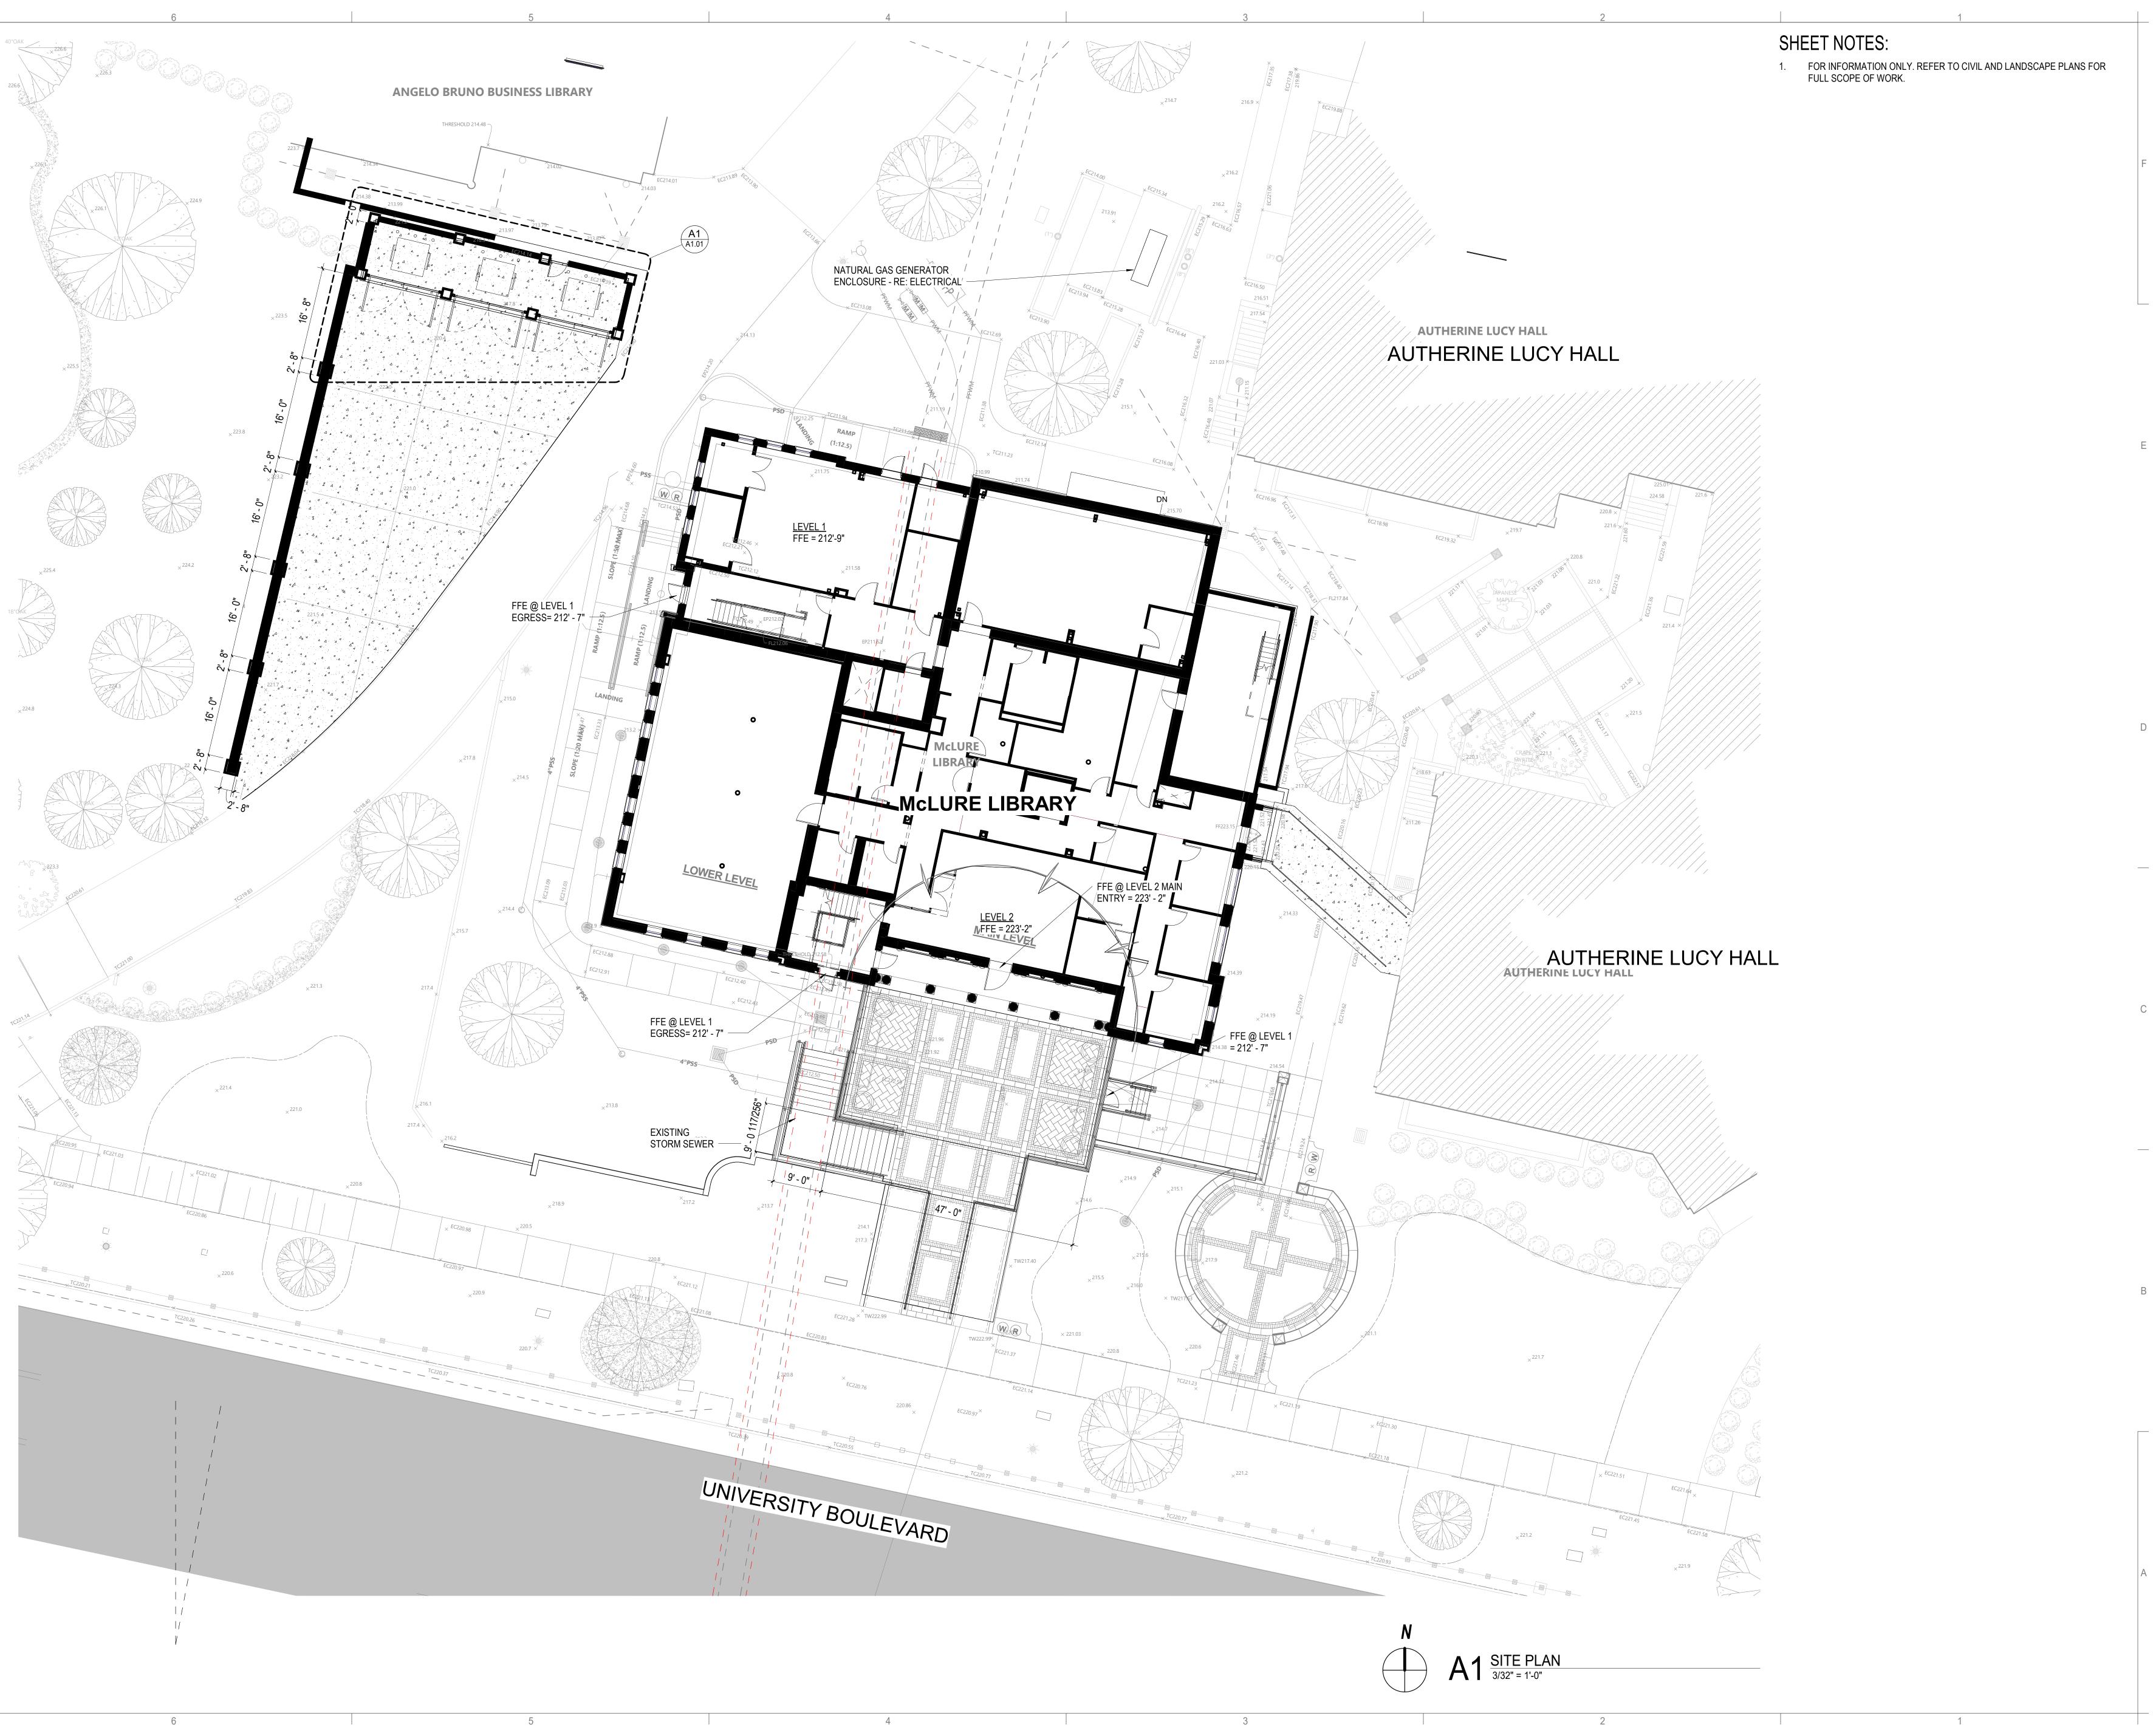

KPS

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125

www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract Documents.



RE LIBRARY ADDITION AND RENOVATION

Package 'D' - ADDITION AND RENOVATION

PACKAGE 'D' - ADDITION AND RENOVATION

PACKAGE 'D' - ADDITION AND RENOVATION

PROJECT STATUS

SSUED SET: BID SET

SSUE DATE: 30 JAN 24

REVISIONS


No. Description Date

ARCHITECTURAL
SITE PLAN

DRAWN BY: Au
CHECKED BY: Che

236002-02

A1.00

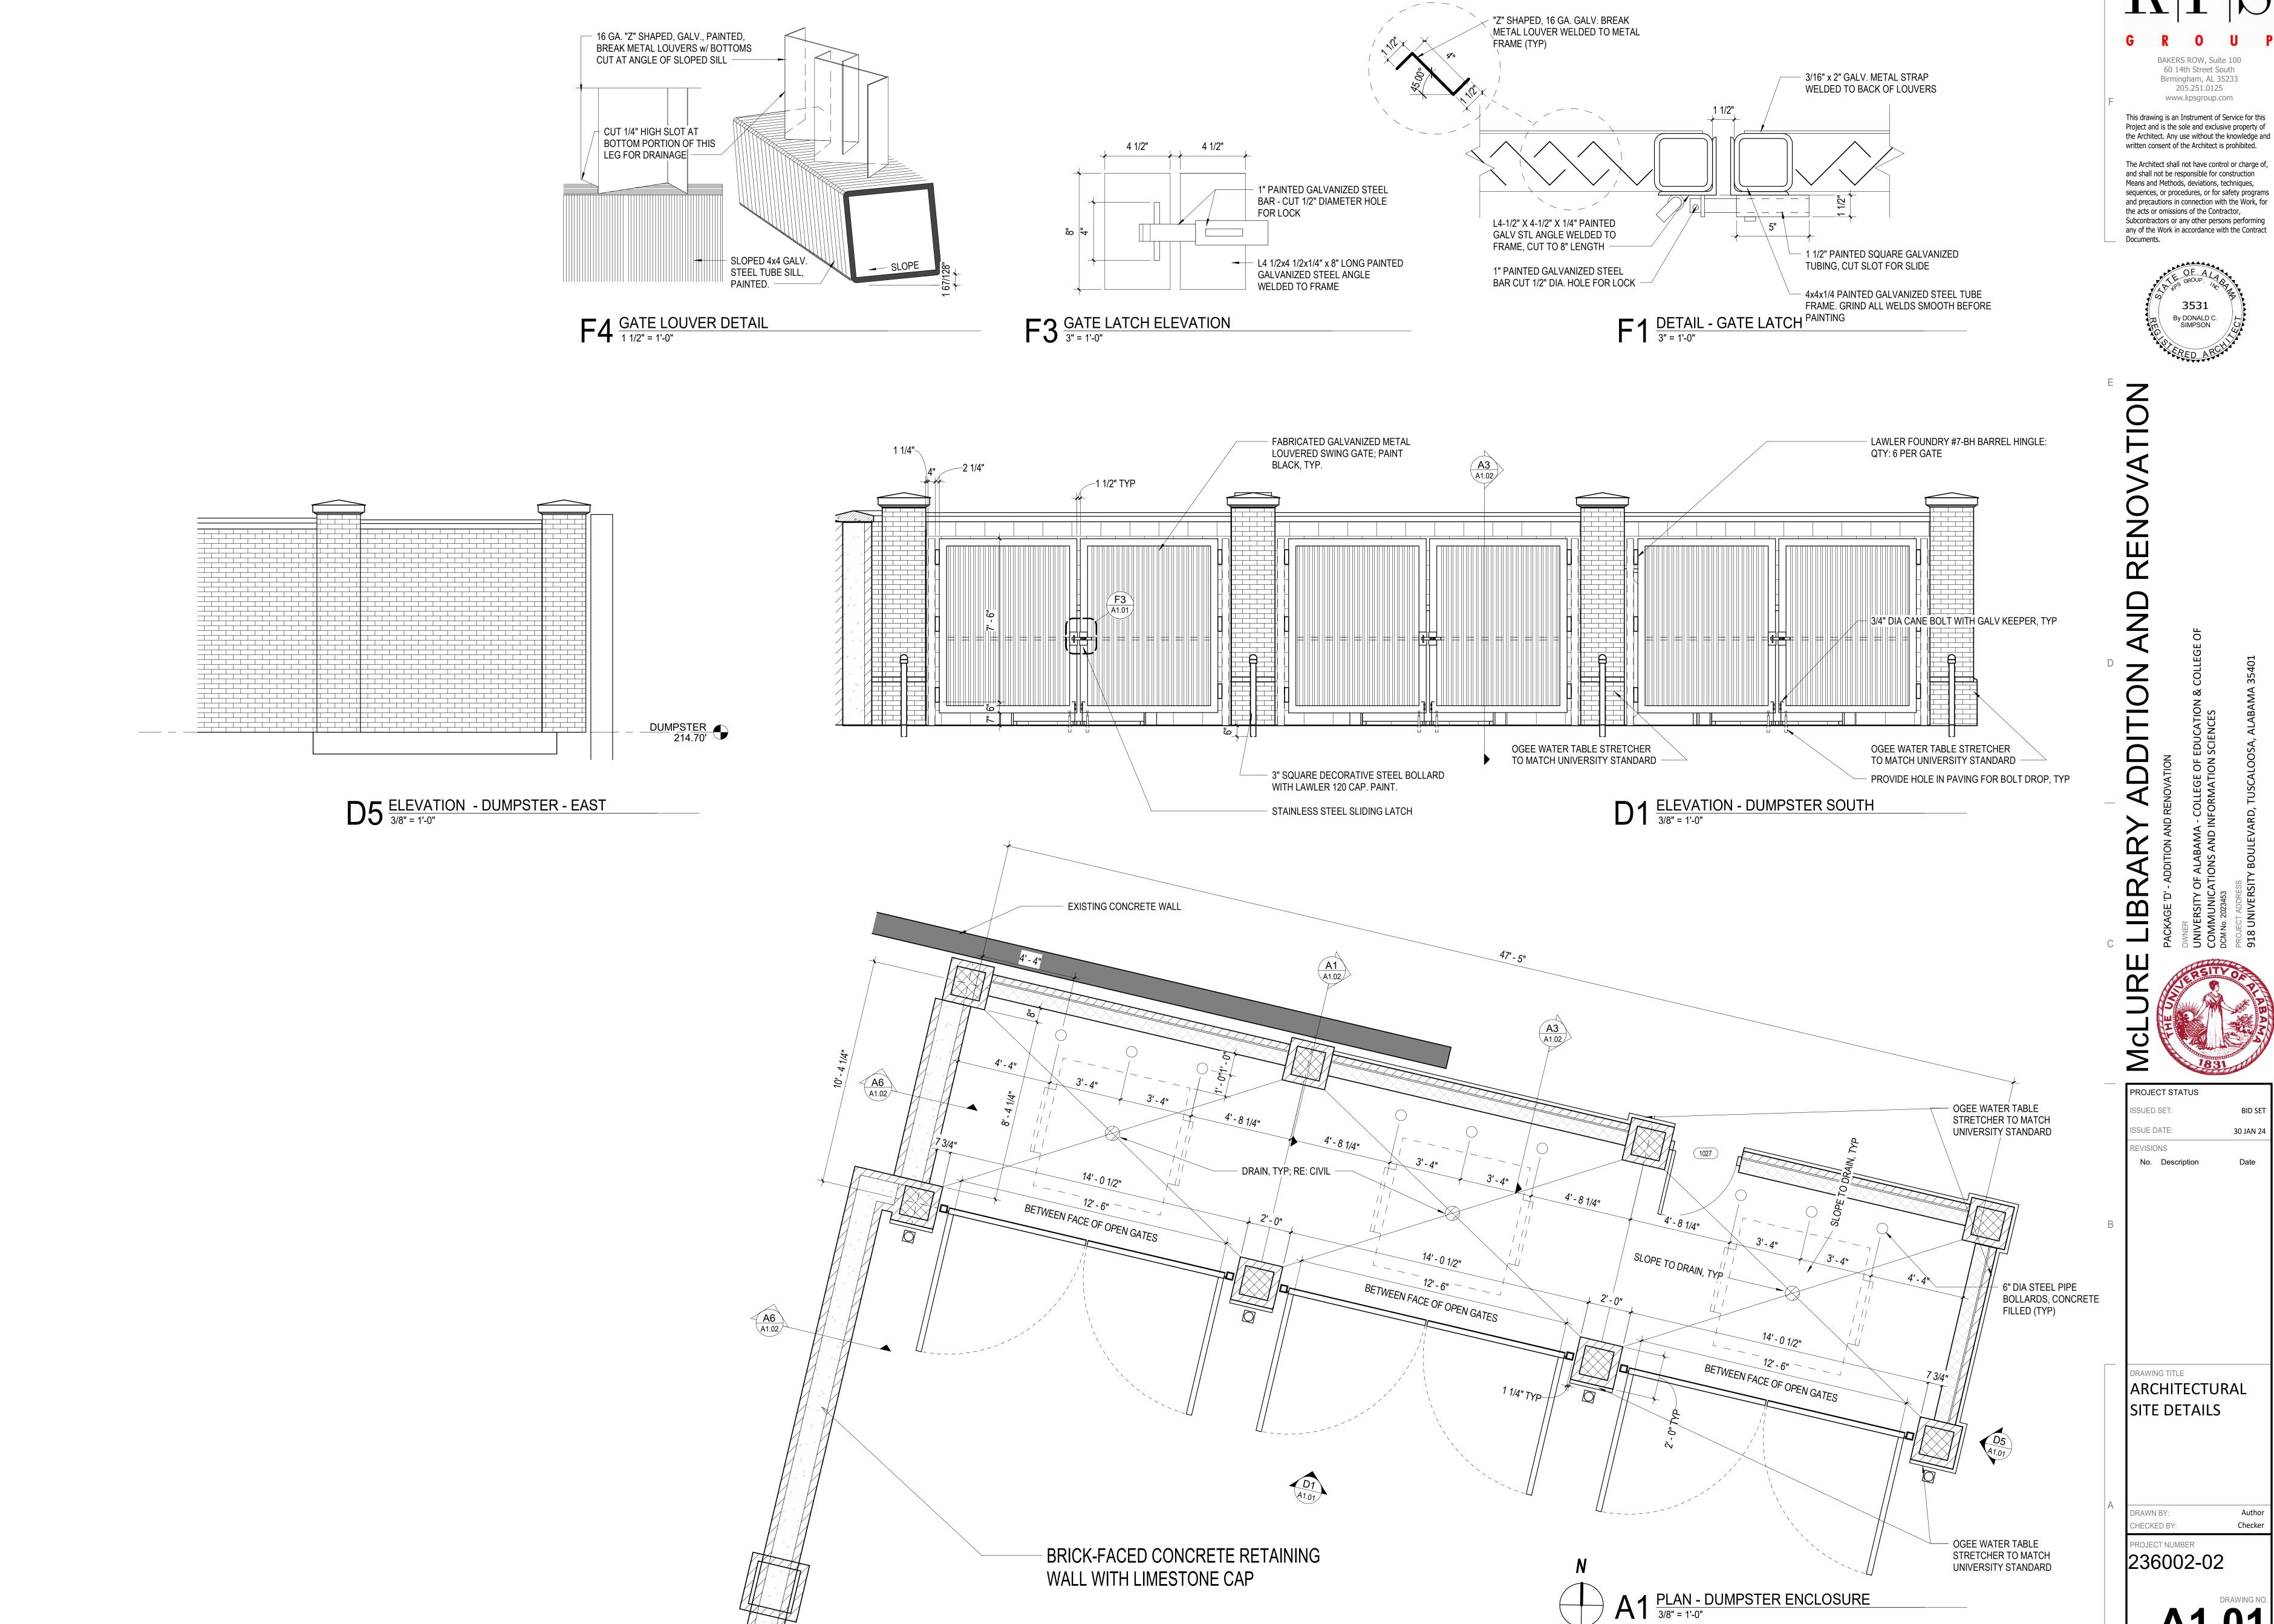

A1.01

2' - 0"

SEALANT AND BACKER ROD —

0' - 0 3/4"

2 5/8"

DRIP EDGE

MASONRY

STANDARD

5#5 CONT TOP AND BOTTOM —

5' - 0"

 $A1 \frac{\text{SECTION - DUMPSTER ENCLOSURE PIER}}{1 \frac{1}{2} = 1 \cdot 0}$

ARCHITECTURAL


SITE DETAILS

PROJECT NUMBER 236002-02


SEALANT AND BACKER LIMESTONE COPING W/ DRIP EDGE FACE BRICK STAINLESS STEEL THRU-FINISH GRADE, RE: CIVIL WALL FLASHING WITH HEMMED EDGE BRICK LEDGE - COORD WITH GRADES COPING ATTACHMENT BY STONE FABRICATOR - MASONRY ANCHOR FACE BRICK DRAINABLE FILL CONCRETE RETAINING WALL, RE: STRUCTURAL FOR REINFORCEMENT 1' - 0" OGEE WATER TABLE STRETCHER BRICK TO MATCH UNIVERSITY STANDARD - GROUT CAVITY SOLID - EXPANSION JOINT 4 4 4 4 4 — PAVEMENT; RE: CIVIL 4 4 4 4 DUMPSTER 214.70' FOUNDATION DRAIN -FOOTING; RE: STRUCTURAL FOR

A6 SECTION - RETAINING WALL AT DUMPSTERS 1 1/2" = 1'-0"

REINFORCEMENT

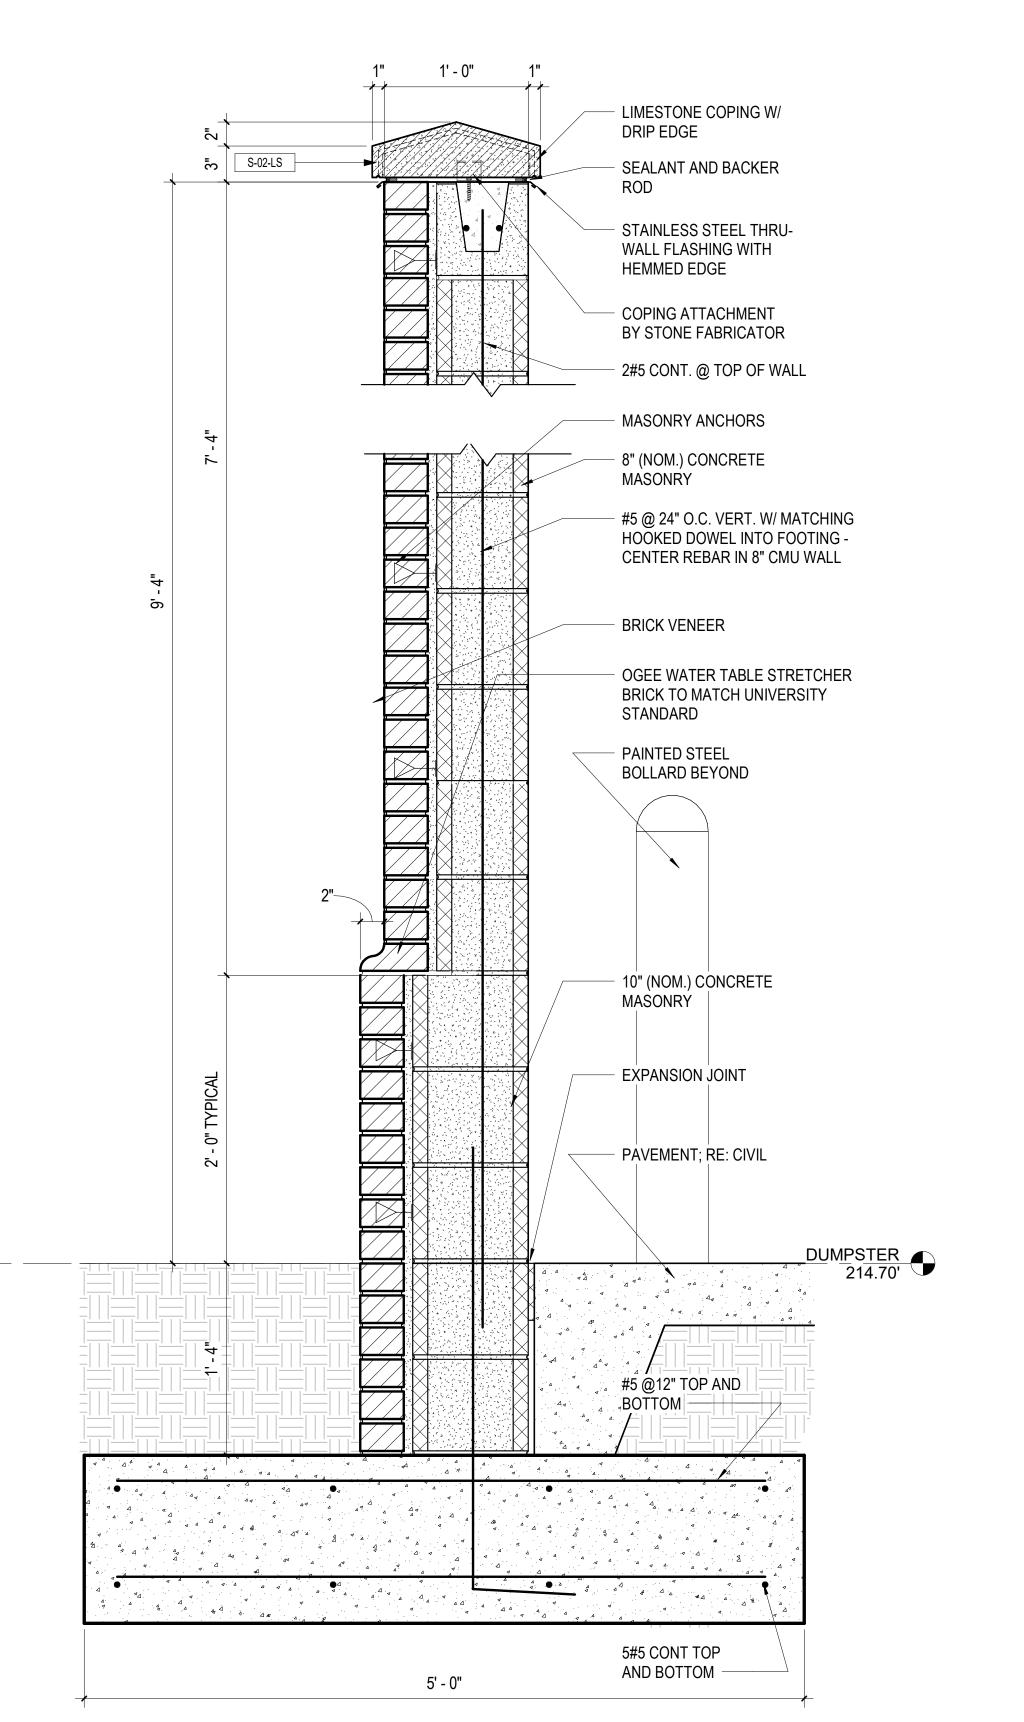

 $A3 = \frac{\text{SECTION - DUMPSTER ENCLOSURE WALL}}{1 \cdot 1/2" = 1'-0"}$

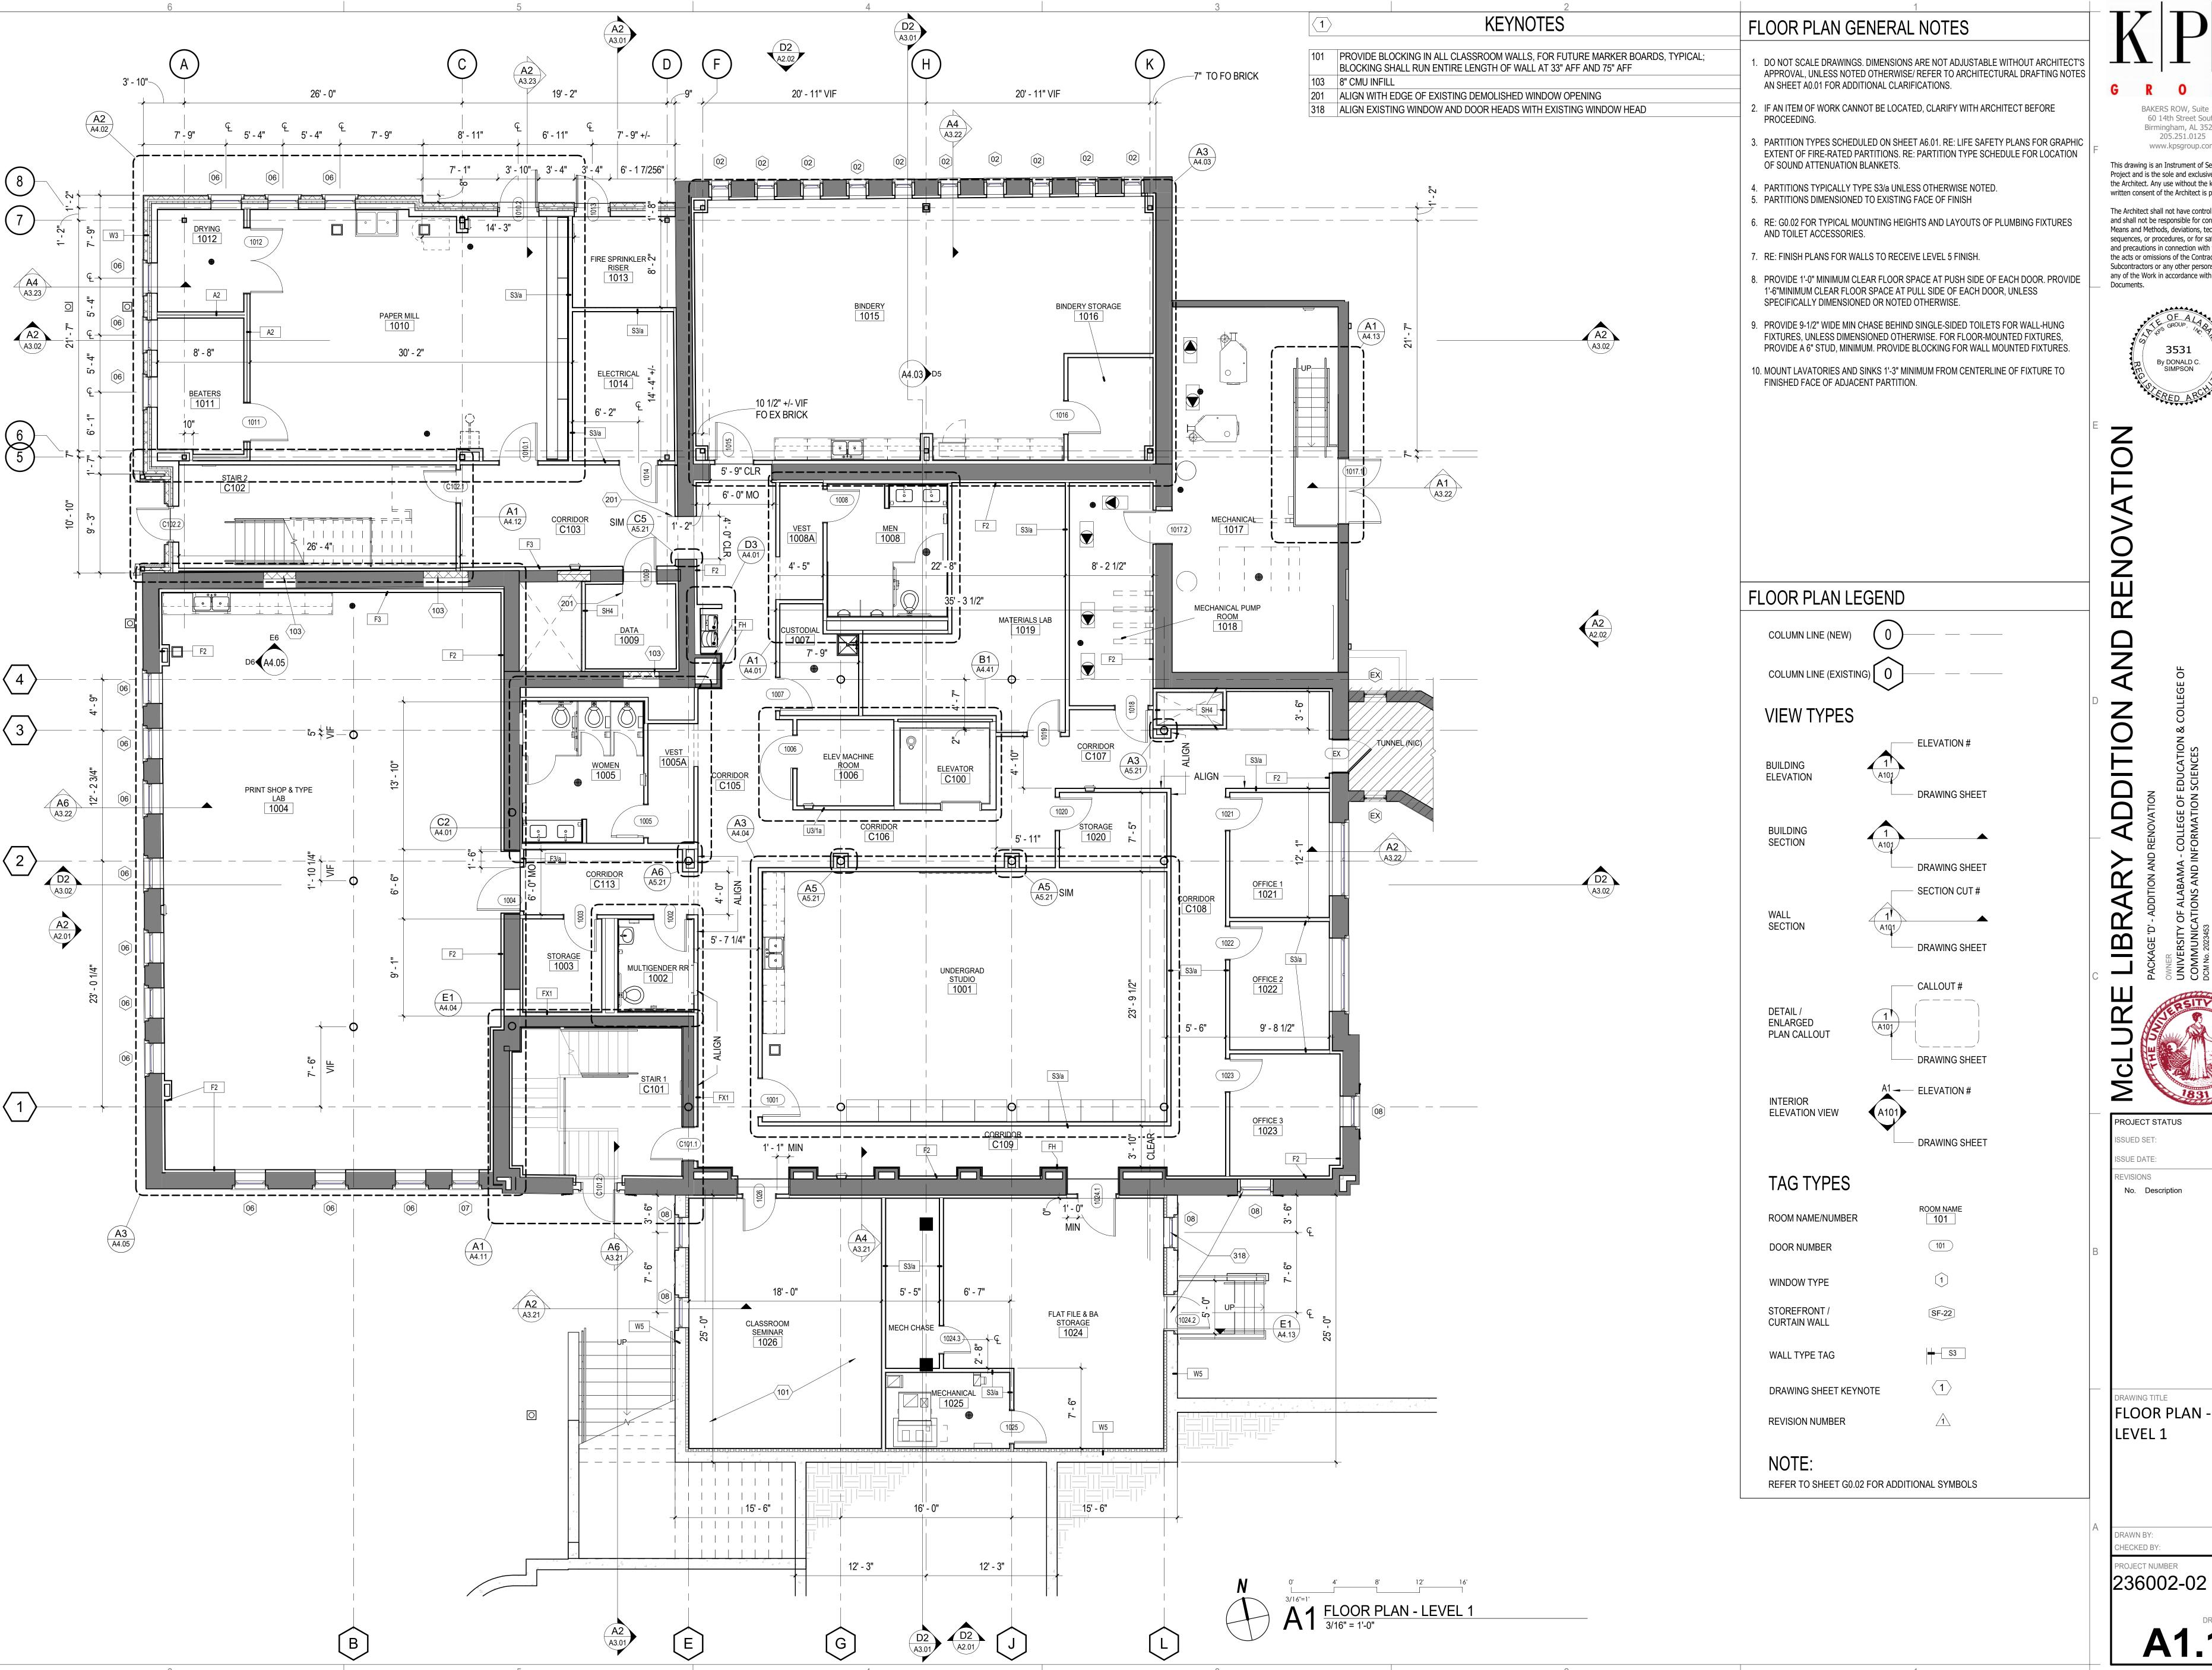


BAKERS ROW, Suite 100 60 14th Street South

Birmingham, AL 35233 205.251.0125 www.kpsgroup.com


This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



PROJECT STATUS No. Description FLOOR PLAN -


HECKED BY: ROJECT NUMBER

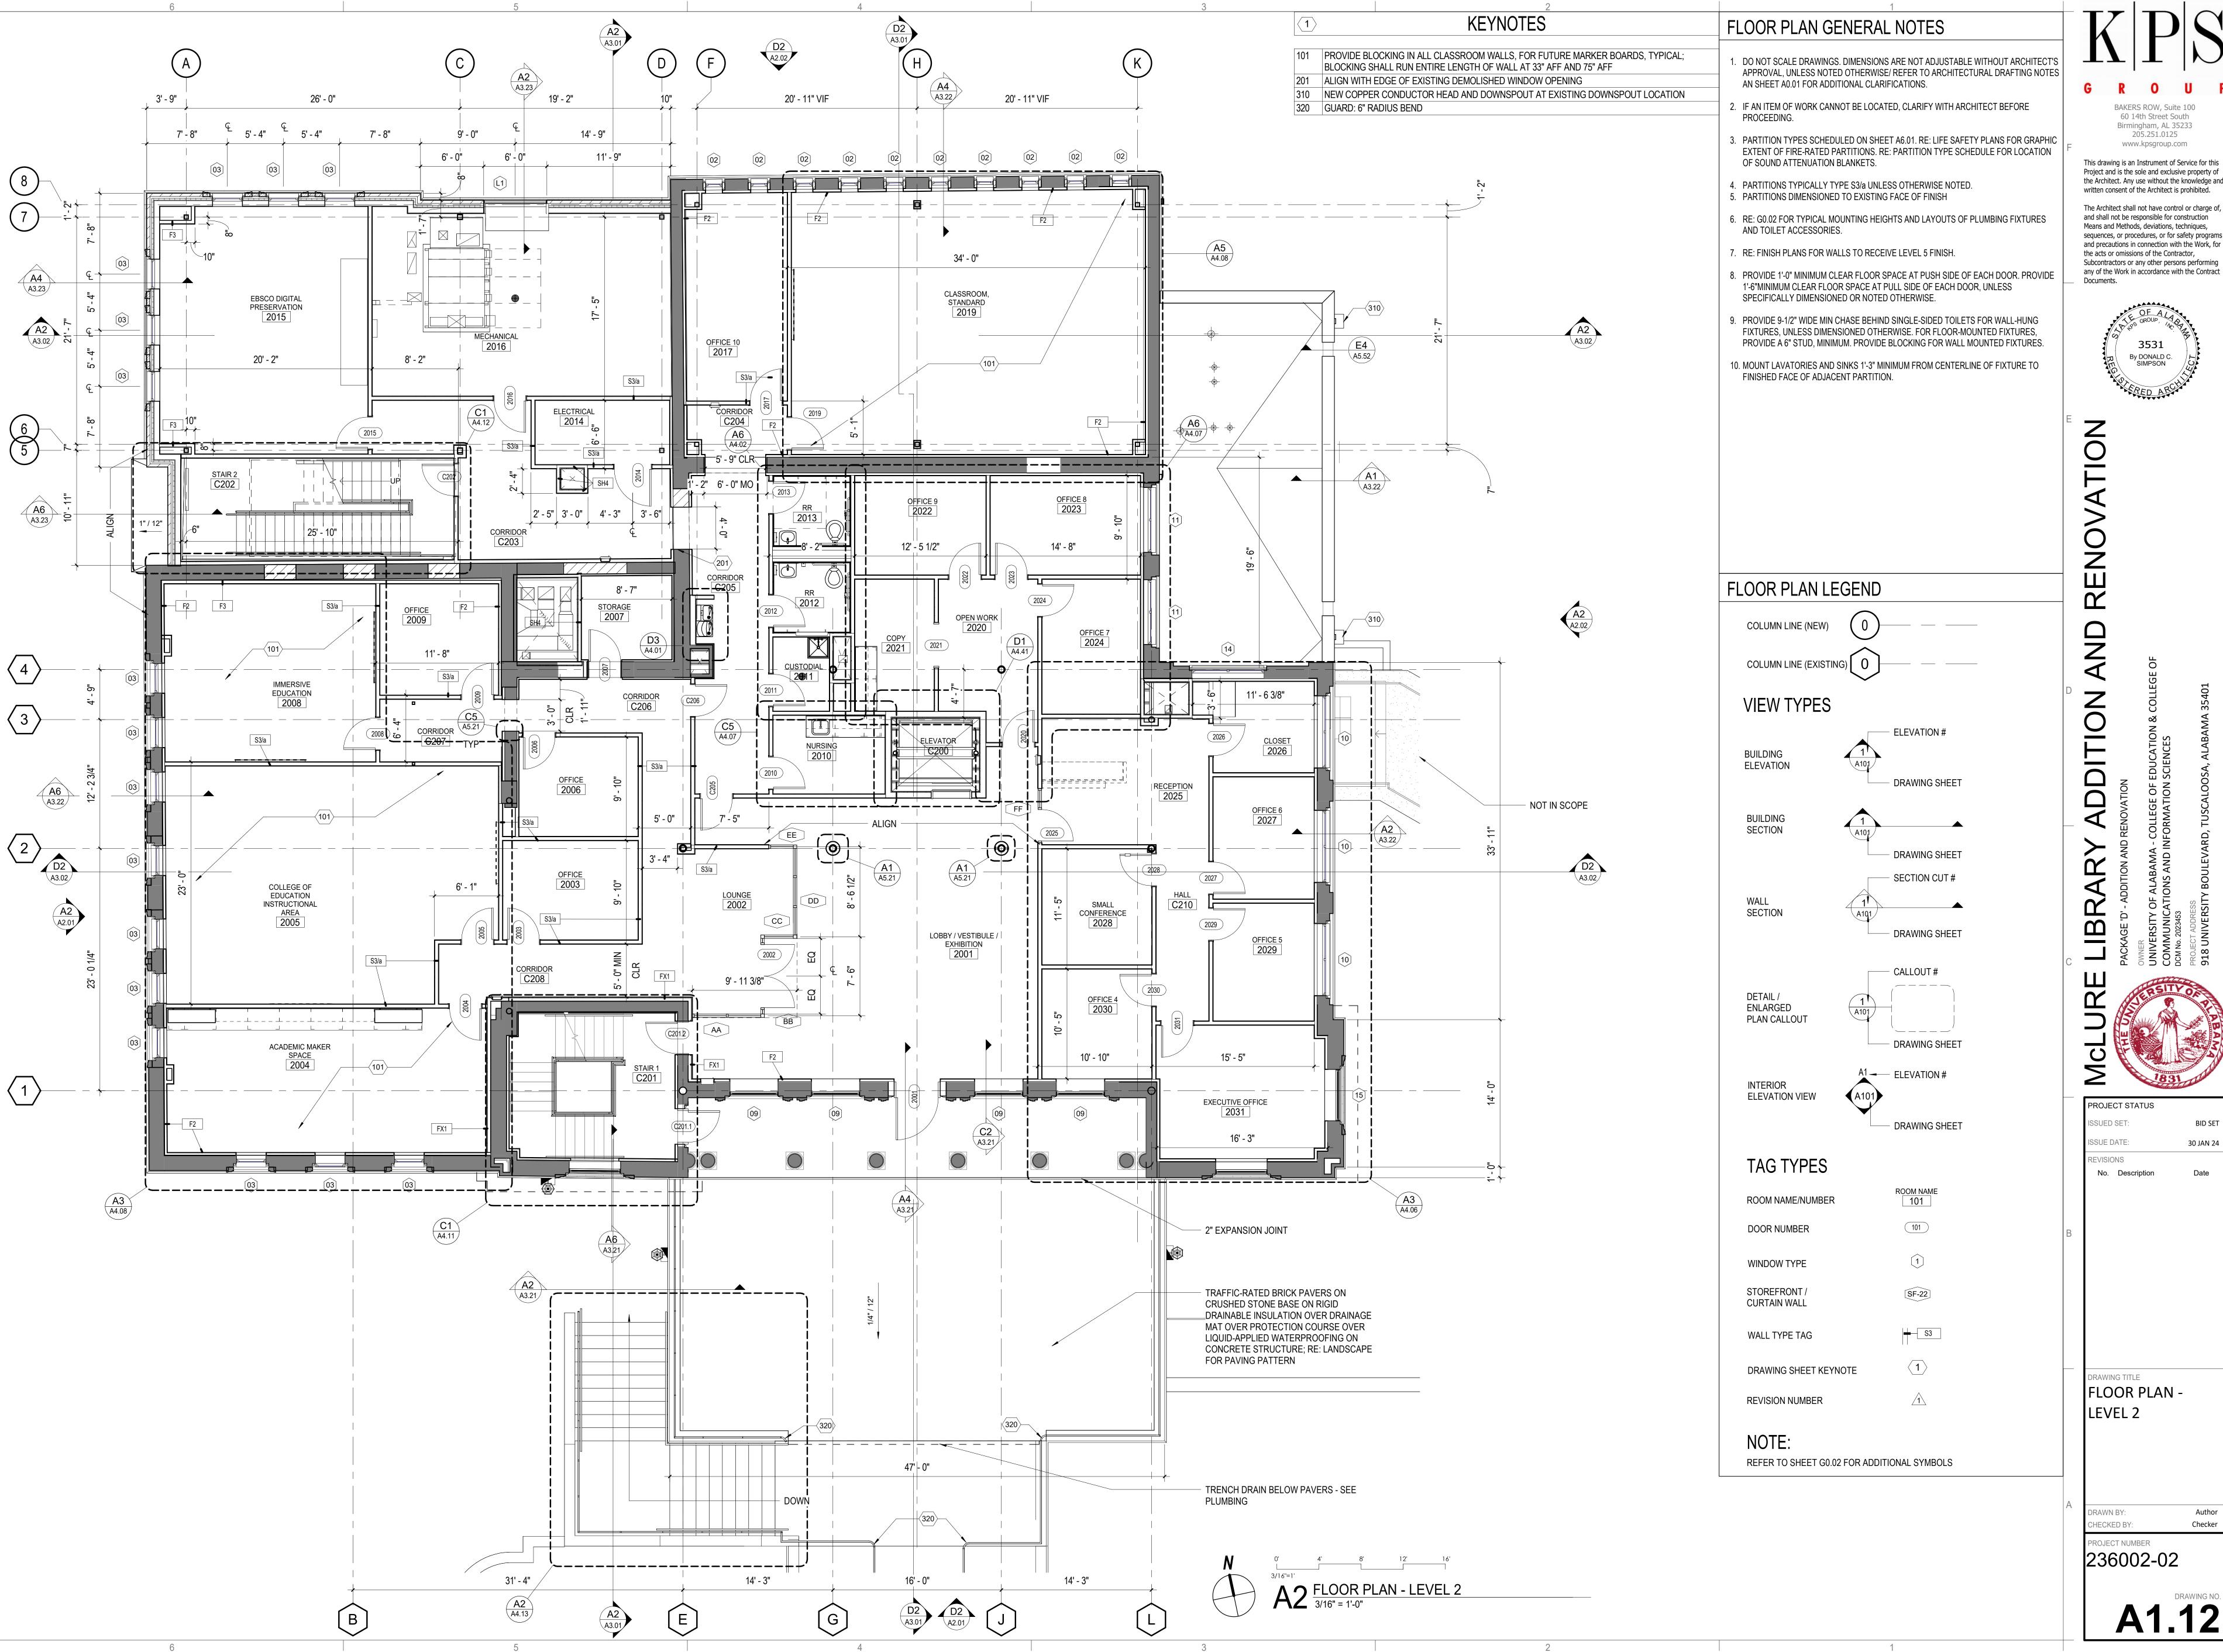

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and


The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing



30 JAN 24

FLOOR PLAN -

236002-02

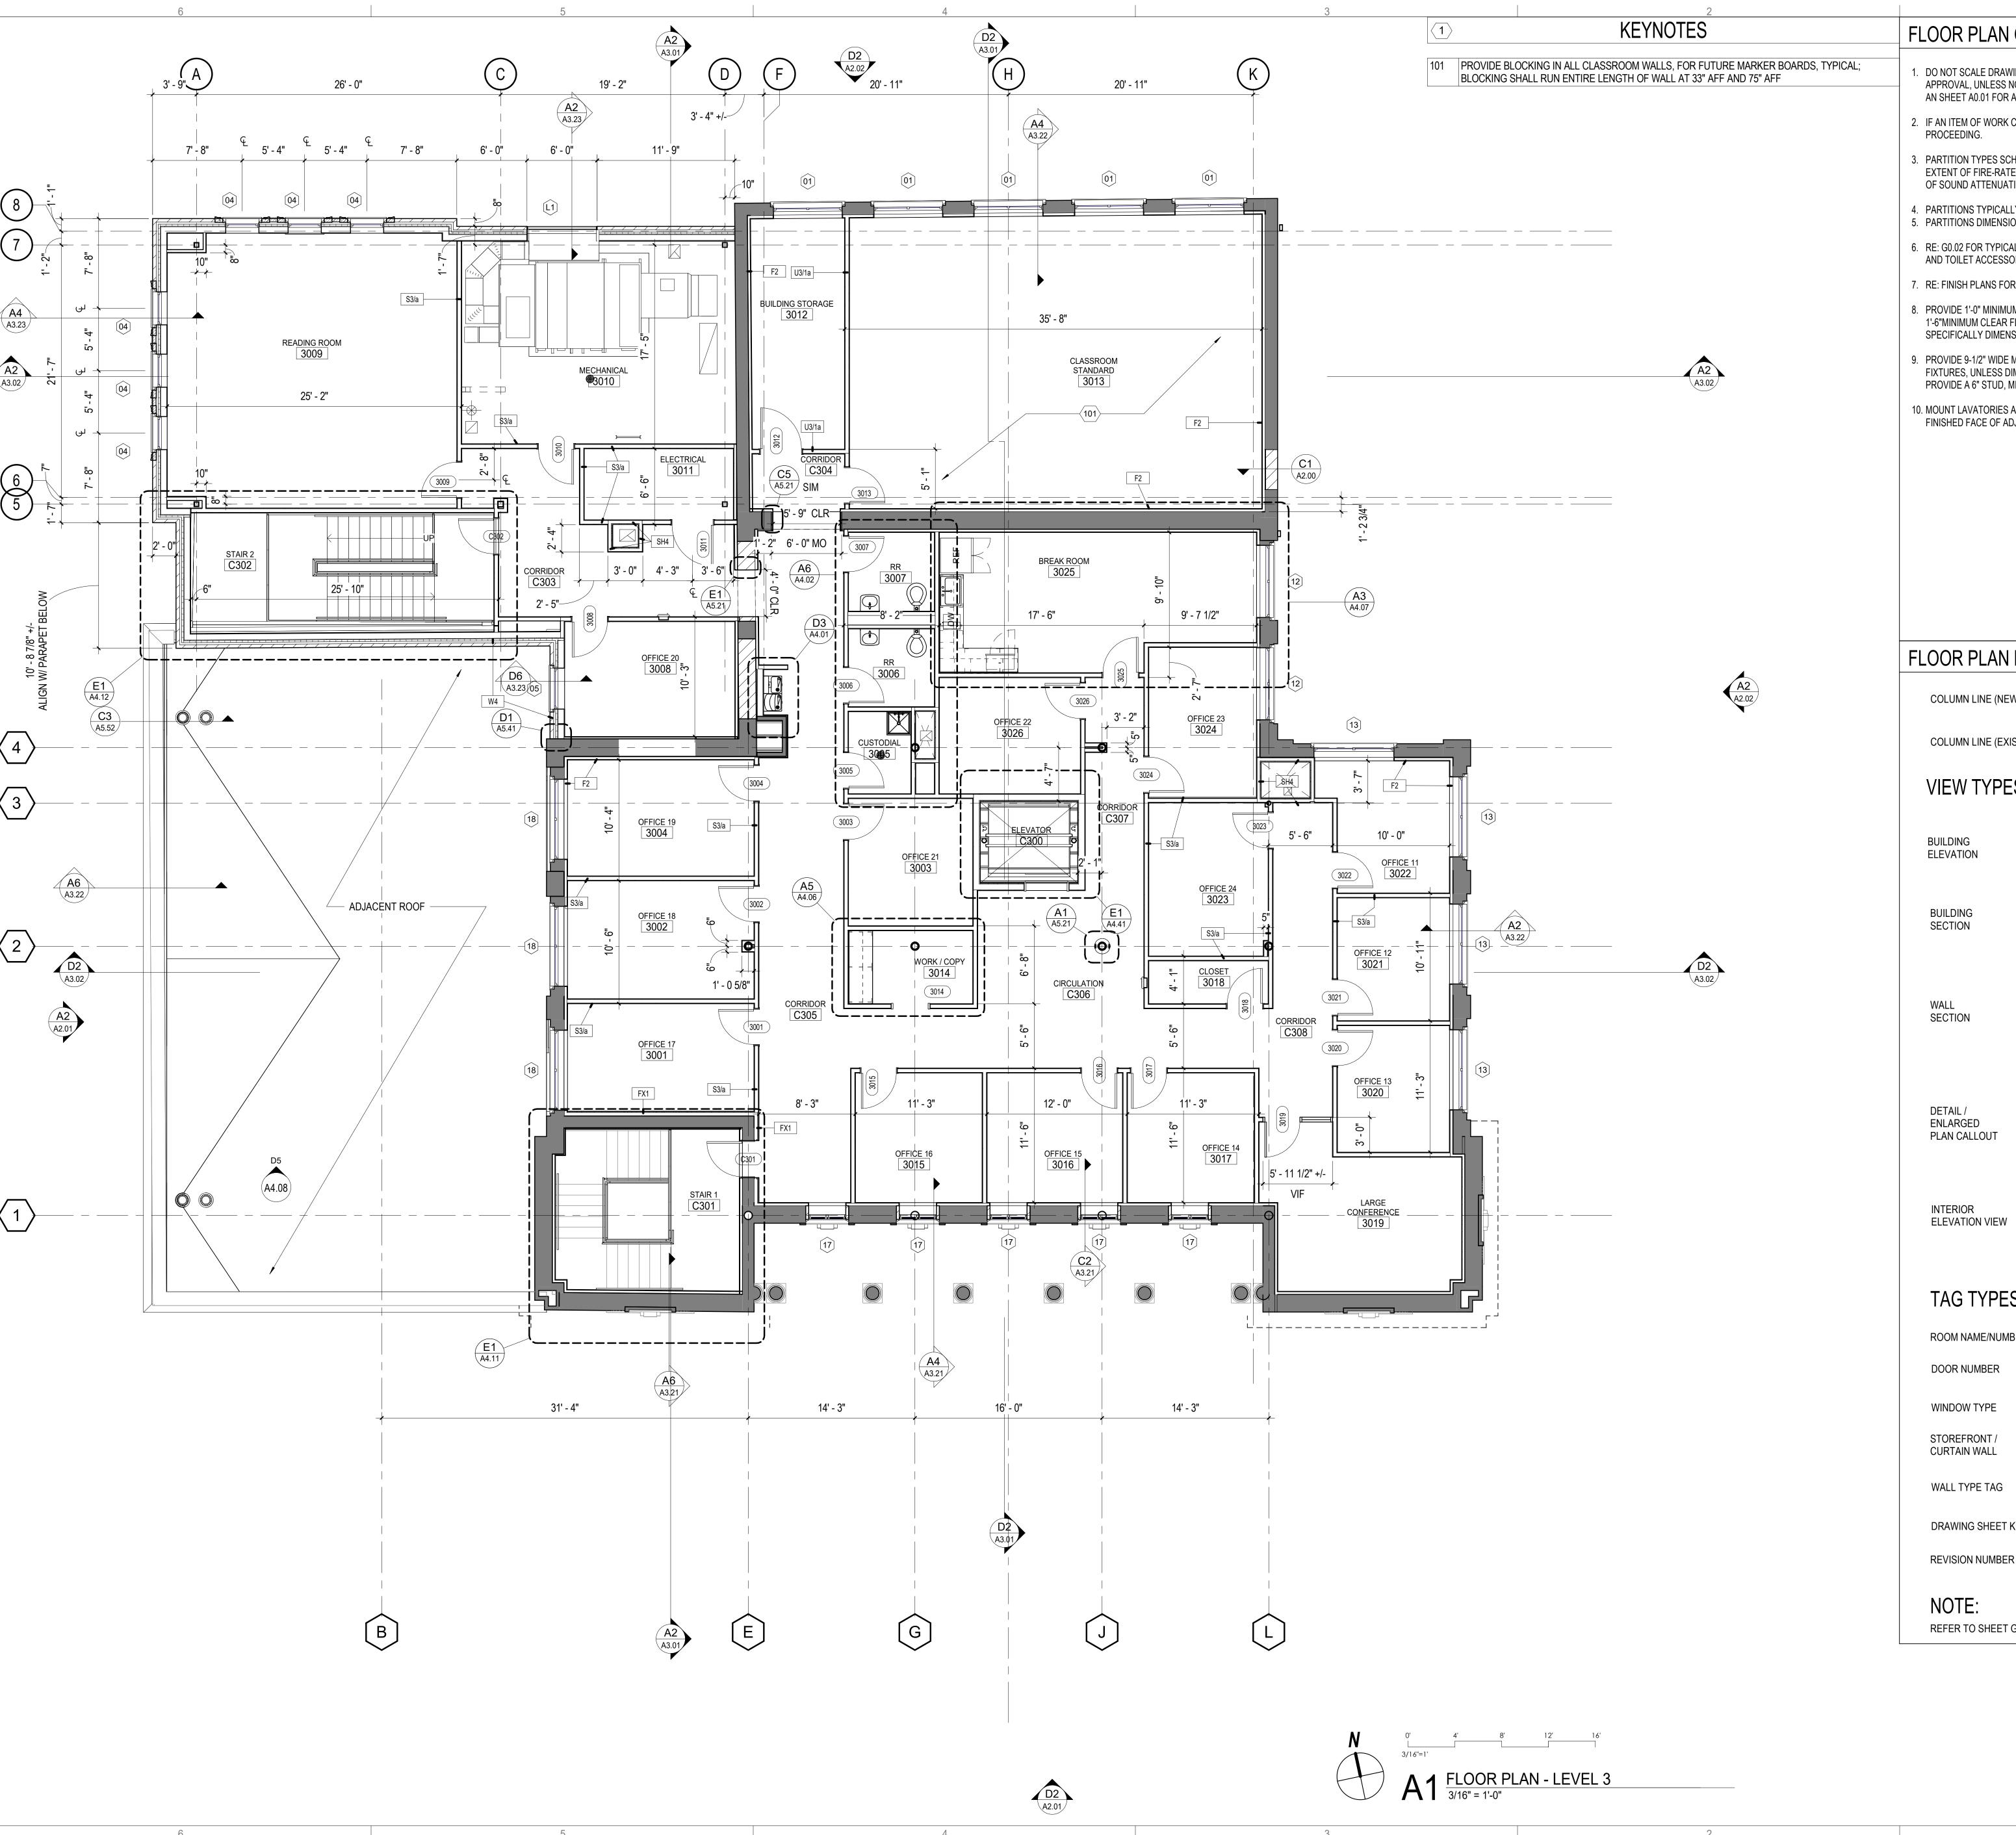

FLOOR PLAN GENERAL NOTES

. DO NOT SCALE DRAWINGS. DIMENSIONS ARE NOT ADJUSTABLE WITHOUT ARCHITECT'S APPROVAL, UNLESS NOTED OTHERWISE/ REFER TO ARCHITECTURAL DRAFTING NOTES AN SHEET A0.01 FOR ADDITIONAL CLARIFICATIONS.

2. IF AN ITEM OF WORK CANNOT BE LOCATED, CLARIFY WITH ARCHITECT BEFORE

PARTITION TYPES SCHEDULED ON SHEET A6.01. RE: LIFE SAFETY PLANS FOR GRAPHIC EXTENT OF FIRE-RATED PARTITIONS. RE: PARTITION TYPE SCHEDULE FOR LOCATION

OF SOUND ATTENUATION BLANKETS.

4. PARTITIONS TYPICALLY TYPE S3/a UNLESS OTHERWISE NOTED. 5. PARTITIONS DIMENSIONED TO EXISTING FACE OF FINISH

6. RE: G0.02 FOR TYPICAL MOUNTING HEIGHTS AND LAYOUTS OF PLUMBING FIXTURES AND TOILET ACCESSORIES.

7. RE: FINISH PLANS FOR WALLS TO RECEIVE LEVEL 5 FINISH.

8. PROVIDE 1'-0" MINIMUM CLEAR FLOOR SPACE AT PUSH SIDE OF EACH DOOR. PROVIDE 1'-6"MINIMUM CLEAR FLOOR SPACE AT PULL SIDE OF EACH DOOR, UNLESS SPECIFICALLY DIMENSIONED OR NOTED OTHERWISE.

PROVIDE 9-1/2" WIDE MIN CHASE BEHIND SINGLE-SIDED TOILETS FOR WALL-HUNG FIXTURES, UNLESS DIMENSIONED OTHERWISE. FOR FLOOR-MOUNTED FIXTURES, PROVIDE A 6" STUD, MINIMUM. PROVIDE BLOCKING FOR WALL MOUNTED FIXTURES


10. MOUNT LAVATORIES AND SINKS 1'-3" MINIMUM FROM CENTERLINE OF FIXTURE TO FINISHED FACE OF ADJACENT PARTITION.

3531 By DONALD C. SIMPSON

FLOOR PLAN LEGEND


COLUMN LINE (NEW) COLUMN LINE (EXISTING)

VIEW TYPES

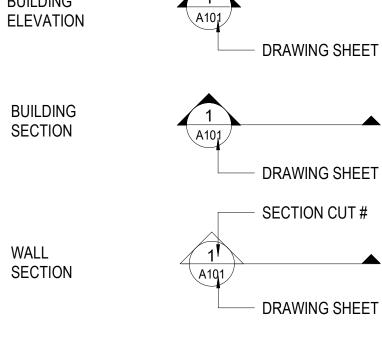

CALLOUT#

ENLARGED PLAN CALLOUT

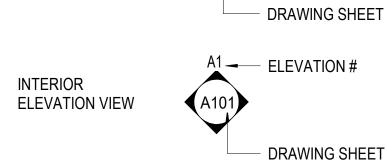

TAG TYPES	
ROOM NAME/NUMBER	ROOM NAME
DOOR NUMBER	101
WINDOW TYPE	
STOREFRONT / CURTAIN WALL	SF-22
WALL TYPE TAG	→ S3
DRAWING SHEET KEYNOTE	1


REFER TO SHEET G0.02 FOR ADDITIONAL SYMBOLS

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233

205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited. The Architect shall not have control or charge of,


and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



PROJECT STATUS SSUED SET: ISSUE DATE: REVISIONS No. Description

FLOOR PLAN -LEVEL 3


236002-02

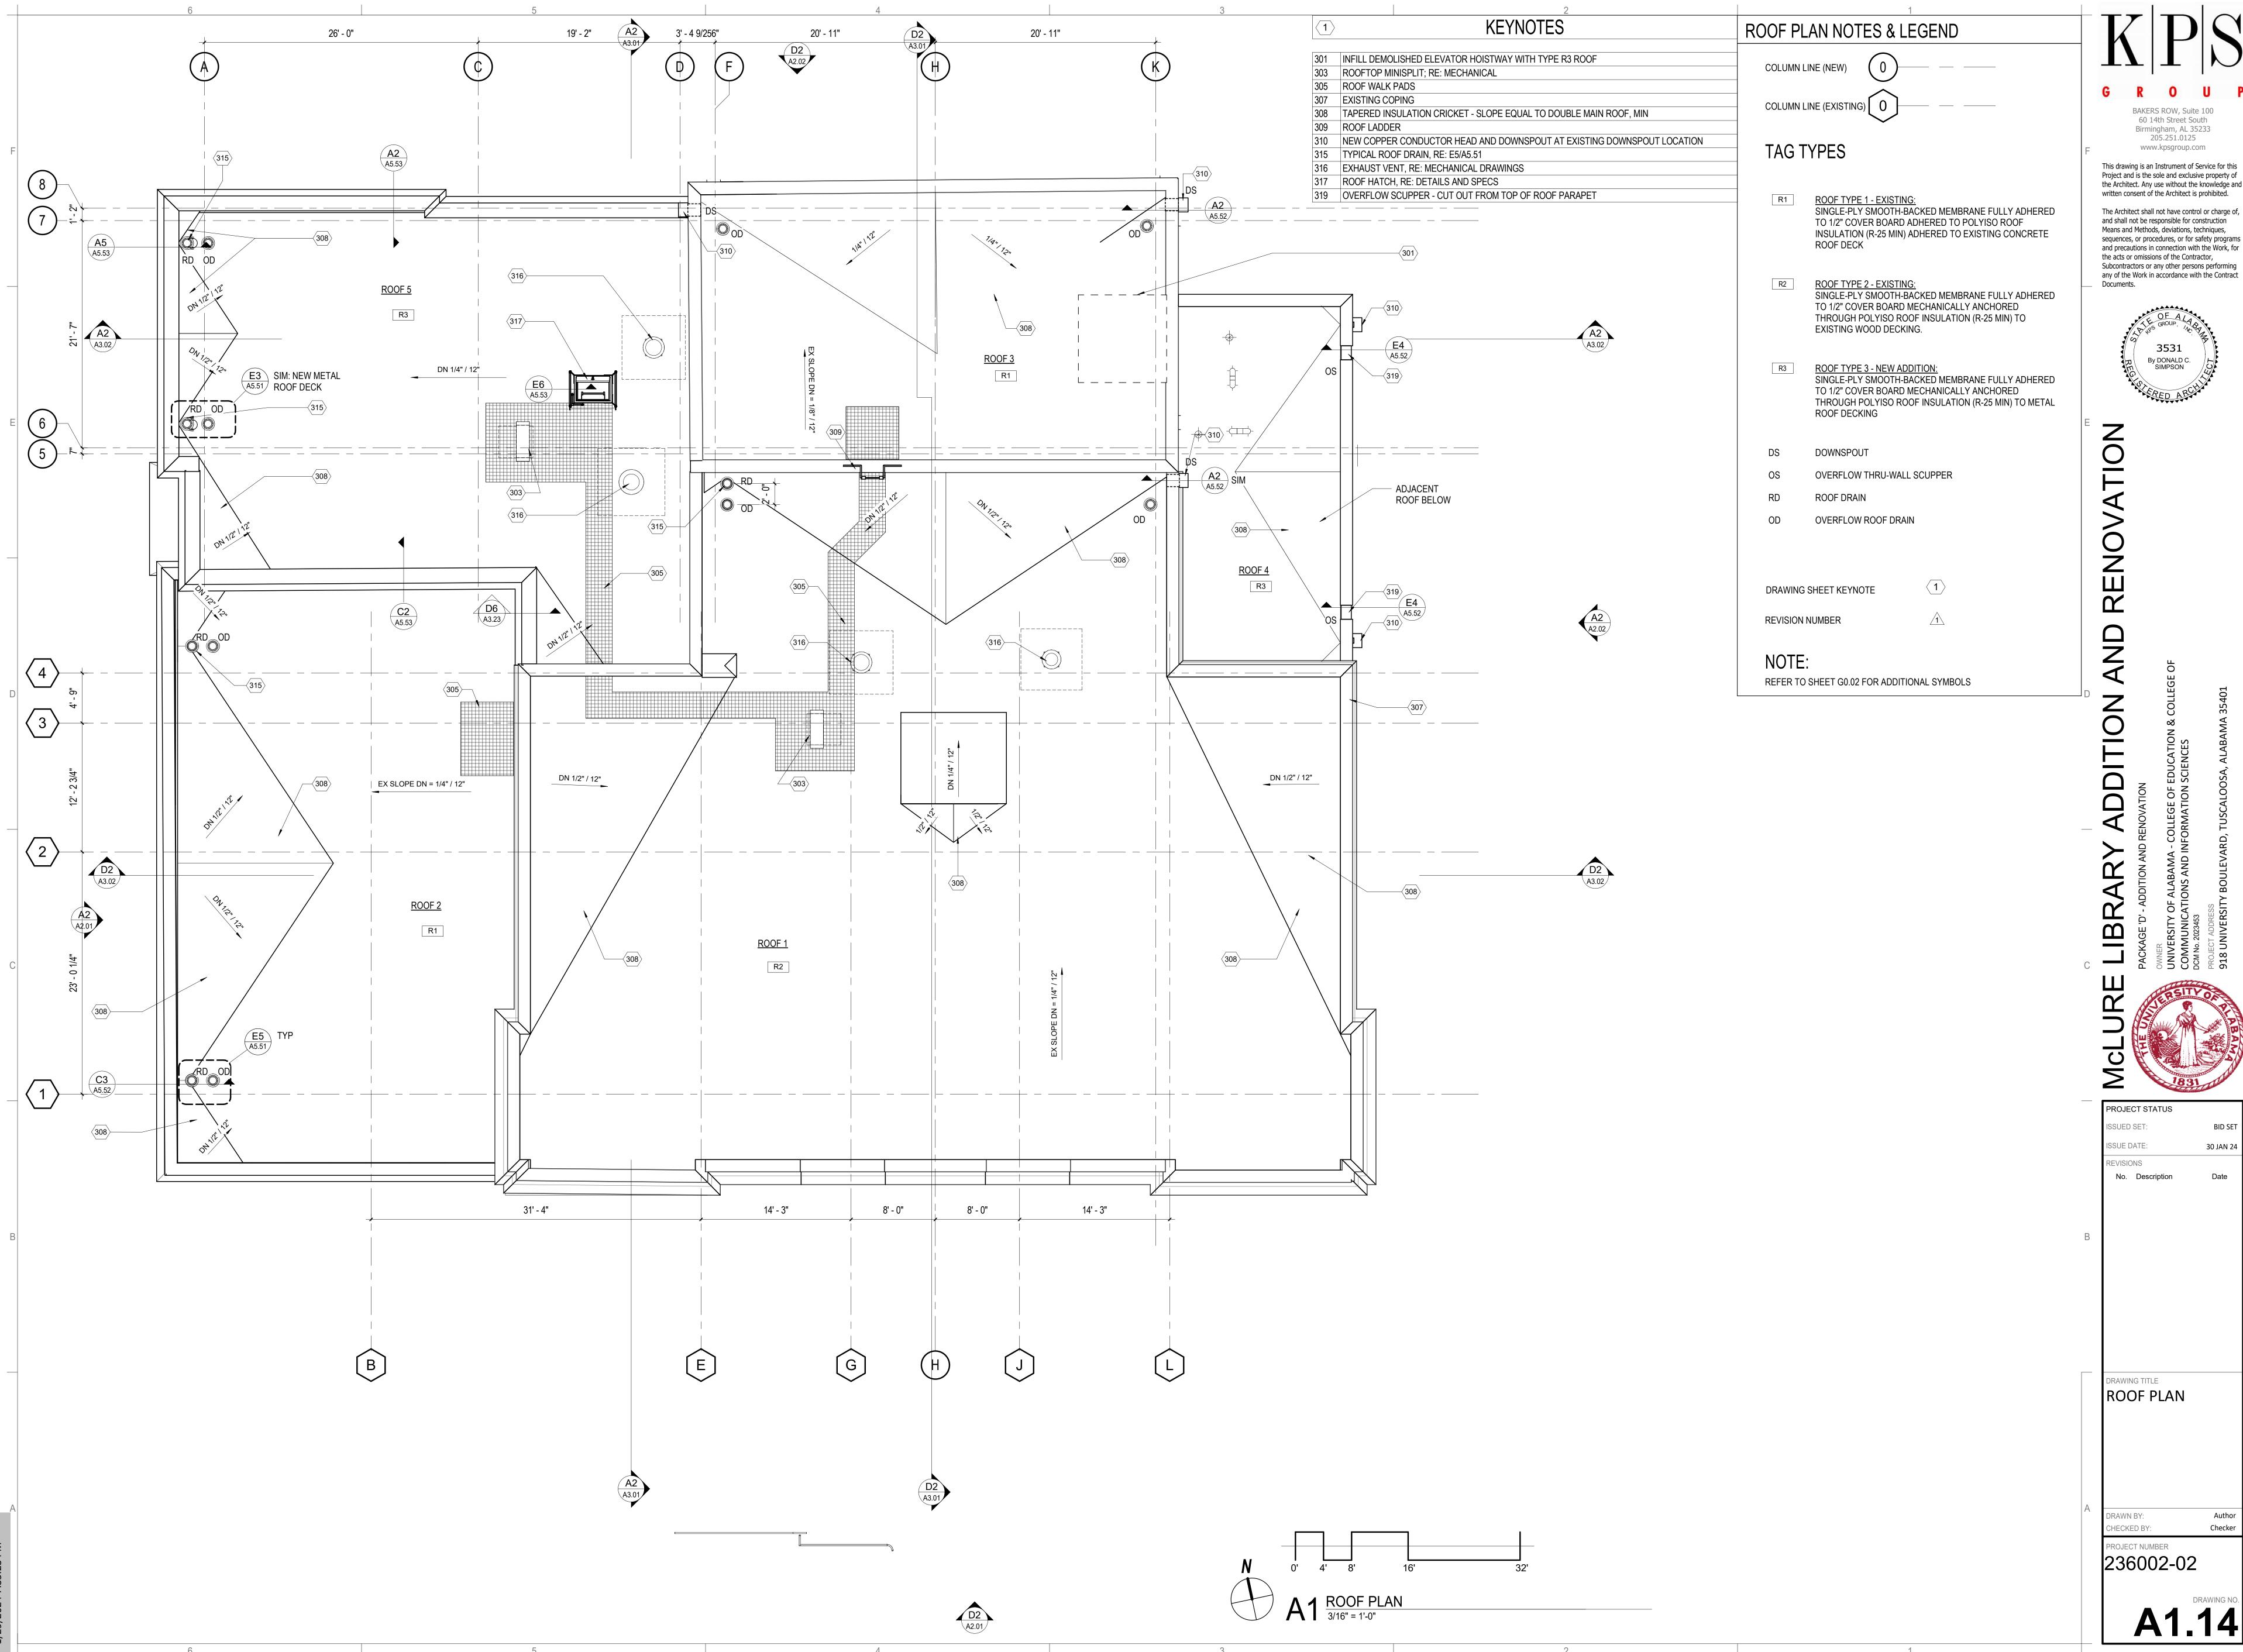

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing



ROOF PLAN



KPS

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



NOLANON

ARY ADDITION AND INTION AND INTION AND RENOVATION
ALABAMA - COLLEGE OF EDUCATION & COLLEGE OF

PACF OWNE UNIV COM DCM N PROJE 918 I

PROJECT STATUS

ISSUED SET: BID SET

ISSUE DATE: 30 JAN 24

REVISIONS

No. Description Date

DRAWING TITLE
REFLECTED CEILING

PLAN - LEVEL 1

DRAWN BY:
CHECKED BY:

PROJECT NUMBER 236002-02

A1.21

REFLECTED CEILING PLAN GENERAL NOTES

KEYNOTES

1. COMPARE THIS REFLECTED CEILING PLAN WITH ELECTRICAL LIGHTING PLANS, MECHANICAL SUPPLY, RETURN, AND EXHAUST PLANS. THE CONTRACTOR SHALL REPORT ANY OMISSIONS OR INCONSISTENCIES TO THE ARCHITECT.

2. CEILING ELEVATION @ +9'-0" AFF, TYPICAL, UNLESS NOTED OTHERWISE.

AND OBTAIN CLARIFICATION BEFORE PROCEEDING.

3. FOR FURTHER DIMENSIONS SEE LARGE SCALE PLANS, SECTIONS, ELEVATIONS, AND DETAILS.

RE: ELECTRICAL DRAWINGS FOR THE LOCATIONS OF CEILING MOUNTED SMOKE DETECTORS, SPEAKERS, EXIT SIGNAGE, FIRE ALARM DEVICES, WALL MOUNTED

EXIT LIGHTS, ETC.

5. FIXTURES SHOWN FOR LOCATION ONLY, REFER TO ENGINEERING DWGS FOR COMPLETE SCOPE, TYPE, AND ANY ADDITIONAL SYSTEM REQUIREMENTS. NOTIFY ARCHITECT OF ANY DISCREPANCIES BETWEEN ENGINEERING DWGS AND THIS PLAN

6. COORDINATE WITH ARCHITECT THE EXACT LOCATION OF EQUIPMENT ACCESS PANELS IN GYPSUM WALL BOARD CEILING BEFORE INSTALLATION.

7. VERIFY THAT ACCESS PANELS OF TYPE SPECIFIED ARE INSTALLED IN NON-ACCESSIBLE TYPE CEILINGS WHERE SERVICE OR ADJUSTMENT TO MECHANICAL, PLUMBING, OR ELECTRICAL ITEMS MAY BE REQUIRED. ACCESS PANELS SHALL BE THE FIRE RATED TYPE EQUAL TO THE RATING OF THE CEILING IN WHICH THEY OCCUR.

8. SPRINKLER HEAD LOCATIONS ARE NOT SHOWN ON ARCHITECTURAL REFLECTED CEILING PLANS. (BUILDING IS TO BE "FULLY SPRINKLERED") PER NFPA 13 AND OWNER'S INSURANCE COMPANY'S REQUIREMENTS. RE: FIRE PROTECTION PLANS FOR ADDITIONAL INFORMATION.

9. 18" MINIMUM VERTICAL CLEARANCE SHALL BE MAINTAINED BETWEEN THE BOTTOM OF EXTENDED SPRINKLER HEADS AND THE TOP OF FILES, SHELVING, LOCKERS, ETC., TYPICAL, UNLESS NOTED OTHERWISE.

10. VERIFY WITH ARCHITECT LOCATION OF VISIBLE CEILING ELEMENTS NOT SHOWN ON ARCHITECTURAL DRAWINGS PRIOR TO INSTALLATION. COORDINATE WITH OTHER DRAWINGS FOR CEILING FIXTURES NOT SHOWN ON ARCHITECTURAL DRAWINGS, INCLUDING (BUT NOT LIMITED TO) ELECTRICAL AND MECHANICAL FIXTURES.

11. IF LOCATION DIMENSIONS ARE NOT INDICATED, FINAL POSITION OF ANY/ALL EXPOSED ELEMENTS SHALL BE COORDINATED WITH ARCHITECT.

12. LAY DIRECTIONAL PATTERN CEILING PANEL OR TILE ON WAY WITH PATTERN AS INDICATED BY ARCHITECT, TYPICAL, U.N.O.

13. INSTALL SIGHT BAFFLES AT RETURN AIR SLOTS. PAINT ANY NEW AREA OR ITEM ABOVE THE CEILING VISIBLE FROM THE ROOM SIDE, INCLUDING DUCTWORK, NON-SPECULAR BLACK, TYPICAL, U.N.O.

14. CEILING SUPPORT SYSTEMS ARE NOT DESIGNED OR INTENDED TO SUPPORT THE WEIGHT OF ADDITIONAL EQUIPMENT, CABLE, CONDUIT, LIGHTS, MECHANICAL EQUIPMENT OR OTHER CONSTRUCTION. SUPPORT THESE ITEMS INDEPENDENTLY FROM THE STRUCTURE ABOVE.

15. DO NOT HANG (SUPPORT) ANY ITEMS FROM METAL ROOF DECK. SUSPEND CEILING HANGERS FROM BUILDING'S STRUCTURAL MEMBERS, PLUMB AND FREE FROM CONTACT WITH INSULATION OR OTHER OBJECTS WITHIN CEILING PLENUM. SPLAY HANGERS ONLY WHERE REQUIRED TO MISS OBSTRUCTIONS; OFFSET RESULTING HORIZONTAL FORCES BY BRACING, COUNTER-SPLAYING, OR OTHER EQUALLY EFFECTIVE MEANS. WHERE WIDTH OF DUCTS AND OTHER CONSTRUCTION WITHIN CEILING PLENUM PRODUCES HANGER SPACING THAT INTERFERE WITH LOCATION OF HANGERS, USE TRAPEZES OR EQUIVALENT DEVICES.

16. EACH FIXTURE SHALL BE PROVIDED WITH SUPPORT WIRE, ATTACHED TO STRUCTURAL MEMBERS SO THAT THE FIXTURE IS SUPPORTED INDEPENDENTLY OF CEILING. INSTALL (1) SUPPORT @ EACH CORNER. FLEXIBLE CONDUIT, DUCT OR PIPING SHALL BE SUPPORTED SO THAT IT DOES NOT REST UPON CEILING OR TOUCH OTHER BUILDING SYSTEMS.

17. REFER TO THE INTERIOR FINISH SCHEDULE FOR PRODUCT INFORMATION.

18. AT EXPOSED CEILINGS, CONDUIT, DUCTWORK, AND PIPING TO BE PAINTED TO MATCH STRUCTURE, TYPICAL, UNLESS NOTED OTHERWISE.

19. G1 CEILING TO BE PAINTED _____, U.N.O. CONFIRM DISCREPANCIES WITH ARCHITECT.

20. REFER TO FLOOR PLANS FOR TV LOCATIONS.

21. PENETRATIONS OF NON-FIRE RATED DRYWALL ABOVE CEILING AND PENETRATIONS OF GYPSUM BOARD CEILINGS TO BE ACOUSTICALLY SEALED, TYPICAL, UNLESS NOTED OTHERWISE.

REFLECTED CEILING PLAN LEGEND

ELEVATION ABOVE FINISHED FLOOR

CEILING TYPE TA 30'-00" A1 CEILING TYPE

SUSPENDED ACOUSTICAL TILE CEILING. REFER TO CEILING TYPE SCHEDULE

DIRECT-ATTACHED ACOUSTICAL CEILING. LOCATE BETWEEN BAR JOISTS.

GYPSUM BOARD CEILING. REFER TO CEILING TYPE SCHEDULE

EXPOSED STRUCTURE. PAINT DECK, CONDUIT, DUCTWORK, AND PIPING TO MATCH STRUCTURE, TYPICAL, UNLESS NOTED OTHERWISE

CEILING LIGHT FIXTURE, RECESSED 24" x 48".

RE: ELECTRICAL FOR TYPE

CEILING LIGHT FIXTURE, RECESSED, 24" x 24", RE: ELECTRICAL FOR TYPE

CEILING LIGHT LINEAR PENDANT, RE:

ELECTRICAL FOR TYPE

CEILING LIGHT, RECESSED, ROUND, RE: ELECTRICAL FOR TYPE

WALL-MOUNTED STRIP LIGHT FIXTURE, RE: ELECTRICAL

CEILING LINEAR SURFACE MOUNTED, RE: ELECTRICAL FOR TYPE

CEILING SUPPLY AIR DIFFUSER, REFER TO HVAC DWGS FOR SIZE AND TYPE.

CEILING RETURN AIR GRILLE, REFER TO HVAC DWGS FOR SIZE AND TYPE.

CEILING RETURN AIR GRILLE, REFER TO HVAC DWGS FOR SIZE AND TYPE.

CEILING CLOSED-CIRCUIT TV CAMERA, DOME-STYLE

CCTVO


EXP-1

KPS

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



RENOVATION

Z

1

OF ALABAMA - COLLEGE OF EDUCATION & COLLEGE C CATIONS AND INFORMATION SCIENCES

PACKAG

OWNER

UNIVER

COMMI

DCM No. 20

PROJECT

918 UN

PROJECT STATUS

ISSUED SET:

ISSUE DATE:

REVISIONS

No. Description

Date

REFLECTED CEILING
PLAN - LEVEL 2

A DRAWN BY:
CHECKED BY:
PROJECT NUMBER

PROJECT NUMBER 236002-02

A1.22

N 0' 4' 8' 12' 16'
3/16''=1'

A 1 REFLECTED CEILING PLAN - LEVEL 2
3/16" = 1'-0"

A1 REFLECTED CEILING PLAN - LEVEL 3 3/16" = 1'-0"

REFLECTED CEILING PLAN GENERAL NOTES

COMPARE THIS REFLECTED CEILING PLAN WITH ELECTRICAL LIGHTING PLANS, MECHANICAL SUPPLY, RETURN, AND EXHAUST PLANS. THE CONTRACTOR SHALL

REPORT ANY OMISSIONS OR INCONSISTENCIES TO THE ARCHITECT.

2. CEILING ELEVATION @ +9'-0" AFF, TYPICAL, UNLESS NOTED OTHERWISE.

3. FOR FURTHER DIMENSIONS SEE LARGE SCALE PLANS, SECTIONS, ELEVATIONS, AND DETAILS.

4. RE: ELECTRICAL DRAWINGS FOR THE LOCATIONS OF CEILING MOUNTED SMOKE DETECTORS, SPEAKERS, EXIT SIGNAGE, FIRE ALARM DEVICES, WALL MOUNTED EXIT LIGHTS, ETC.

5. FIXTURES SHOWN FOR LOCATION ONLY, REFER TO ENGINEERING DWGS FOR COMPLETE SCOPE, TYPE, AND ANY ADDITIONAL SYSTEM REQUIREMENTS. NOTIFY ARCHITECT OF ANY DISCREPANCIES BETWEEN ENGINEERING DWGS AND THIS PLAN AND OBTAIN CLARIFICATION BEFORE PROCEEDING.

COORDINATE WITH ARCHITECT THE EXACT LOCATION OF EQUIPMENT ACCESS PANELS IN GYPSUM WALL BOARD CEILING BEFORE INSTALLATION.

VERIFY THAT ACCESS PANELS OF TYPE SPECIFIED ARE INSTALLED IN NON-ACCESSIBLE TYPE CEILINGS WHERE SERVICE OR ADJUSTMENT TO MECHANICAL, PLUMBING, OR ELECTRICAL ITEMS MAY BE REQUIRED. ACCESS PANELS SHALL BE THE FIRE RATED TYPE EQUAL TO THE RATING OF THE CEILING IN WHICH THEY OCCUR.

SPRINKLER HEAD LOCATIONS ARE NOT SHOWN ON ARCHITECTURAL REFLECTED CEILING PLANS. (BUILDING IS TO BE "FULLY SPRINKLERED") PER NFPA 13 AND OWNER'S INSURANCE COMPANY'S REQUIREMENTS. RE: FIRE PROTECTION PLANS FOR ADDITIONAL INFORMATION.

18" MINIMUM VERTICAL CLEARANCE SHALL BE MAINTAINED BETWEEN THE BOTTOM OF EXTENDED SPRINKLER HEADS AND THE TOP OF FILES, SHELVING, LOCKERS, ETC., TYPICAL, UNLESS NOTED OTHERWISE.

10. VERIFY WITH ARCHITECT LOCATION OF VISIBLE CEILING ELEMENTS NOT SHOWN ON ARCHITECTURAL DRAWINGS PRIOR TO INSTALLATION. COORDINATE WITH OTHER DRAWINGS FOR CEILING FIXTURES NOT SHOWN ON ARCHITECTURAL DRAWINGS, INCLUDING (BUT NOT LIMITED TO) ELECTRICAL AND MECHANICAL FIXTURES.

11. IF LOCATION DIMENSIONS ARE NOT INDICATED, FINAL POSITION OF ANY/ALL EXPOSED ELEMENTS SHALL BE COORDINATED WITH ARCHITECT.

12. LAY DIRECTIONAL PATTERN CEILING PANEL OR TILE ON WAY WITH PATTERN AS INDICATED BY ARCHITECT, TYPICAL, U.N.O.

13. INSTALL SIGHT BAFFLES AT RETURN AIR SLOTS. PAINT ANY NEW AREA OR ITEM ABOVE THE CEILING VISIBLE FROM THE ROOM SIDE, INCLUDING DUCTWORK, NON-SPECULAR BLACK, TYPICAL, U.N.O.

14. CEILING SUPPORT SYSTEMS ARE NOT DESIGNED OR INTENDED TO SUPPORT THE WEIGHT OF ADDITIONAL EQUIPMENT, CABLE, CONDUIT, LIGHTS, MECHANICAL EQUIPMENT OR OTHER CONSTRUCTION. SUPPORT THESE ITEMS INDEPENDENTLY FROM THE STRUCTURE ABOVE.

15. DO NOT HANG (SUPPORT) ANY ITEMS FROM METAL ROOF DECK. SUSPEND CEILING HANGERS FROM BUILDING'S STRUCTURAL MEMBERS, PLUMB AND FREE FROM CONTACT WITH INSULATION OR OTHER OBJECTS WITHIN CEILING PLENUM. SPLAY HORIZONTAL FORCES BY BRACING, COUNTER-SPLAYING, OR OTHER EQUALLY EFFECTIVE MEANS. WHERE WIDTH OF DUCTS AND OTHER CONSTRUCTION WITHIN CEILING PLENUM PRODUCES HANGER SPACING THAT INTERFERE WITH LOCATION OF HANGERS, USE TRAPEZES OR EQUIVALENT DEVICES.

16. EACH FIXTURE SHALL BE PROVIDED WITH SUPPORT WIRE, ATTACHED TO STRUCTURAL MEMBERS SO THAT THE FIXTURE IS SUPPORTED INDEPENDENTLY OF CEILING. INSTALL (1) SUPPORT @ EACH CORNER. FLEXIBLE CONDUIT, DUCT OR PIPING SHALL BE SUPPORTED SO THAT IT DOES NOT REST UPON CEILING OR TOUCH OTHER BUILDING SYSTEMS.

17. REFER TO THE INTERIOR FINISH SCHEDULE FOR PRODUCT INFORMATION.

18. AT EXPOSED CEILINGS, CONDUIT, DUCTWORK, AND PIPING TO BE PAINTED TO MATCH STRUCTURE, TYPICAL, UNLESS NOTED OTHERWISE.

19. G1 CEILING TO BE PAINTED _____, U.N.O. CONFIRM DISCREPANCIES WITH ARCHITECT.

20. REFER TO FLOOR PLANS FOR TV LOCATIONS.

21. PENETRATIONS OF NON-FIRE RATED DRYWALL ABOVE CEILING AND PENETRATIONS OF GYPSUM BOARD CEILINGS TO BE ACOUSTICALLY SEALED, TYPICAL, UNLESS NOTED OTHERWISE.

REFLECTED CEILING PLAN LEGEND

ELEVATION ABOVE FINISHED FLOOR

CEILING TYPE TA 30'-00" A1 CEILING TYPE

SUSPENDED ACOUSTICAL TILE CEILING. REFER TO CEILING TYPE SCHEDULE

DIRECT-ATTACHED ACOUSTICAL CEILING. LOCATE BETWEEN BAR JOISTS.

GYPSUM BOARD CEILING. REFER TO CEILING TYPE SCHEDULE

EXPOSED STRUCTURE. PAINT DECK, CONDUIT, DUCTWORK, AND PIPING TO MATCH STRUCTURE, TYPICAL, UNLESS NOTED OTHERWISE

CEILING LIGHT FIXTURE, RECESSED 24" x 48", RE: ELECTRICAL FOR TYPE CEILING LIGHT FIXTURE, RECESSED, 24" x 24", RE: ELECTRICAL FOR TYPE

CEILING LIGHT LINEAR PENDANT, RE:

ELECTRICAL FOR TYPE CEILING LIGHT, RECESSED, ROUND, RE: ELECTRICAL WALL-MOUNTED STRIP LIGHT FIXTURE, RE: ELECTRICAL

CEILING LINEAR SURFACE MOUNTED, RE: ELECTRICAL FOR TYPE

CEILING SUPPLY AIR DIFFUSER, REFER TO HVAC DWGS FOR SIZE AND TYPE.

CEILING RETURN AIR GRILLE, REFER TO HVAC DWGS FOR SIZE AND TYPE.

CEILING RETURN AIR GRILLE, REFER TO HVAC DWGS FOR SIZE AND TYPE.

CEILING CLOSED-CIRCUIT TV CAMERA, DOME-STYLE


CCTV

EXP-1

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



Z

1


PROJECT STATUS


SSUED SET: BID SET ISSUE DATE: 30 JAN 24 REVISIONS No. Description

REFLECTED CEILING PLAN - LEVEL 3

HECKED BY:

ROJECT NUMBER 236002-02

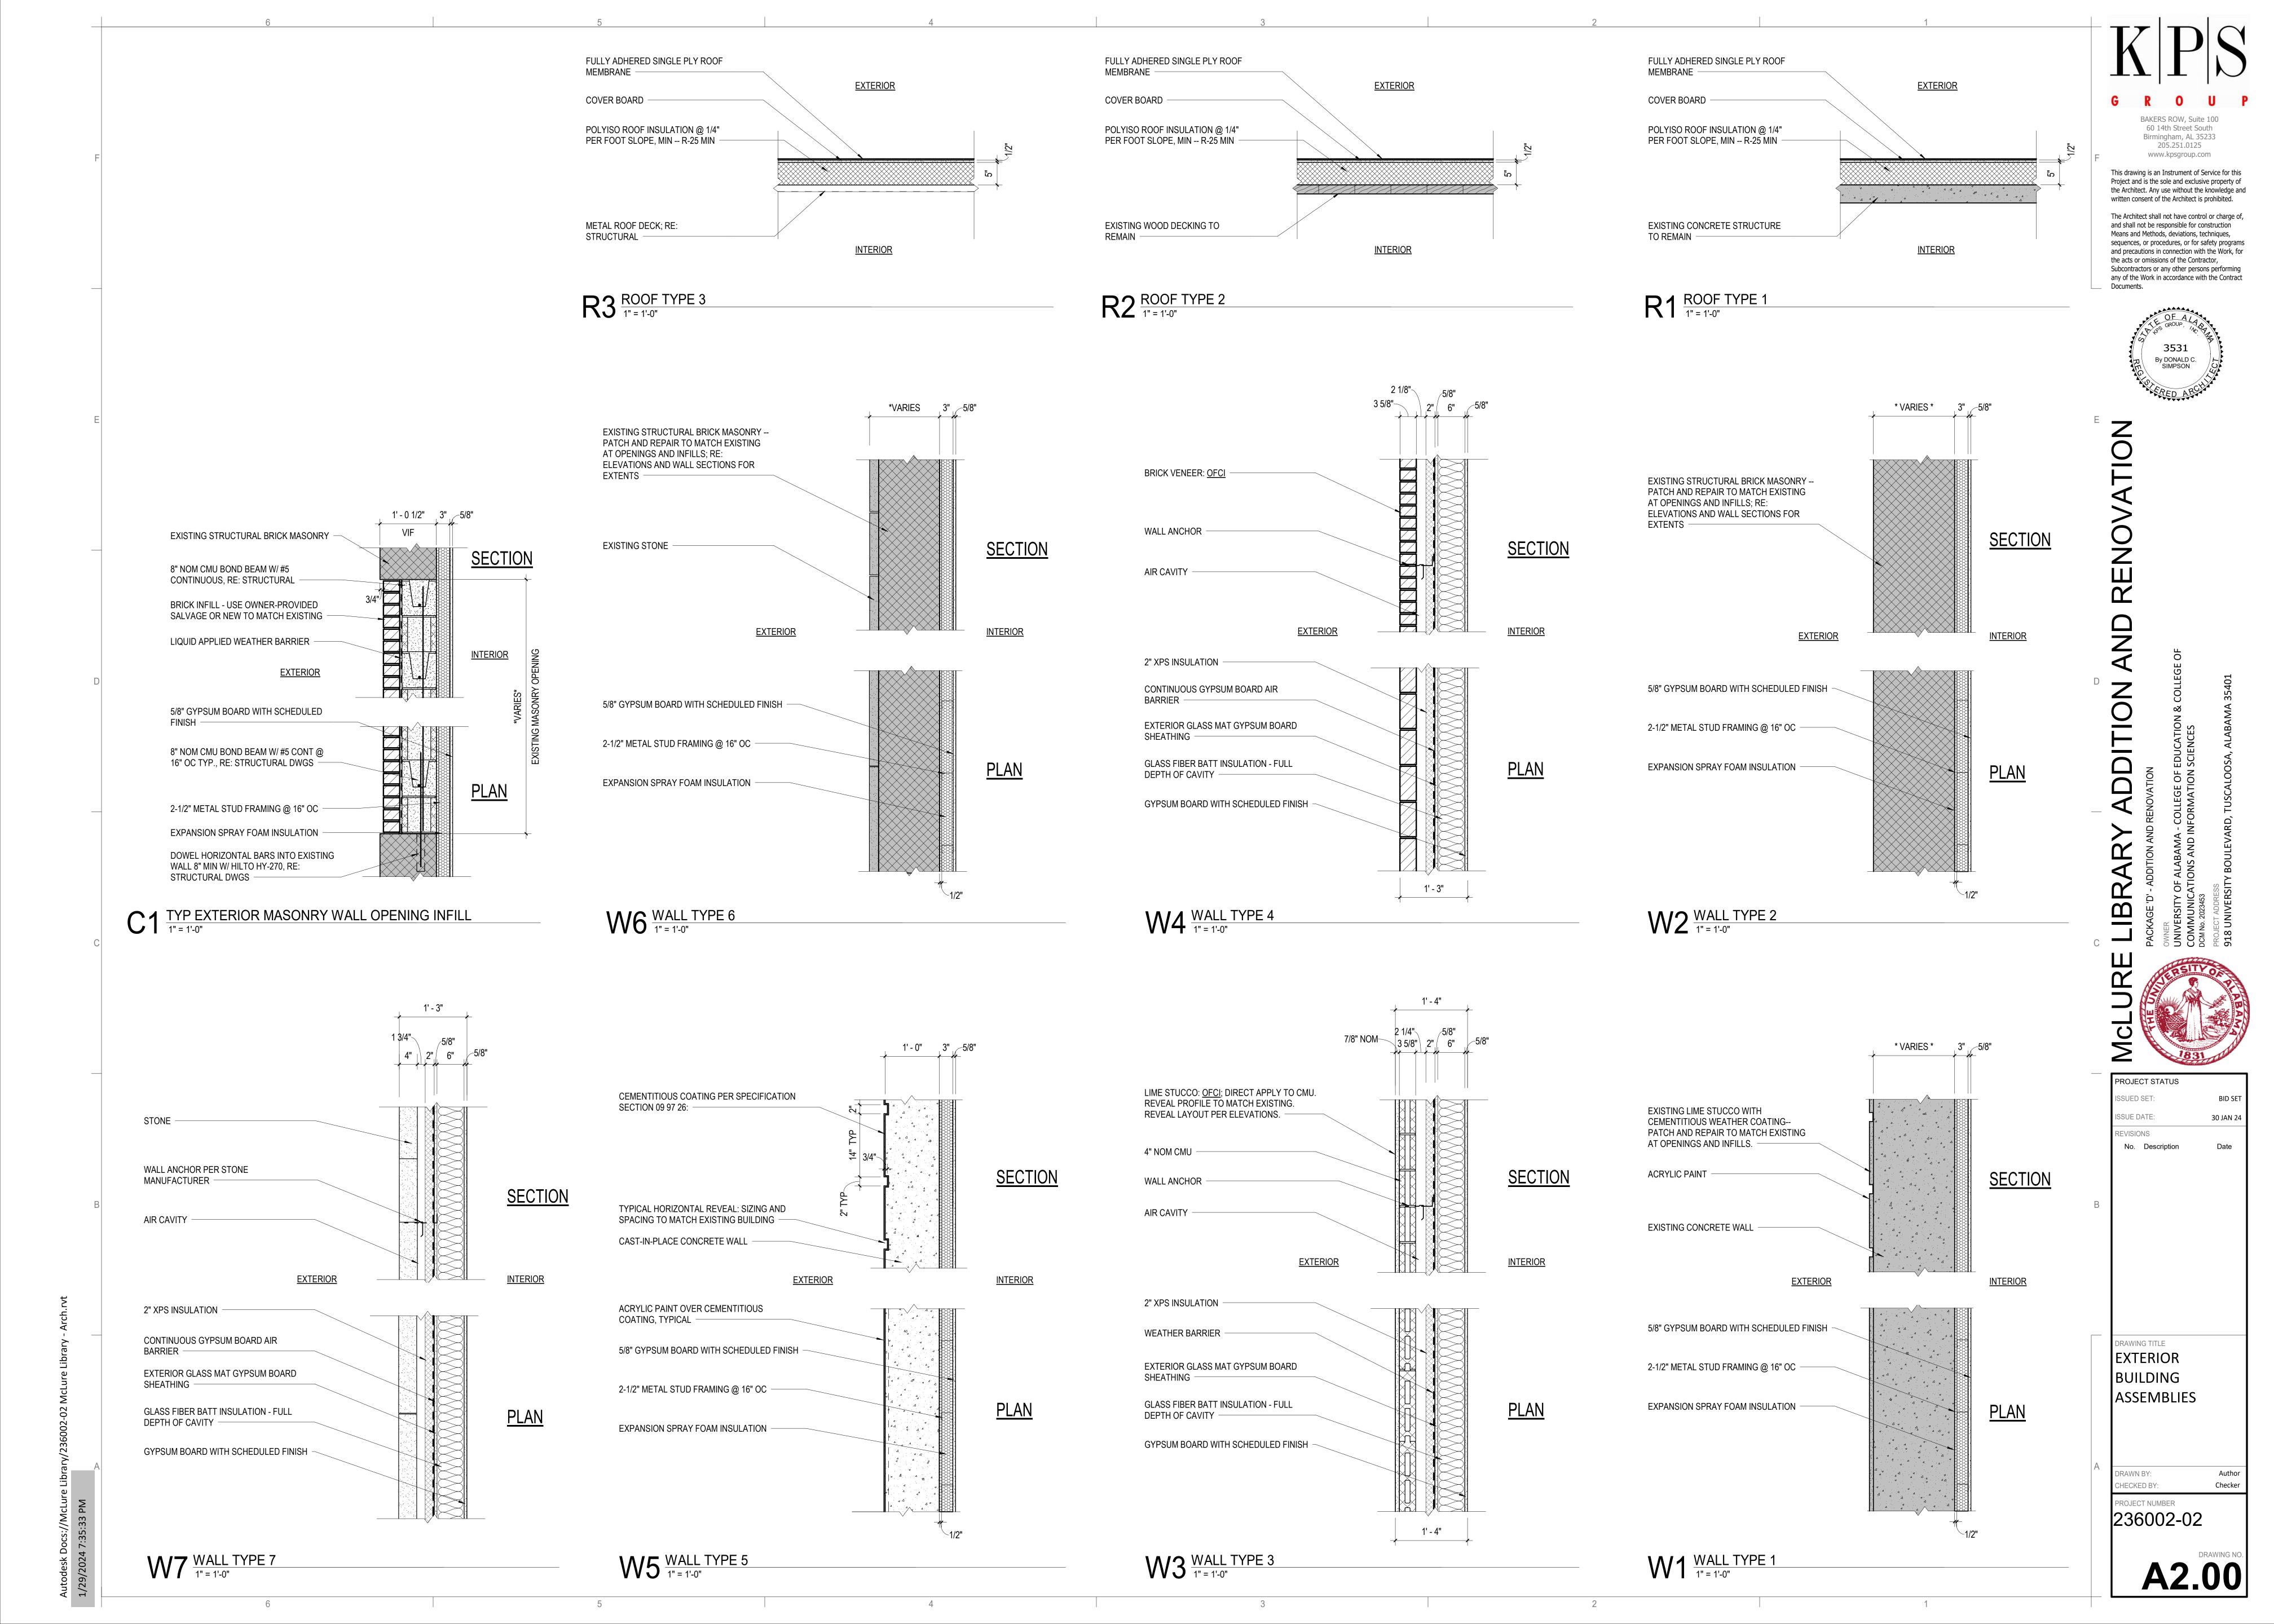

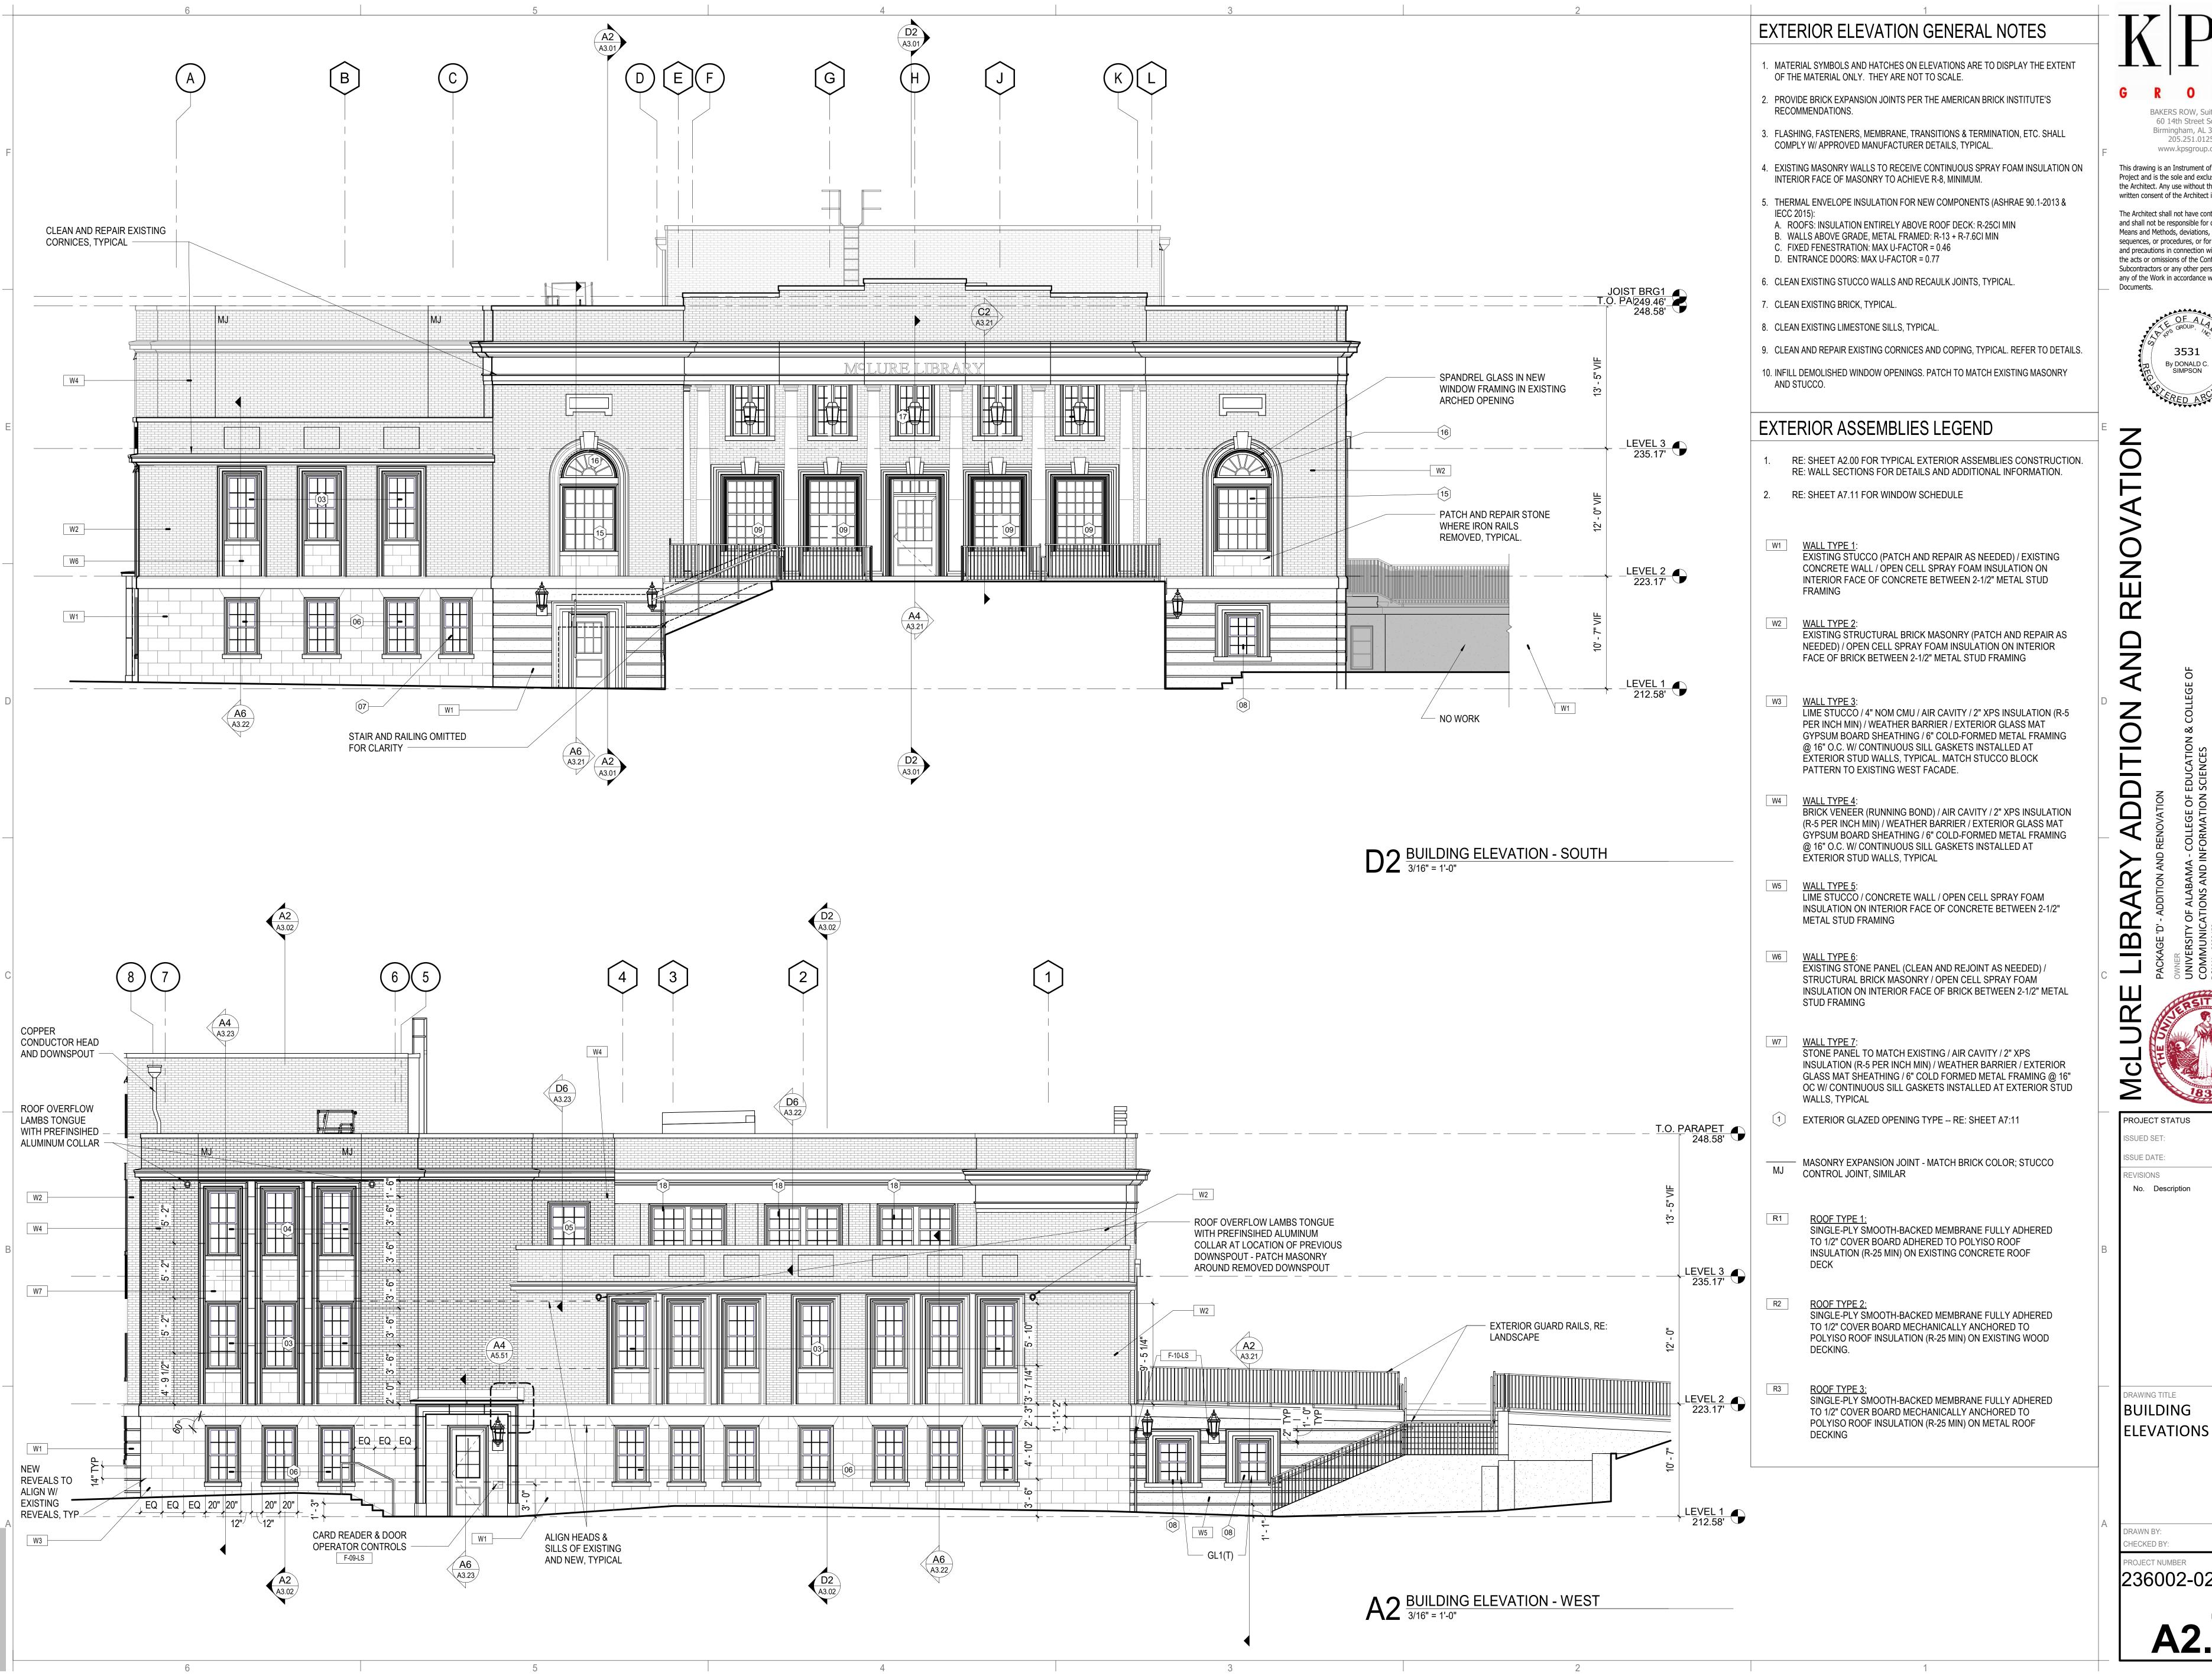


BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233

205.251.0125 www.kpsgroup.com This drawing is an Instrument of Service for this

Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited. The Architect shall not have control or charge of,


and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



ISSUE DATE: 30 JAN 24 REVISIONS No. Description BUILDING

SSUED SET:

HECKED BY: ROJECT NUMBER 236002-02

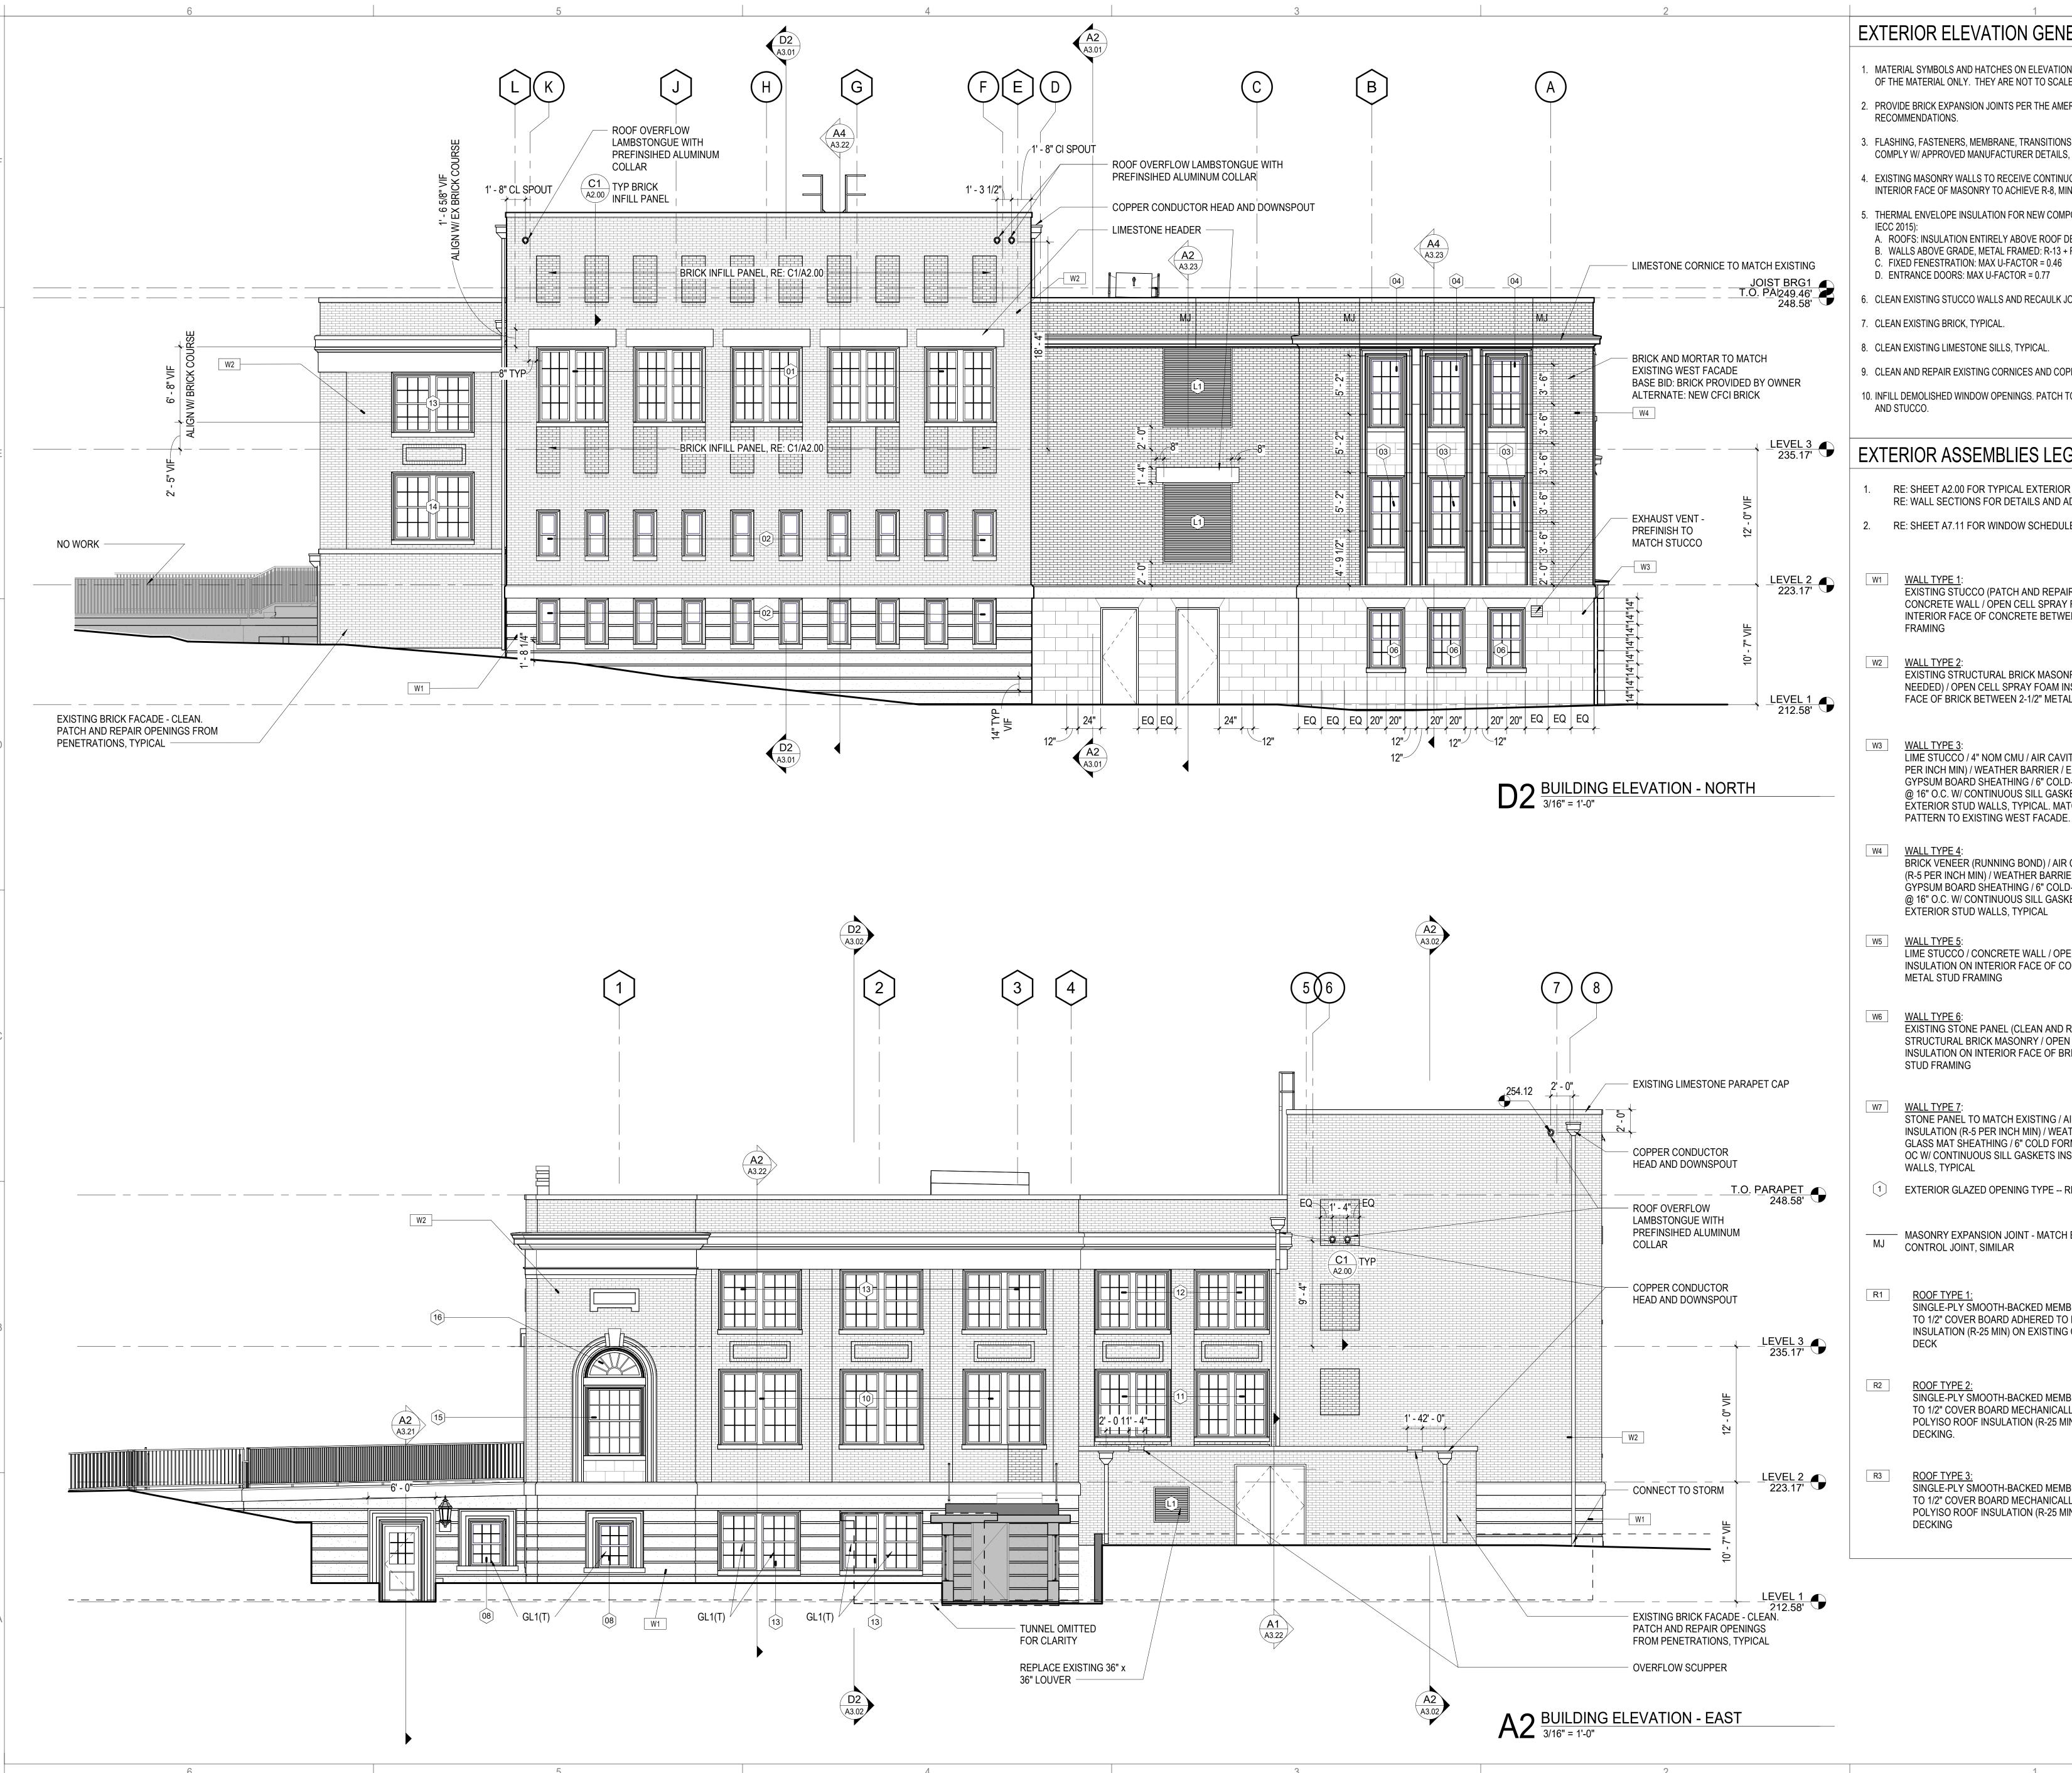

EXTERIOR ELEVATION GENERAL NOTES

- 1. MATERIAL SYMBOLS AND HATCHES ON ELEVATIONS ARE TO DISPLAY THE EXTENT OF THE MATERIAL ONLY. THEY ARE NOT TO SCALE.
 - 2. PROVIDE BRICK EXPANSION JOINTS PER THE AMERICAN BRICK INSTITUTE'S

 - 3. FLASHING, FASTENERS, MEMBRANE, TRANSITIONS & TERMINATION, ETC. SHALL COMPLY W/ APPROVED MANUFACTURER DETAILS, TYPICAL.
 - 4. EXISTING MASONRY WALLS TO RECEIVE CONTINUOUS SPRAY FOAM INSULATION ON INTERIOR FACE OF MASONRY TO ACHIEVE R-8, MINIMUM.
 - THERMAL ENVELOPE INSULATION FOR NEW COMPONENTS (ASHRAE 90.1-2013 &

 - A. ROOFS: INSULATION ENTIRELY ABOVE ROOF DECK: R-25CI MIN B. WALLS ABOVE GRADE, METAL FRAMED: R-13 + R-7.6CI MIN
 - C. FIXED FENESTRATION: MAX U-FACTOR = 0.46 D. ENTRANCE DOORS: MAX U-FACTOR = 0.77
 - CLEAN EXISTING STUCCO WALLS AND RECAULK JOINTS, TYPICAL.
 - CLEAN EXISTING BRICK, TYPICAL.
 - 8. CLEAN EXISTING LIMESTONE SILLS, TYPICAL.
 - 9. CLEAN AND REPAIR EXISTING CORNICES AND COPING, TYPICAL. REFER TO DETAILS
 - 10. INFILL DEMOLISHED WINDOW OPENINGS. PATCH TO MATCH EXISTING MASONRY AND STUCCO.

EXTERIOR ASSEMBLIES LEGEND


- RE: SHEET A2.00 FOR TYPICAL EXTERIOR ASSEMBLIES CONSTRUCTION. RE: WALL SECTIONS FOR DETAILS AND ADDITIONAL INFORMATION.
- RE: SHEET A7.11 FOR WINDOW SCHEDULE
- WALL TYPE 1:
- EXISTING STUCCO (PATCH AND REPAIR AS NEEDED) / EXISTING CONCRETE WALL / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF CONCRETE BETWEEN 2-1/2" METAL STUD FRAMING
- EXISTING STRUCTURAL BRICK MASONRY (PATCH AND REPAIR AS NEEDED) / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF BRICK BETWEEN 2-1/2" METAL STUD FRAMING
- LIME STUCCO / 4" NOM CMU / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT GYPSUM BOARD SHEATHING / 6" COLD-FORMED METAL FRAMING @ 16" O.C. W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD WALLS, TYPICAL. MATCH STUCCO BLOCK
- BRICK VENEER (RUNNING BOND) / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT GYPSUM BOARD SHEATHING / 6" COLD-FORMED METAL FRAMING @ 16" O.C. W/ CONTINUOUS SILL GASKETS INSTALLED AT
- LIME STUCCO / CONCRETE WALL / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF CONCRETE BETWEEN 2-1/2"
- WALL TYPE 6: EXISTING STONE PANEL (CLEAN AND REJOINT AS NEEDED) / STRUCTURAL BRICK MASONRY / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF BRICK BETWEEN 2-1/2" METAL
- STUD FRAMING WALL TYPE 7:
- STONE PANEL TO MATCH EXISTING / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT SHEATHING / 6" COLD FORMED METAL FRAMING @ 16" OC W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD
- EXTERIOR GLAZED OPENING TYPE -- RE: SHEET A7:11
- MASONRY EXPANSION JOINT MATCH BRICK COLOR; STUCCO MJ CONTROL JOINT, SIMILAR
- SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD ADHERED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING CONCRETE ROOF
- **ROOF TYPE 2:** SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING WOOD
- SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO POLYISO ROOF INSULATION (R-25 MIN) ON METAL ROOF

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125

www.kpsgroup.com This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

written consent of the Architect is prohibited. The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing

any of the Work in accordance with the Contract



RENO

Z

<


 \Box

 \geq PROJECT STATUS SSUED SET: ISSUE DATE: 30 JAN 24 REVISIONS No. Description

BUILDING

ELEVATIONS

HECKED BY: PROJECT NUMBER 236002-02

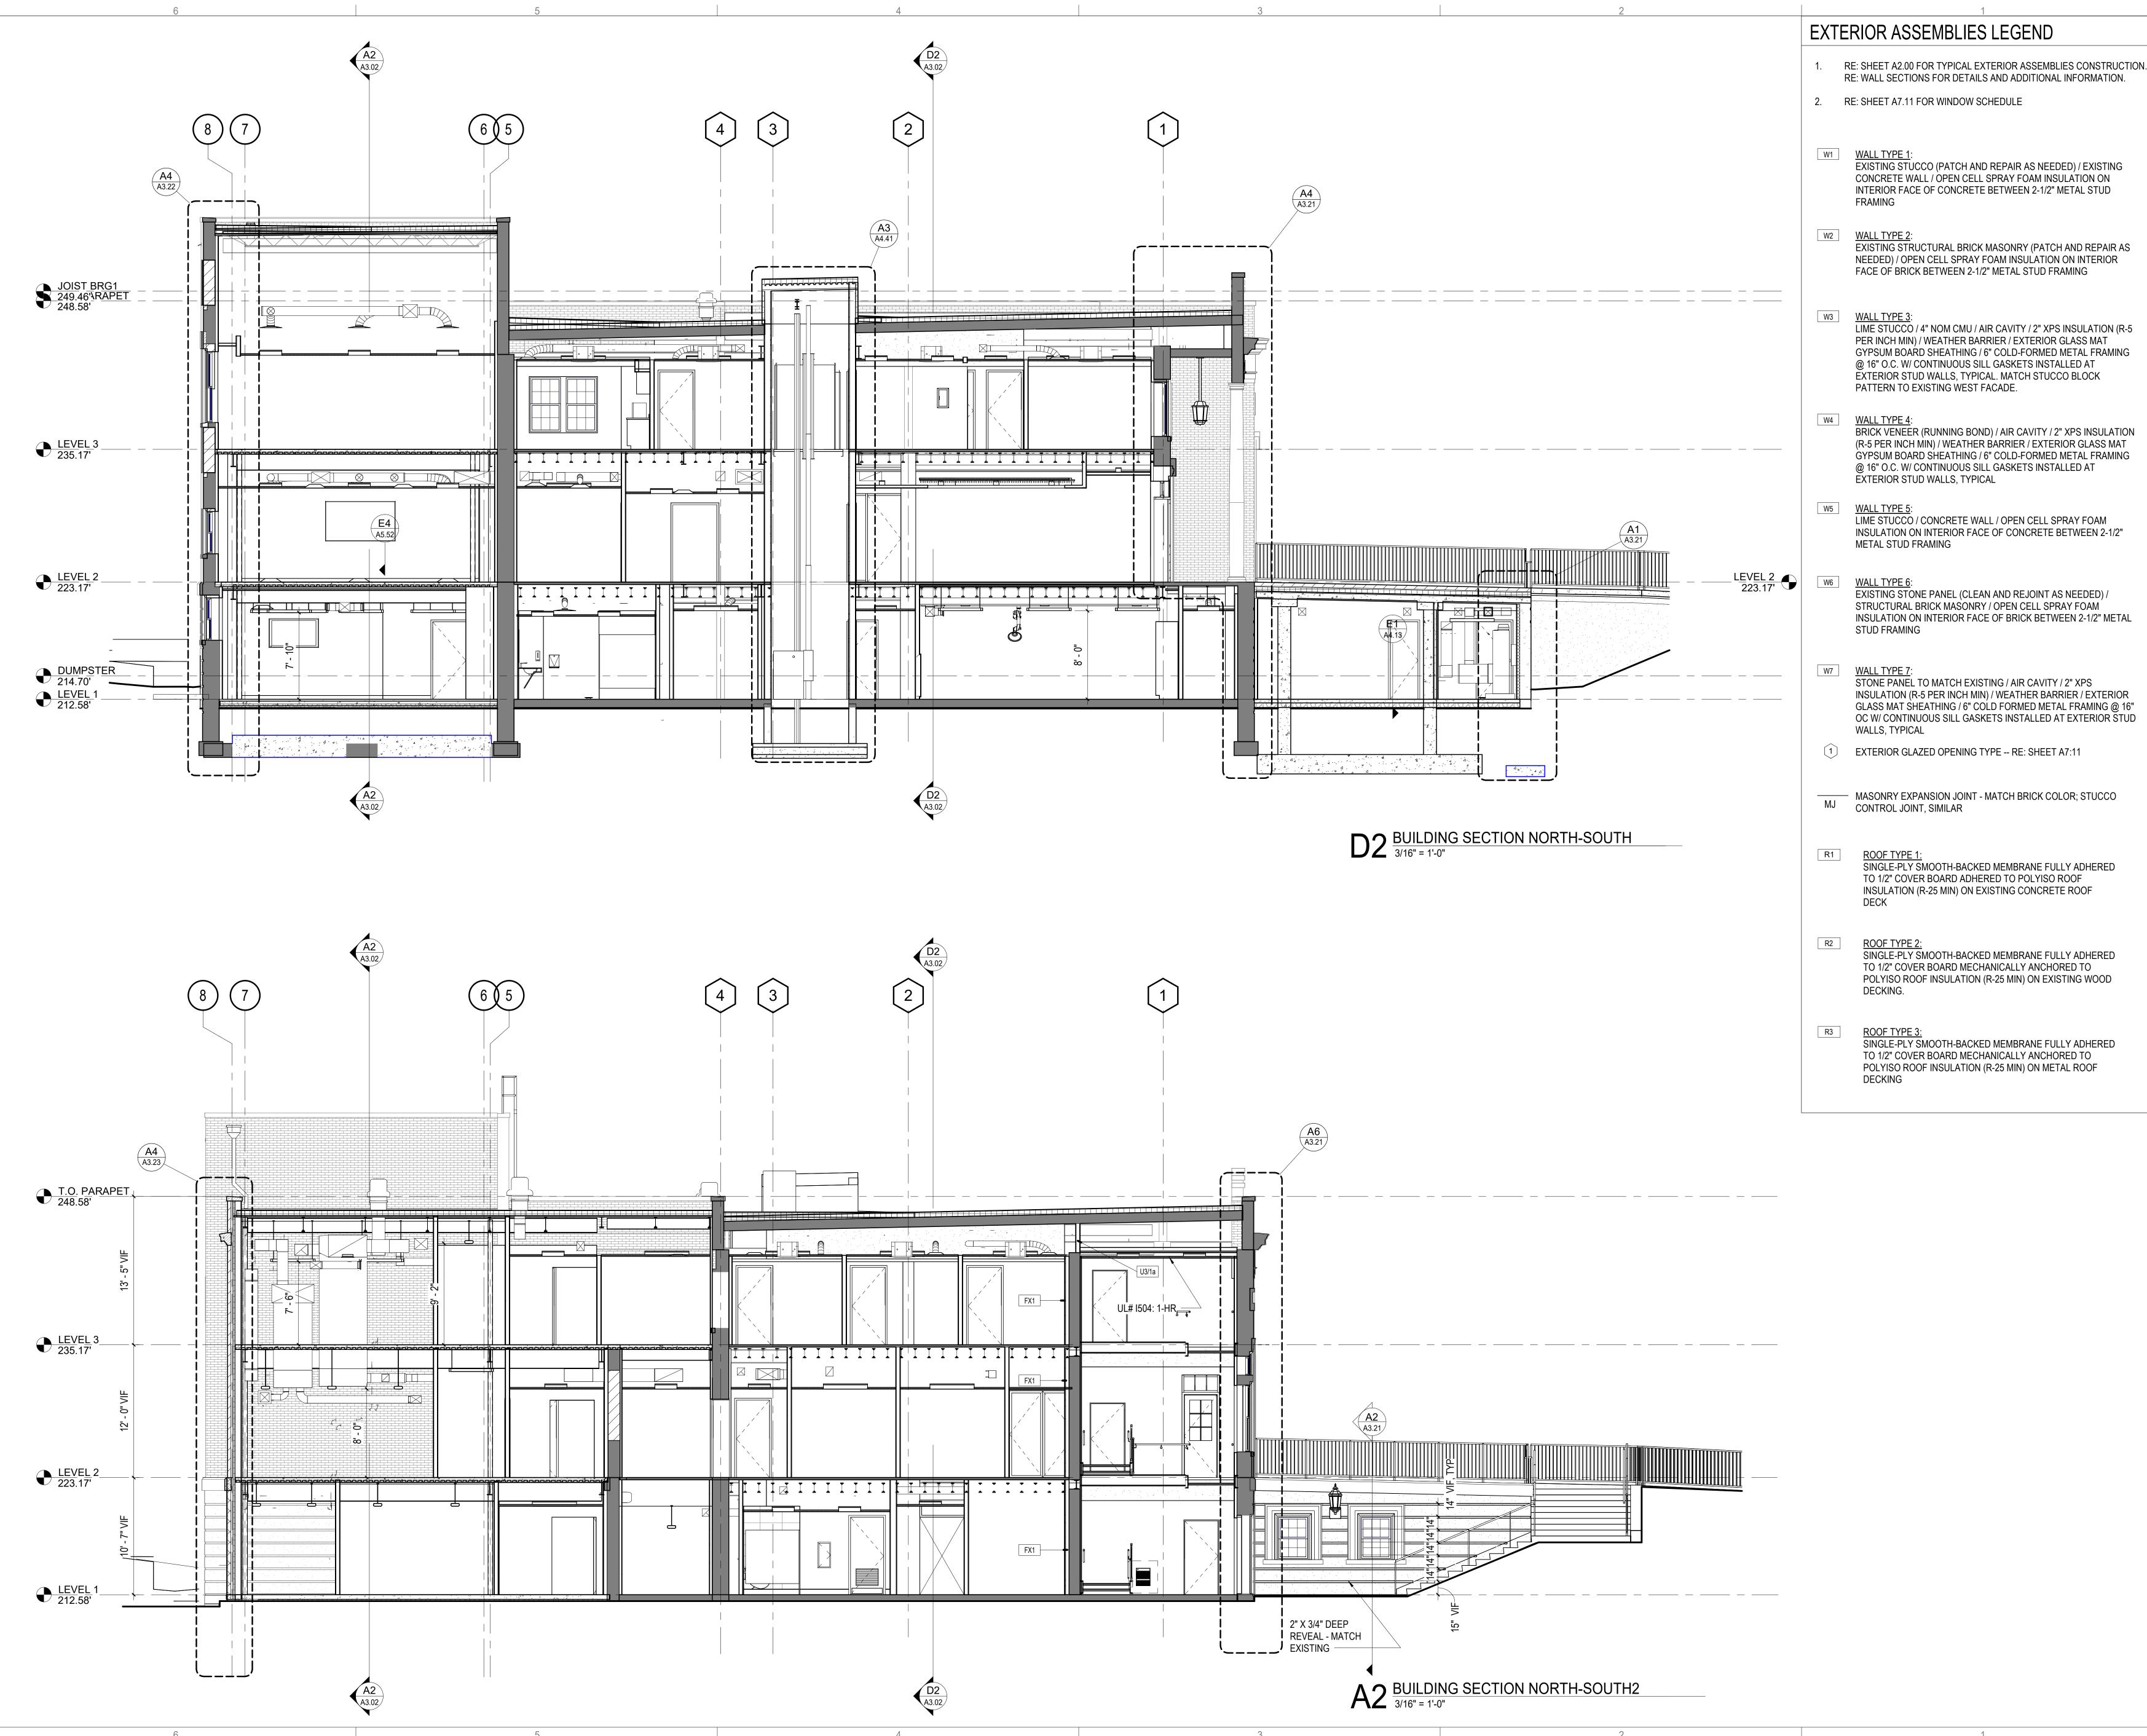

BAKERS ROW, Suite 100 60 14th Street South

Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract Documents.



BRICK VENEER (RUNNING BOND) / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT GYPSUM BOARD SHEATHING / 6" COLD-FORMED METAL FRAMING @ 16" O.C. W/ CONTINUOUS SILL GASKETS INSTALLED AT

LIME STUCCO / CONCRETE WALL / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF CONCRETE BETWEEN 2-1/2"

EXISTING STONE PANEL (CLEAN AND REJOINT AS NEEDED) / STRUCTURAL BRICK MASONRY / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF BRICK BETWEEN 2-1/2" METAL

STONE PANEL TO MATCH EXISTING / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT SHEATHING / 6" COLD FORMED METAL FRAMING @ 16" OC W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD


1 EXTERIOR GLAZED OPENING TYPE -- RE: SHEET A7:11

MASONRY EXPANSION JOINT - MATCH BRICK COLOR; STUCCO

SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD ADHERED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING CONCRETE ROOF

SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING WOOD

SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO POLYISO ROOF INSULATION (R-25 MIN) ON METAL ROOF



RENO

PROJECT STATUS SSUED SET: SSUE DATE: 30 JAN 24 REVISIONS

RAWING TITLE BUILDING SECTIONS

No. Description

HECKED BY:

PROJECT NUMBER 236002-02

EXTERIOR ASSEMBLIES LEGEND

- 1. RE: SHEET A2.00 FOR TYPICAL EXTERIOR ASSEMBLIES CONSTRUCTION. RE: WALL SECTIONS FOR DETAILS AND ADDITIONAL INFORMATION.
- 2. RE: SHEET A7.11 FOR WINDOW SCHEDULE

W1 WALL TYPE 1:

EXISTING STUCCO (PATCH AND REPAIR AS NEEDED) / EXISTING CONCRETE WALL / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF CONCRETE BETWEEN 2-1/2" METAL STUD FRAMING

W2

EXISTING STRUCTURAL BRICK MASONRY (PATCH AND REPAIR AS NEEDED) / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF BRICK BETWEEN 2-1/2" METAL STUD FRAMING

WALL TYPE 3:

LIME STUCCO / 4" NOM CMU / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT GYPSUM BOARD SHEATHING / 6" COLD-FORMED METAL FRAMING @ 16" O.C. W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD WALLS, TYPICAL. MATCH STUCCO BLOCK PATTERN TO EXISTING WEST FACADE.

BRICK VENEER (RUNNING BOND) / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT GYPSUM BOARD SHEATHING / 6" COLD-FORMED METAL FRAMING @ 16" O.C. W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD WALLS, TYPICAL

INSULATION ON INTERIOR FACE OF CONCRETE BETWEEN 2-1/2" METAL STUD FRAMING

LIME STUCCO / CONCRETE WALL / OPEN CELL SPRAY FOAM

WALL TYPE 6:

EXISTING STONE PANEL (CLEAN AND REJOINT AS NEEDED) / STRUCTURAL BRICK MASONRY / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF BRICK BETWEEN 2-1/2" METAL STUD FRAMING

W7 WALL TYPE 7:

STONE PANEL TO MATCH EXISTING / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT SHEATHING / 6" COLD FORMED METAL FRAMING @ 16" OC W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD WALLS, TYPICAL

1 EXTERIOR GLAZED OPENING TYPE -- RE: SHEET A7:11

MASONRY EXPANSION JOINT - MATCH BRICK COLOR; STUCCO MJ CONTROL JOINT, SIMILAR

SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD ADHERED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING CONCRETE ROOF

ROOF TYPE 2: SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING WOOD


ROOF TYPE 3: SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO POLYISO ROOF INSULATION (R-25 MIN) ON METAL ROOF DECKING

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125

www.kpsgroup.com This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

written consent of the Architect is prohibited. The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor,

Subcontractors or any other persons performing



RENO

PROJECT STATUS SSUED SET: SSUE DATE: 30 JAN 24 REVISIONS


RAWING TITLE BUILDING SECTIONS

No. Description

HECKED BY:

ROJECT NUMBER 236002-02

A3.02

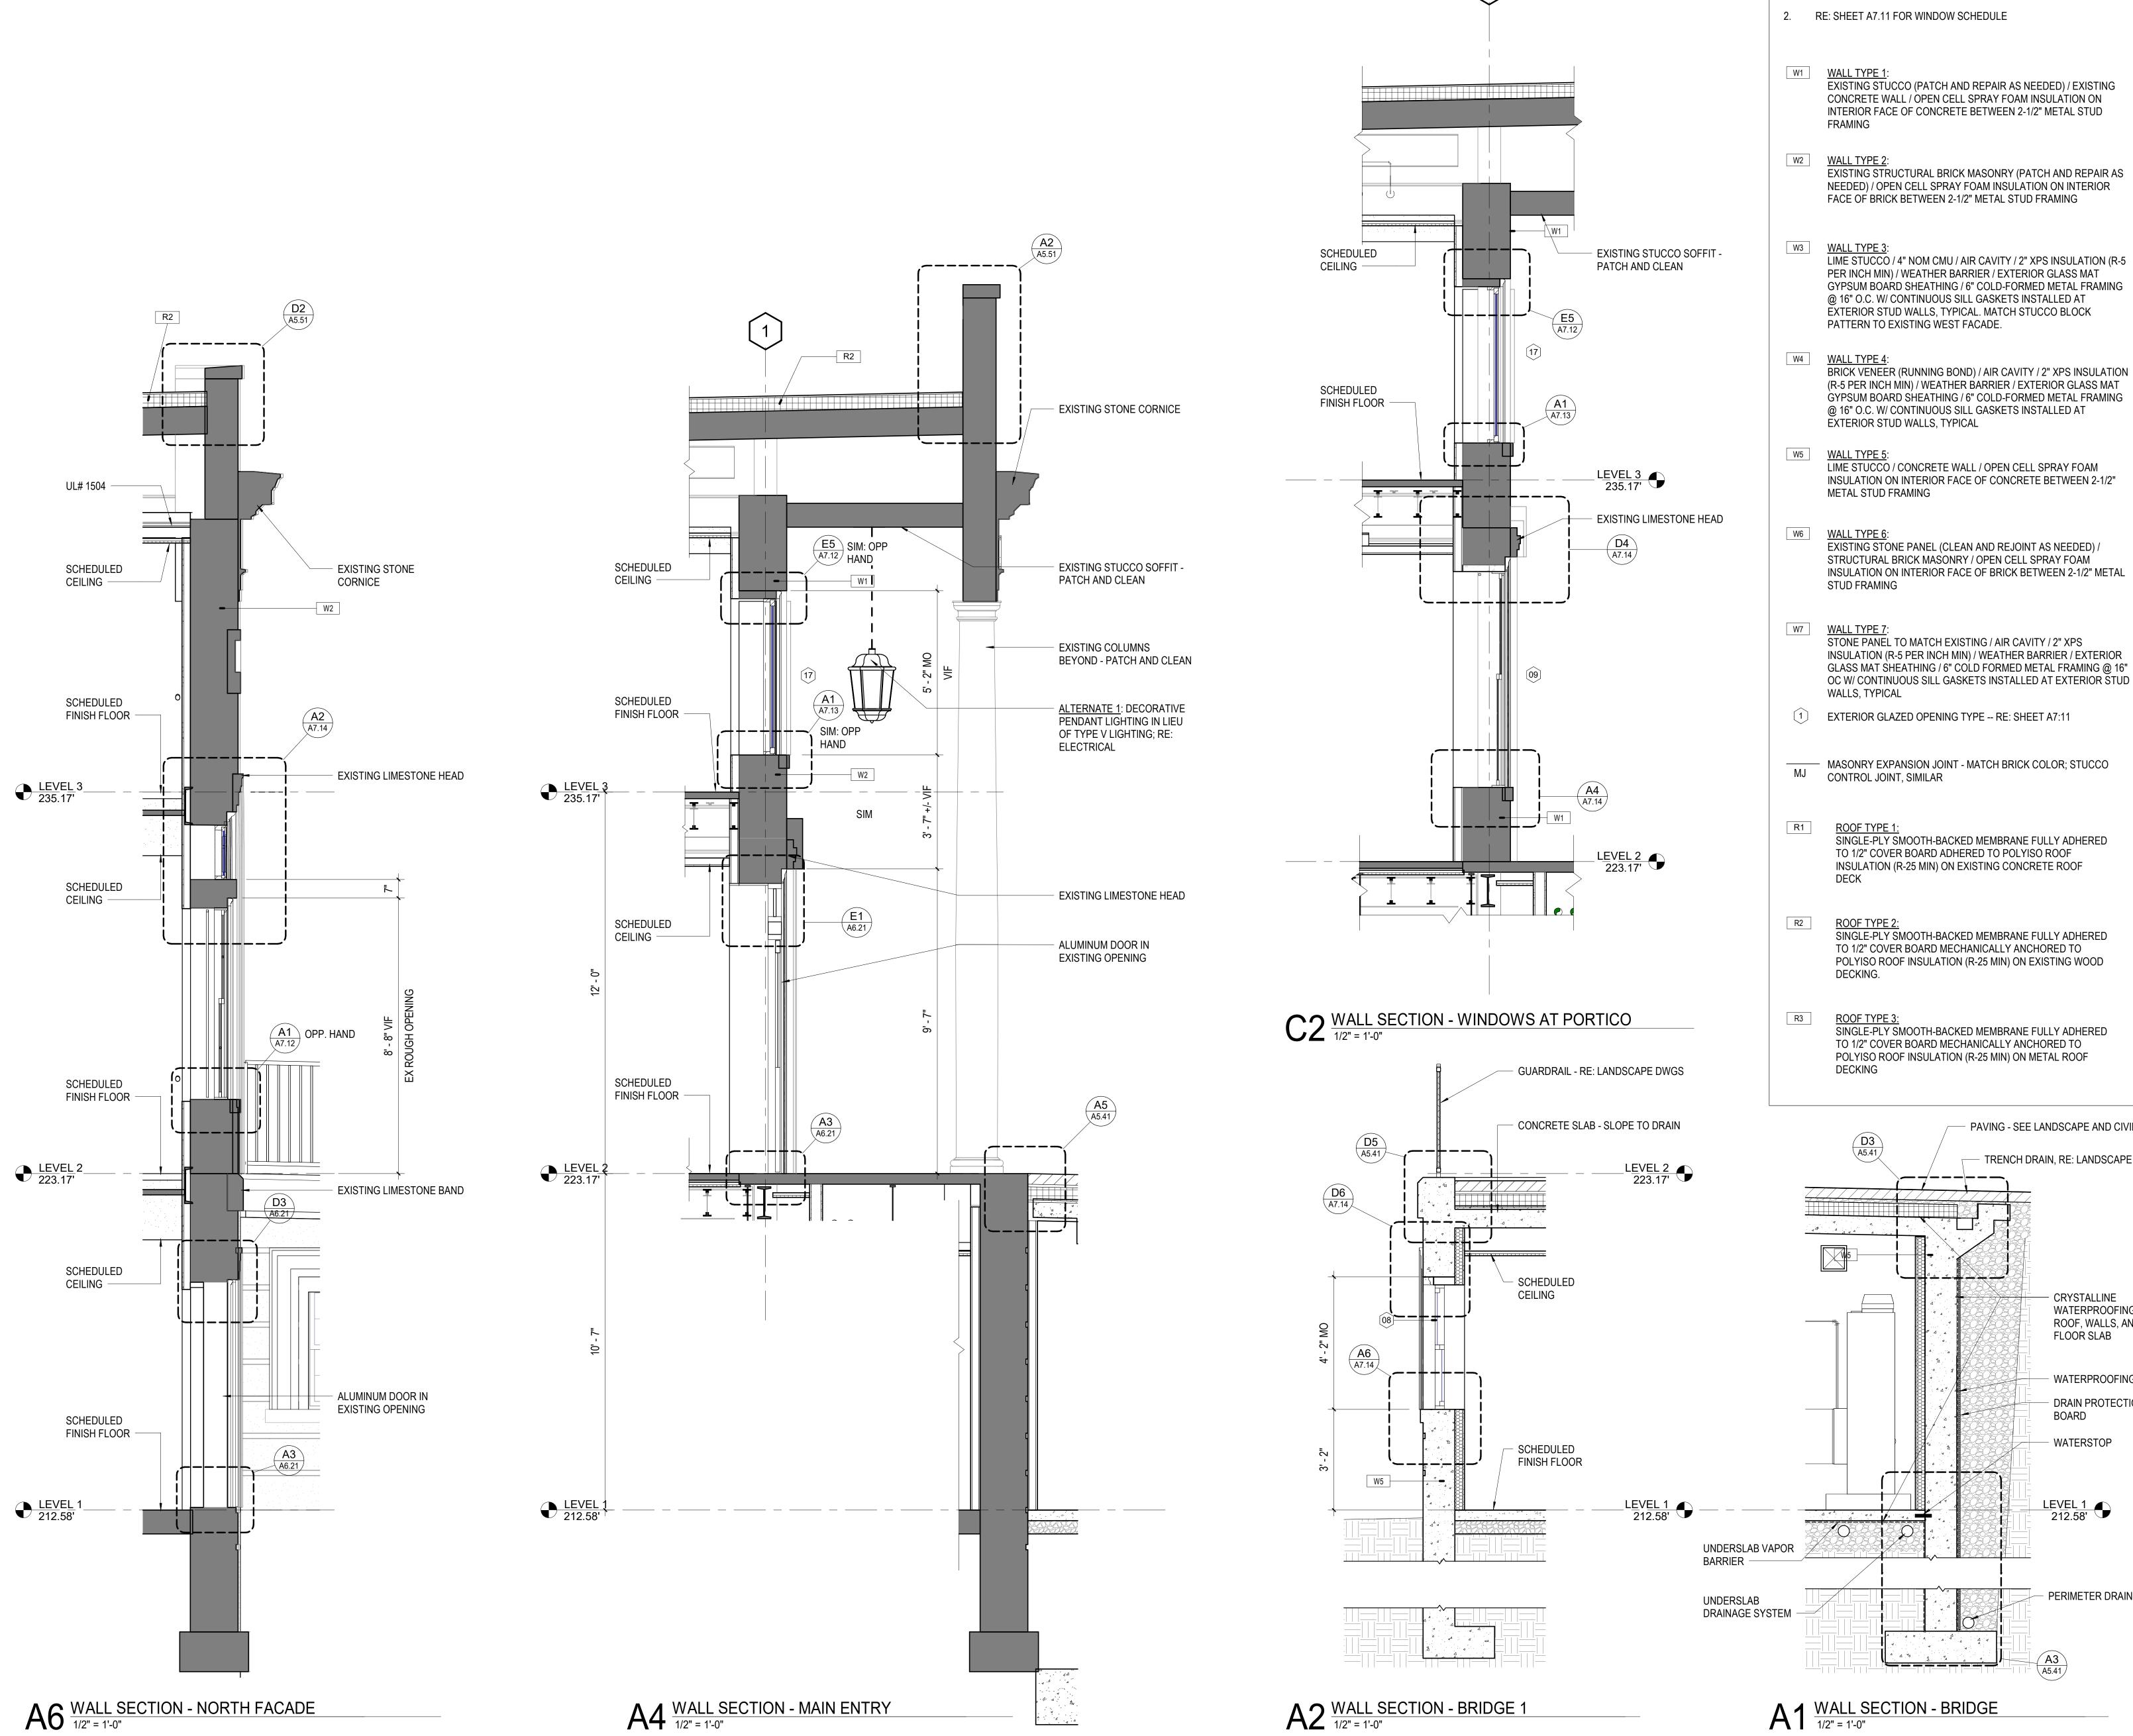

RE: SHEET A2.00 FOR TYPICAL EXTERIOR ASSEMBLIES CONSTRUCTION.

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of

the Architect. Any use without the knowledge and written consent of the Architect is prohibited. The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques,

sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract Documents.



NOL

ENO

Z

DDIT

BR

SSUED SET:

SSUE DATE:

REVISIONS

No. Description

BRICK VENEER (RUNNING BOND) / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT GYPSUM BOARD SHEATHING / 6" COLD-FORMED METAL FRAMING @ 16" O.C. W/ CONTINUOUS SILL GASKETS INSTALLED AT

LIME STUCCO / CONCRETE WALL / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF CONCRETE BETWEEN 2-1/2"

EXTERIOR ASSEMBLIES LEGEND

RE: WALL SECTIONS FOR DETAILS AND ADDITIONAL INFORMATION.

EXISTING STONE PANEL (CLEAN AND REJOINT AS NEEDED) / STRUCTURAL BRICK MASONRY / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF BRICK BETWEEN 2-1/2" METAL


STONE PANEL TO MATCH EXISTING / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT SHEATHING / 6" COLD FORMED METAL FRAMING @ 16" OC W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD

MASONRY EXPANSION JOINT - MATCH BRICK COLOR; STUCCO

SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD ADHERED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING CONCRETE ROOF

SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING WOOD

SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO POLYISO ROOF INSULATION (R-25 MIN) ON METAL ROOF

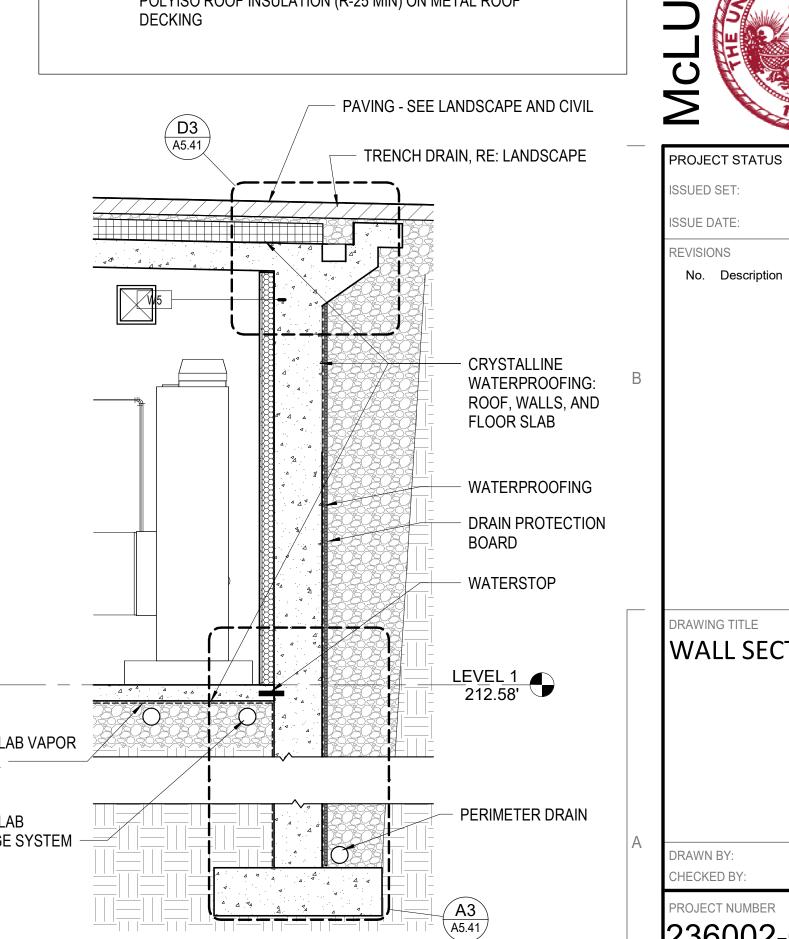


WALL SECTIONS


BID SET

30 JAN 24

ROJECT NUMBER 236002-02

A3.21

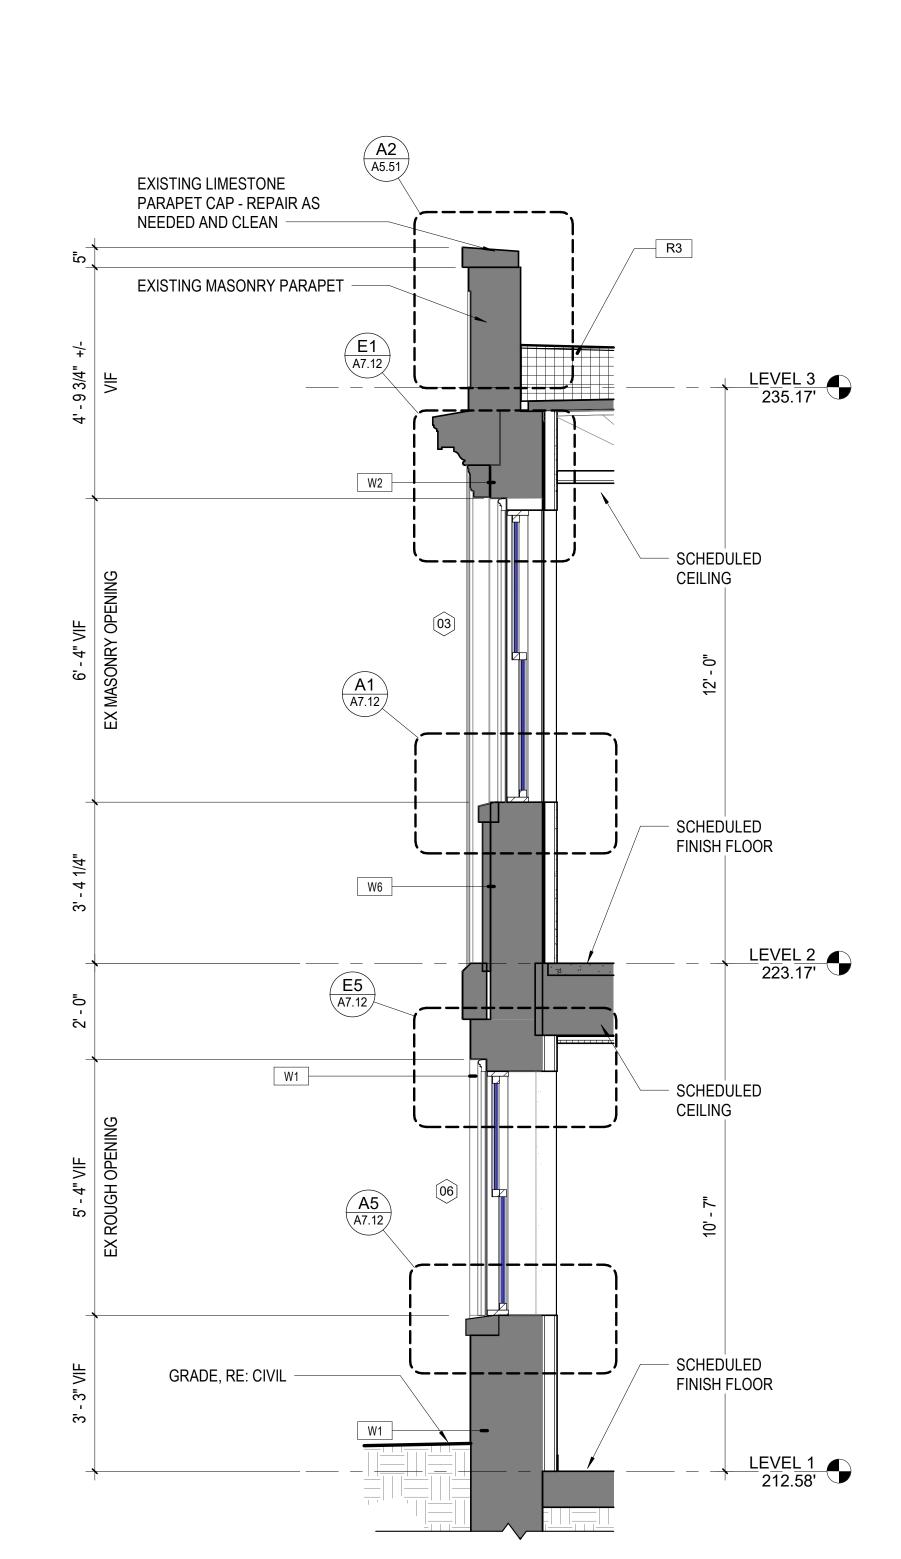

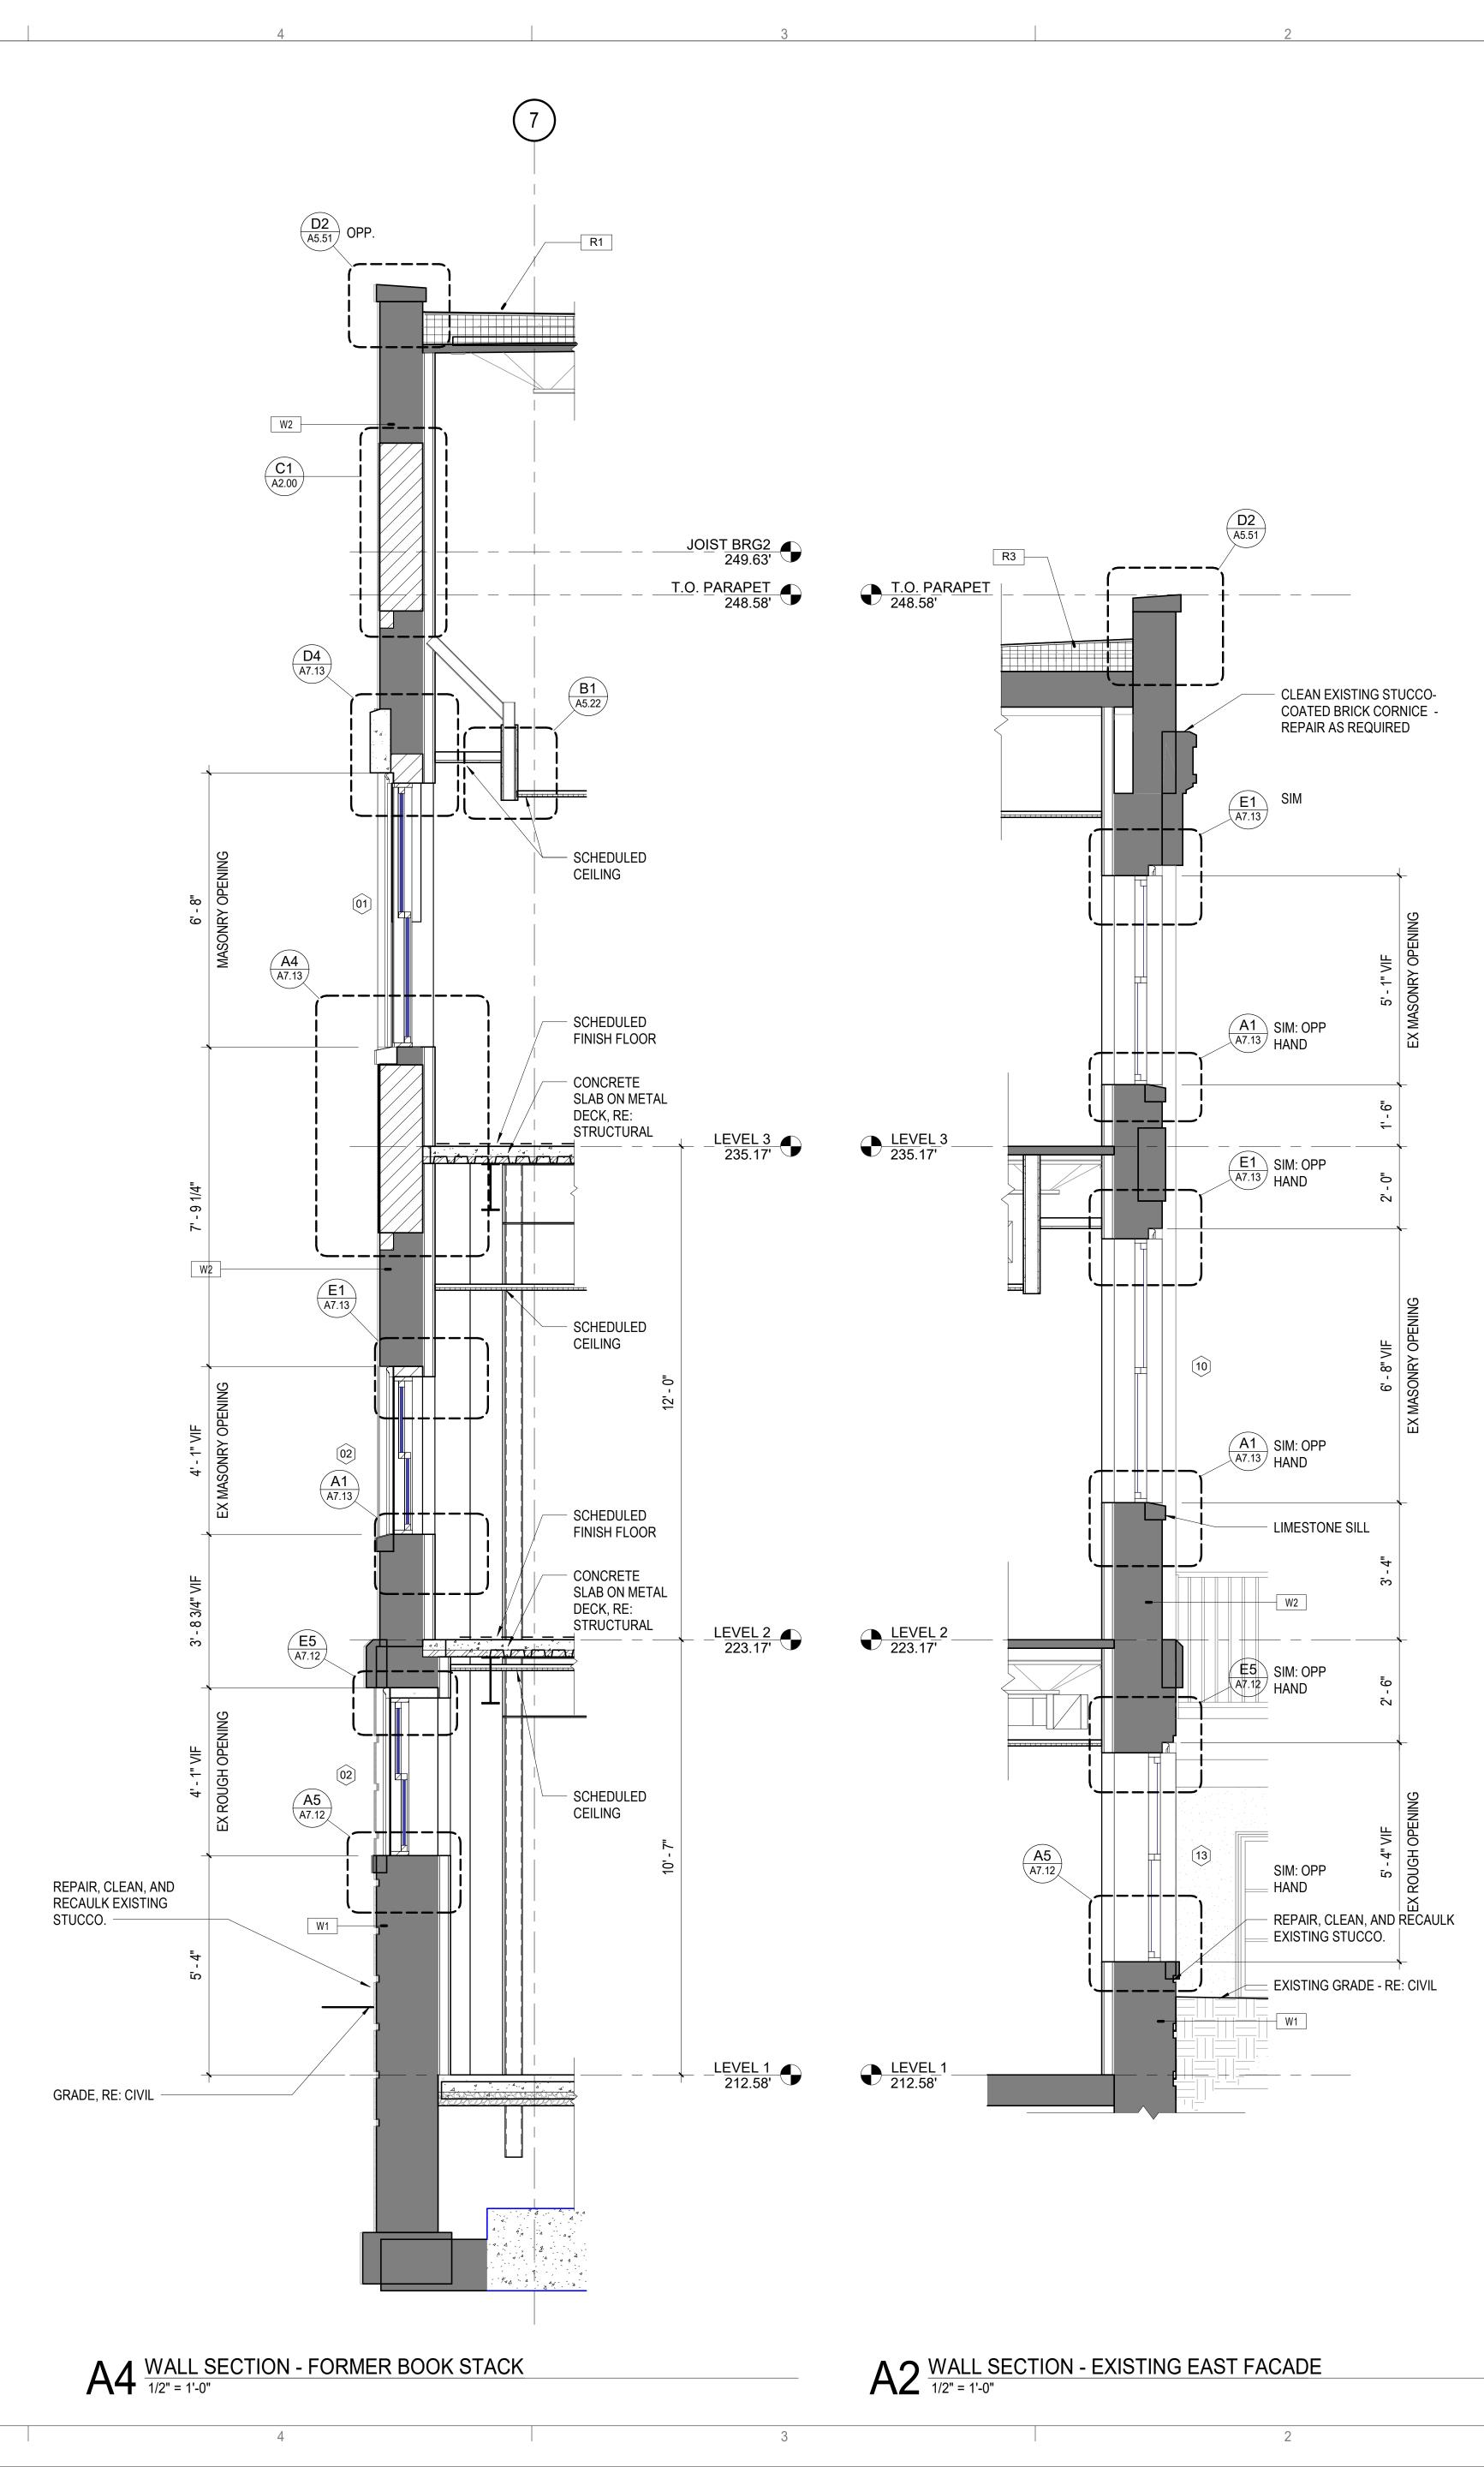

EXTERIOR ASSEMBLIES LEGEND

 RE: SHEET A2.00 FOR TYPICAL EXTERIOR ASSEMBLIES CONSTRUCTION. RE: WALL SECTIONS FOR DETAILS AND ADDITIONAL INFORMATION.

2. RE: SHEET A7.11 FOR WINDOW SCHEDULE

W1 WALL TYPE 1:

EXISTING STUCCO (PATCH AND REPAIR AS NEEDED) / EXISTING CONCRETE WALL / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF CONCRETE BETWEEN 2-1/2" METAL STUD FRAMING

W2 WALL TYPE 2:
EXISTING STRUCTURAL BRICK MASONRY (PATCH AND REPAIR AS NEEDED) / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF BRICK BETWEEN 2-1/2" METAL STUD FRAMING

WALL TYPE 3:
LIME STUCCO / 4" NOM CMU / AIR CAVITY / 2" XPS INSULATION (R-5
PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT
GYPSUM BOARD SHEATHING / 6" COLD-FORMED METAL FRAMING
@ 16" O.C. W/ CONTINUOUS SILL GASKETS INSTALLED AT
EXTERIOR STUD WALLS, TYPICAL. MATCH STUCCO BLOCK
PATTERN TO EXISTING WEST FACADE.

WALL TYPE 4:
BRICK VENEER (RUNNING BOND) / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT GYPSUM BOARD SHEATHING / 6" COLD-FORMED METAL FRAMING @ 16" O.C. W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD WALLS, TYPICAL

WALL TYPE 5:
LIME STUCCO / CONCRETE WALL / OPEN CELL SPRAY FOAM
INSULATION ON INTERIOR FACE OF CONCRETE BETWEEN 2-1/2"
METAL STUD FRAMING

WALL TYPE 6:
EXISTING STONE PANEL (CLEAN AND REJOINT AS NEEDED) /
STRUCTURAL BRICK MASONRY / OPEN CELL SPRAY FOAM
INSULATION ON INTERIOR FACE OF BRICK BETWEEN 2-1/2" METAL
STUD FRAMING

WALL TYPE 7:
STONE PANEL TO MATCH EXISTING / AIR CAVITY / 2" XPS
INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR
GLASS MAT SHEATHING / 6" COLD FORMED METAL FRAMING @ 16"
OC W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD
WALLS, TYPICAL

1 EXTERIOR GLAZED OPENING TYPE -- RE: SHEET A7:11


MASONRY EXPANSION JOINT - MATCH BRICK COLOR; STUCCO CONTROL JOINT, SIMILAR

R1 ROOF TYPE 1:
SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD ADHERED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING CONCRETE ROOF

ROOF TYPE 2:
SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING WOOD DECKING.

R3

ROOF TYPE 3:
SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED
TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO
POLYISO ROOF INSULATION (R-25 MIN) ON METAL ROOF
DECKING

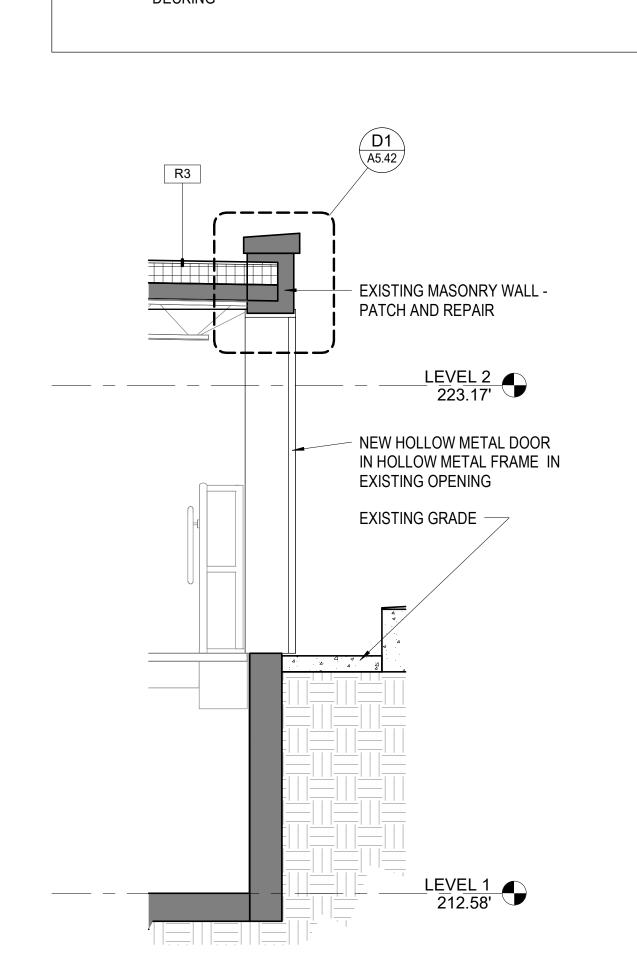

A1 WALL SECTION - MECHANICAL ROOM 1/2" = 1'-0"


KPS

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract

Documents.



ON AND RENOVATION

A COLLEGE OF

OWNER

UNIVERSITY OF ALABAMA - COLLEG

COMMUNICATIONS AND INFORMA

DCM No. 2023453

PROJECT ADDRESS

PROJECT STATUS

ISSUED SET:

ISSUE DATE:

30 JAN 24

REVISIONS

ISSUED SET: 30 JAN 24

REVISIONS
No. Description Date

DRAWING TITLE

WALL SECTIONS


PROJECT NUMBER
236002-02


A3.22


/29/2024 7:35:51 PM

A6 WALL SECTION - EXISTING WEST FACADE $\frac{1}{2}$ = 1'-0"

 $D6 \frac{\text{WALL SECTION - AT ADDITION ABOVE ROOF}}{1/2" = 1'-0"}$

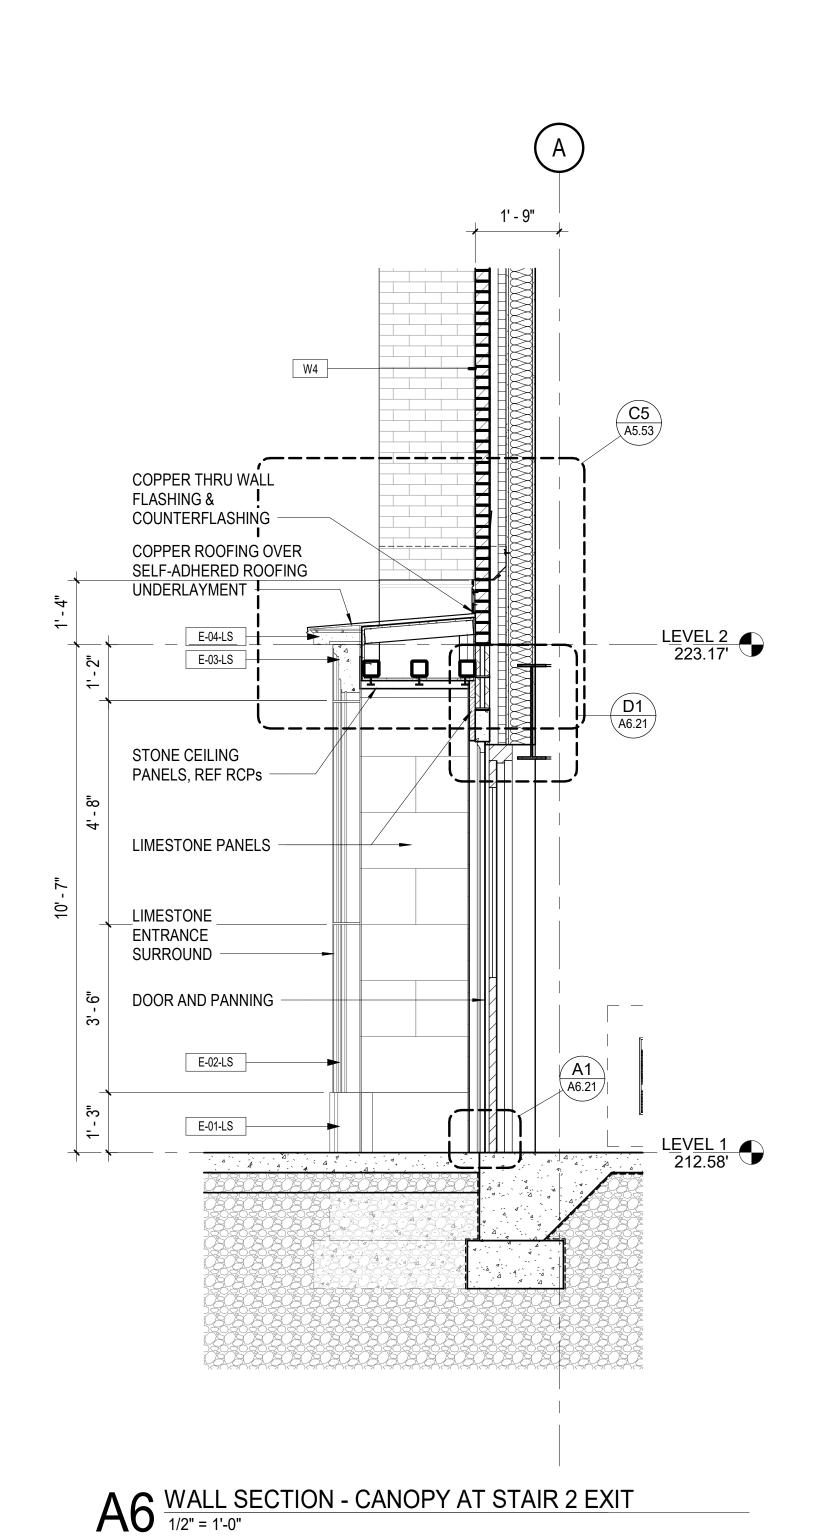

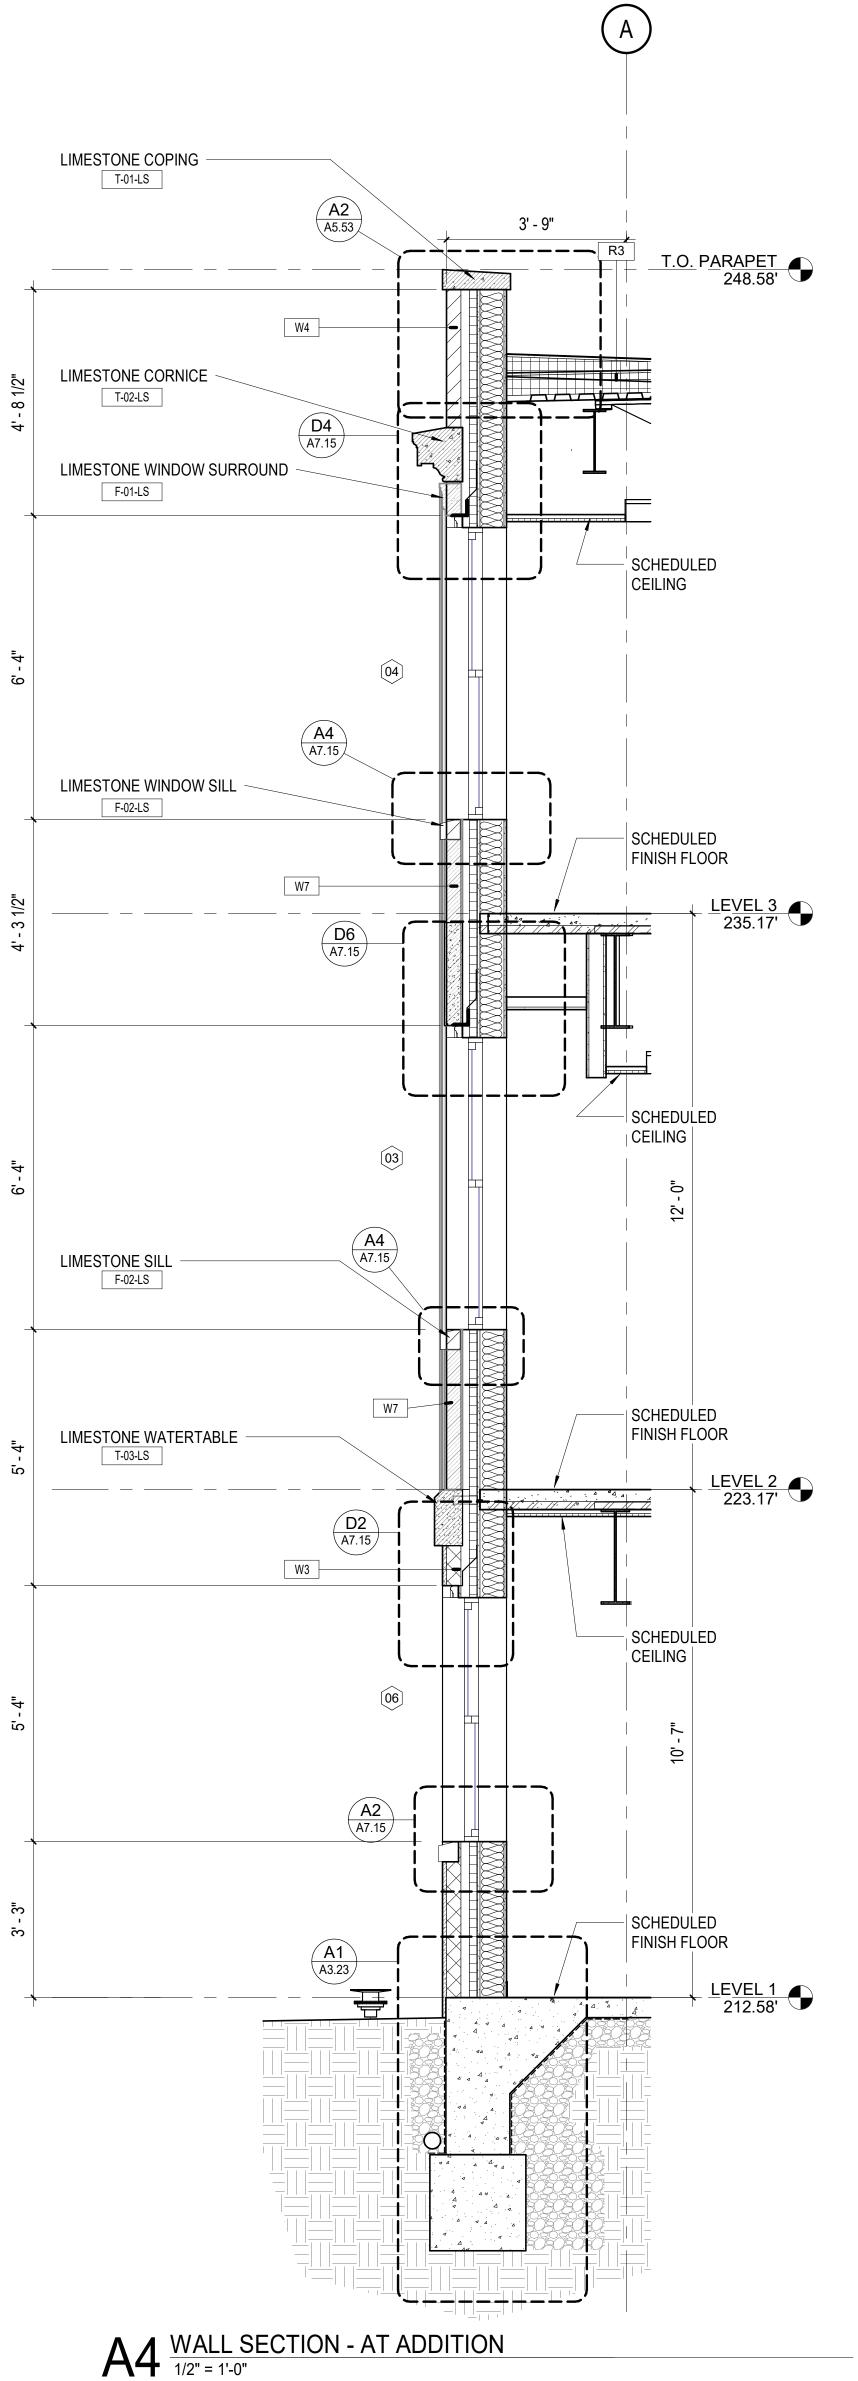

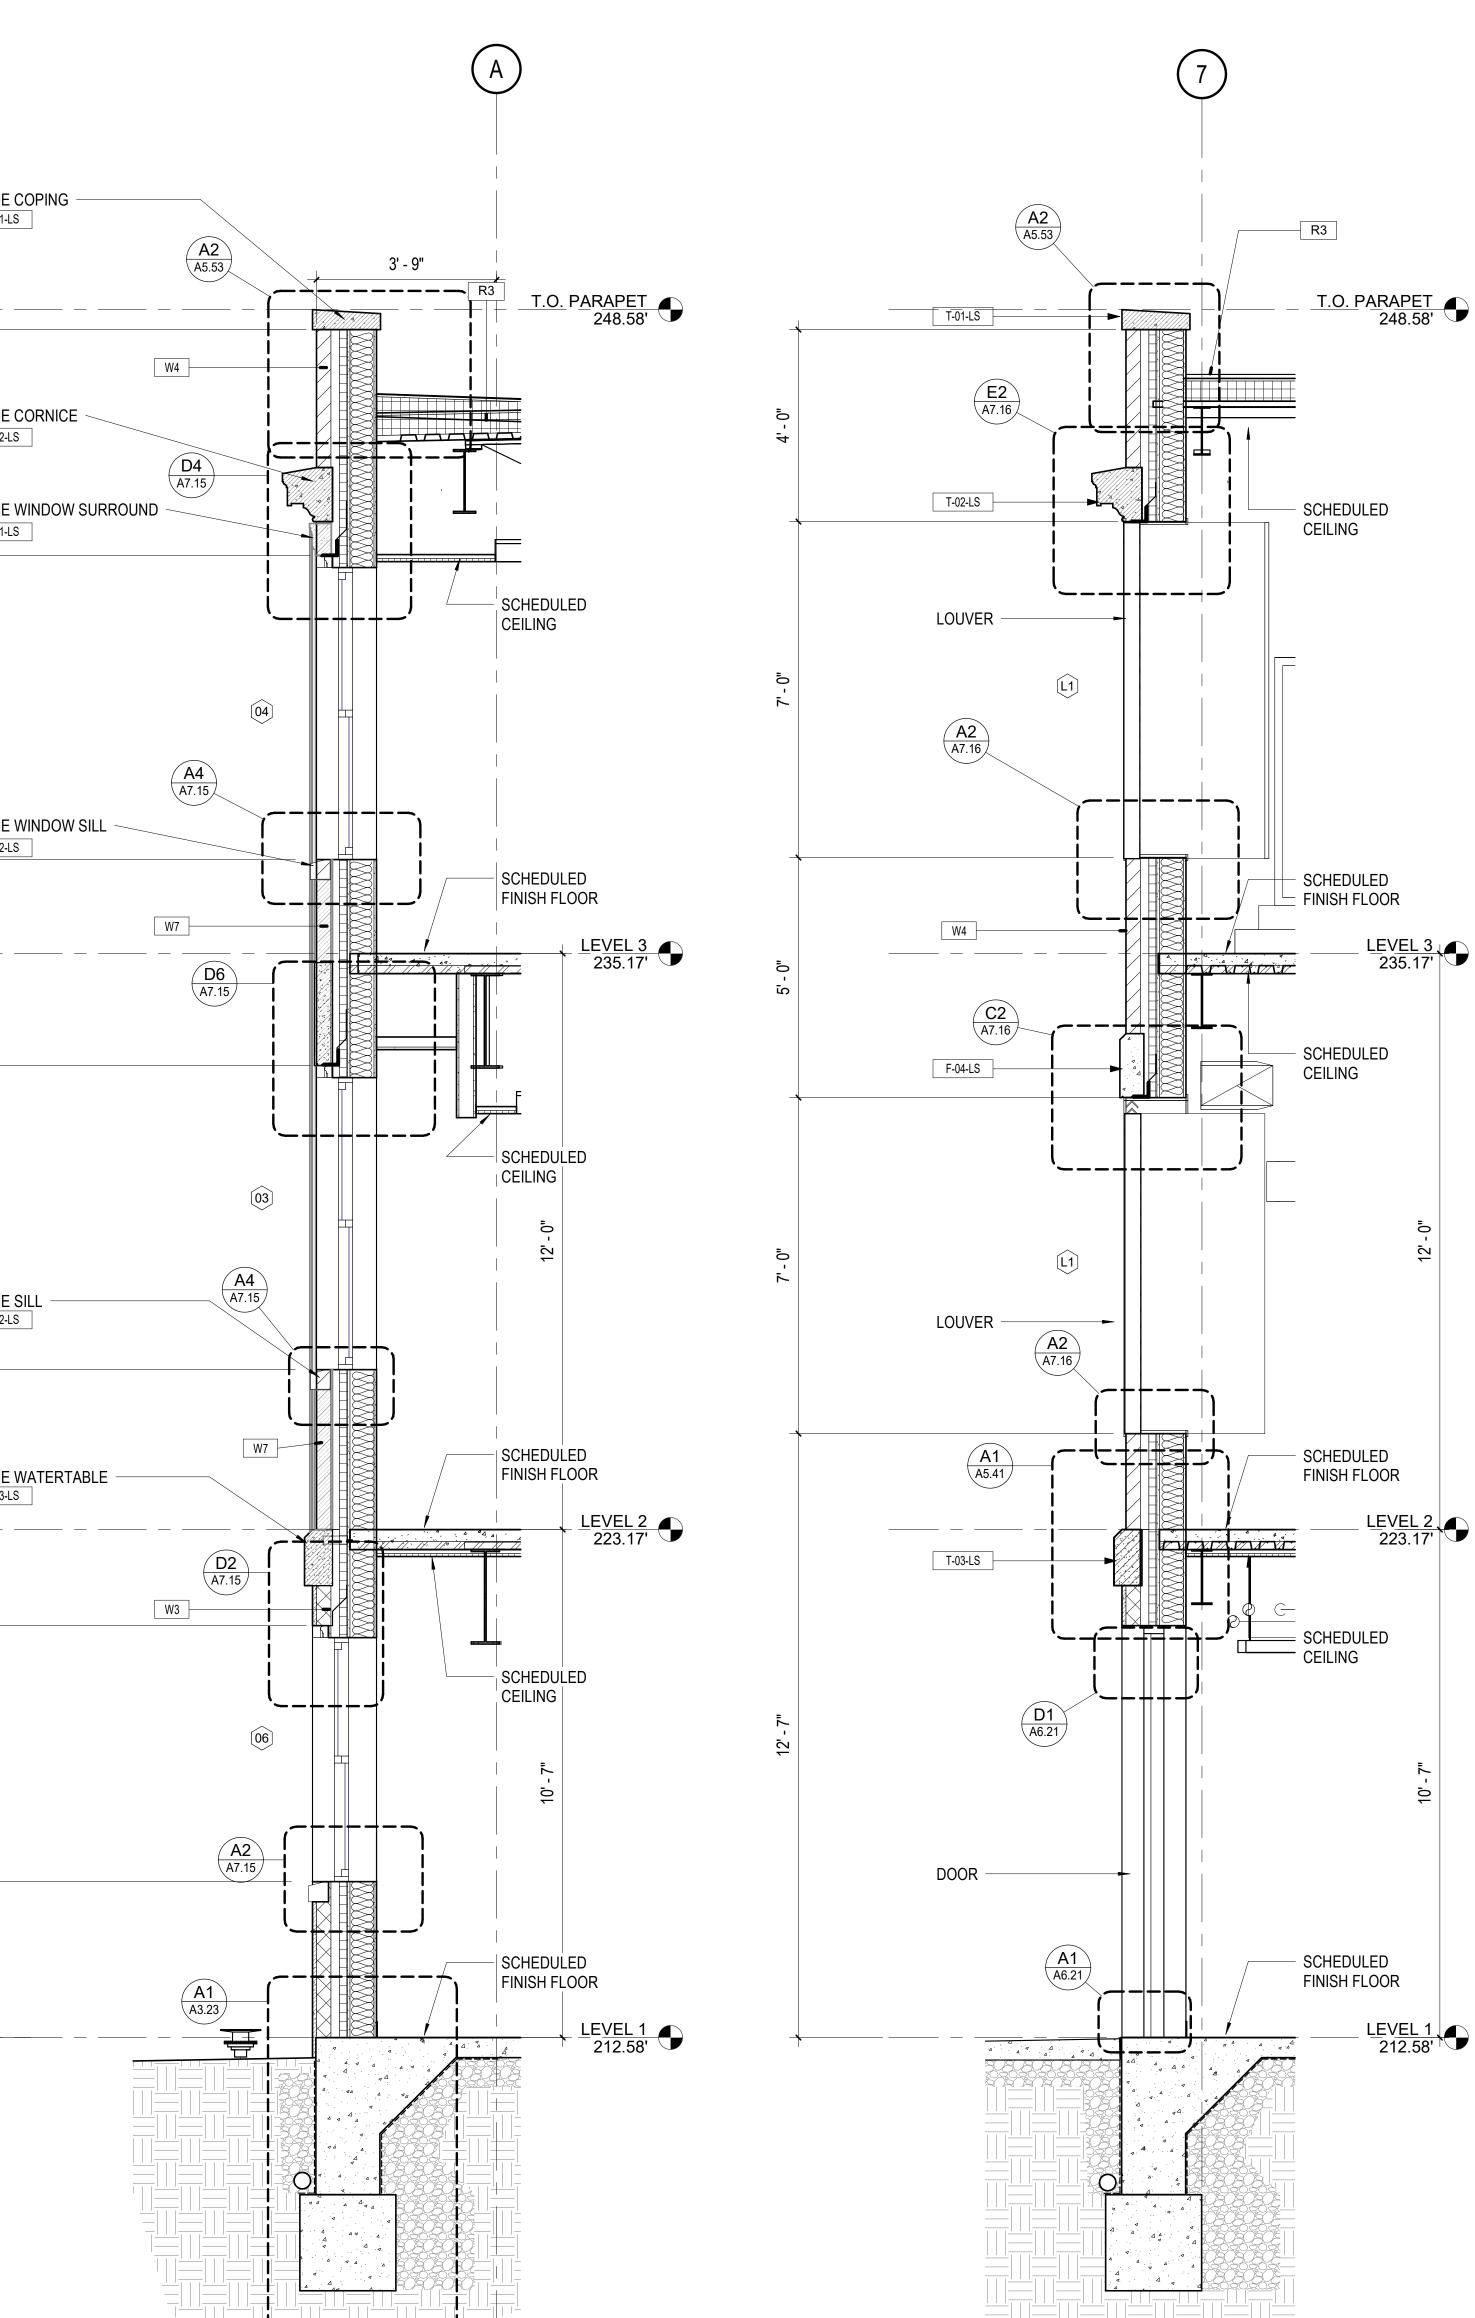

EXTERIOR ASSEMBLIES LEGEND

RE: SHEET A2.00 FOR TYPICAL EXTERIOR ASSEMBLIES CONSTRUCTION. RE: WALL SECTIONS FOR DETAILS AND ADDITIONAL INFORMATION.

2. RE: SHEET A7.11 FOR WINDOW SCHEDULE

W1 WALL TYPE 1:

EXISTING STUCCO (PATCH AND REPAIR AS NEEDED) / EXISTING CONCRETE WALL / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF CONCRETE BETWEEN 2-1/2" METAL STUD FRAMING

EXISTING STRUCTURAL BRICK MASONRY (PATCH AND REPAIR AS NEEDED) / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF BRICK BETWEEN 2-1/2" METAL STUD FRAMING

WALL TYPE 3:

LIME STUCCO / 4" NOM CMU / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT GYPSUM BOARD SHEATHING / 6" COLD-FORMED METAL FRAMING @ 16" O.C. W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD WALLS, TYPICAL. MATCH STUCCO BLOCK PATTERN TO EXISTING WEST FACADE.

W4

BRICK VENEER (RUNNING BOND) / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT GYPSUM BOARD SHEATHING / 6" COLD-FORMED METAL FRAMING @ 16" O.C. W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD WALLS, TYPICAL

INSULATION ON INTERIOR FACE OF CONCRETE BETWEEN 2-1/2"

W5

METAL STUD FRAMING WALL TYPE 6:

LIME STUCCO / CONCRETE WALL / OPEN CELL SPRAY FOAM

W6

EXISTING STONE PANEL (CLEAN AND REJOINT AS NEEDED) / STRUCTURAL BRICK MASONRY / OPEN CELL SPRAY FOAM INSULATION ON INTERIOR FACE OF BRICK BETWEEN 2-1/2" METAL STUD FRAMING

WALL TYPE 7:

STONE PANEL TO MATCH EXISTING / AIR CAVITY / 2" XPS INSULATION (R-5 PER INCH MIN) / WEATHER BARRIER / EXTERIOR GLASS MAT SHEATHING / 6" COLD FORMED METAL FRAMING @ 16" OC W/ CONTINUOUS SILL GASKETS INSTALLED AT EXTERIOR STUD WALLS, TYPICAL

1 EXTERIOR GLAZED OPENING TYPE -- RE: SHEET A7:11

MASONRY EXPANSION JOINT - MATCH BRICK COLOR; STUCCO MJ CONTROL JOINT, SIMILAR

LEVEL 3 235.17'

LEVEL 2 223.17'

LEVEL 1 212.58'


 $A2^{\frac{\text{WALL SECTION - AT ADDITION}}{1/2" = 1'-0"}}$

SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD ADHERED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING CONCRETE ROOF

ROOF TYPE 2: SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO POLYISO ROOF INSULATION (R-25 MIN) ON EXISTING WOOD DECKING.

ROOF TYPE 3:

SINGLE-PLY SMOOTH-BACKED MEMBRANE FULLY ADHERED TO 1/2" COVER BOARD MECHANICALLY ANCHORED TO POLYISO ROOF INSULATION (R-25 MIN) ON METAL ROOF DECKING

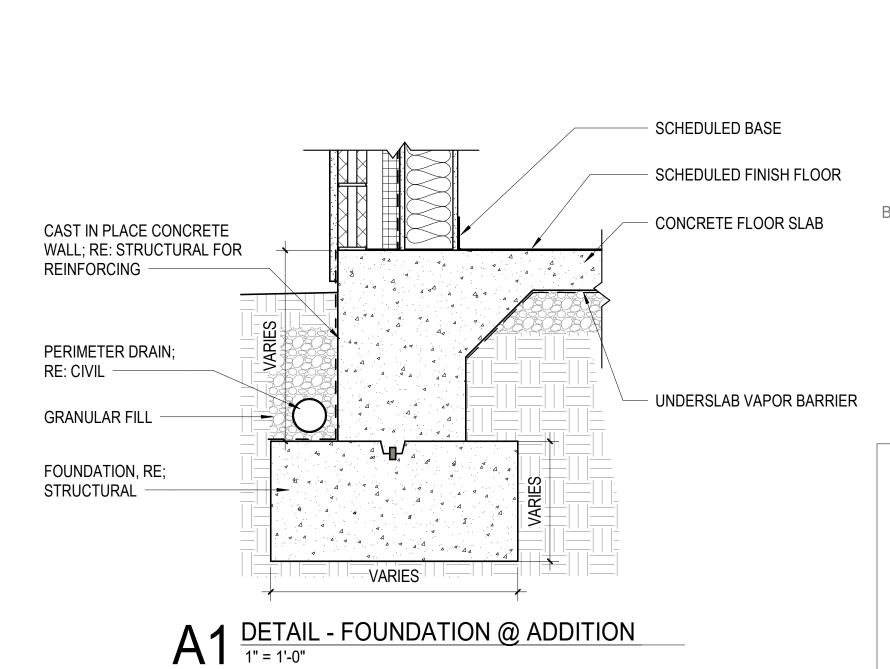


BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of

the Architect. Any use without the knowledge and written consent of the Architect is prohibited. The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs

and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract Documents.



Ē Z DDIT BR


> PROJECT STATUS **BID SET** SSUED SET: SSUE DATE: 30 JAN 24 REVISIONS No. Description

WALL SECTIONS

HECKED BY:

ROJECT NUMBER 236002-02

A3.23

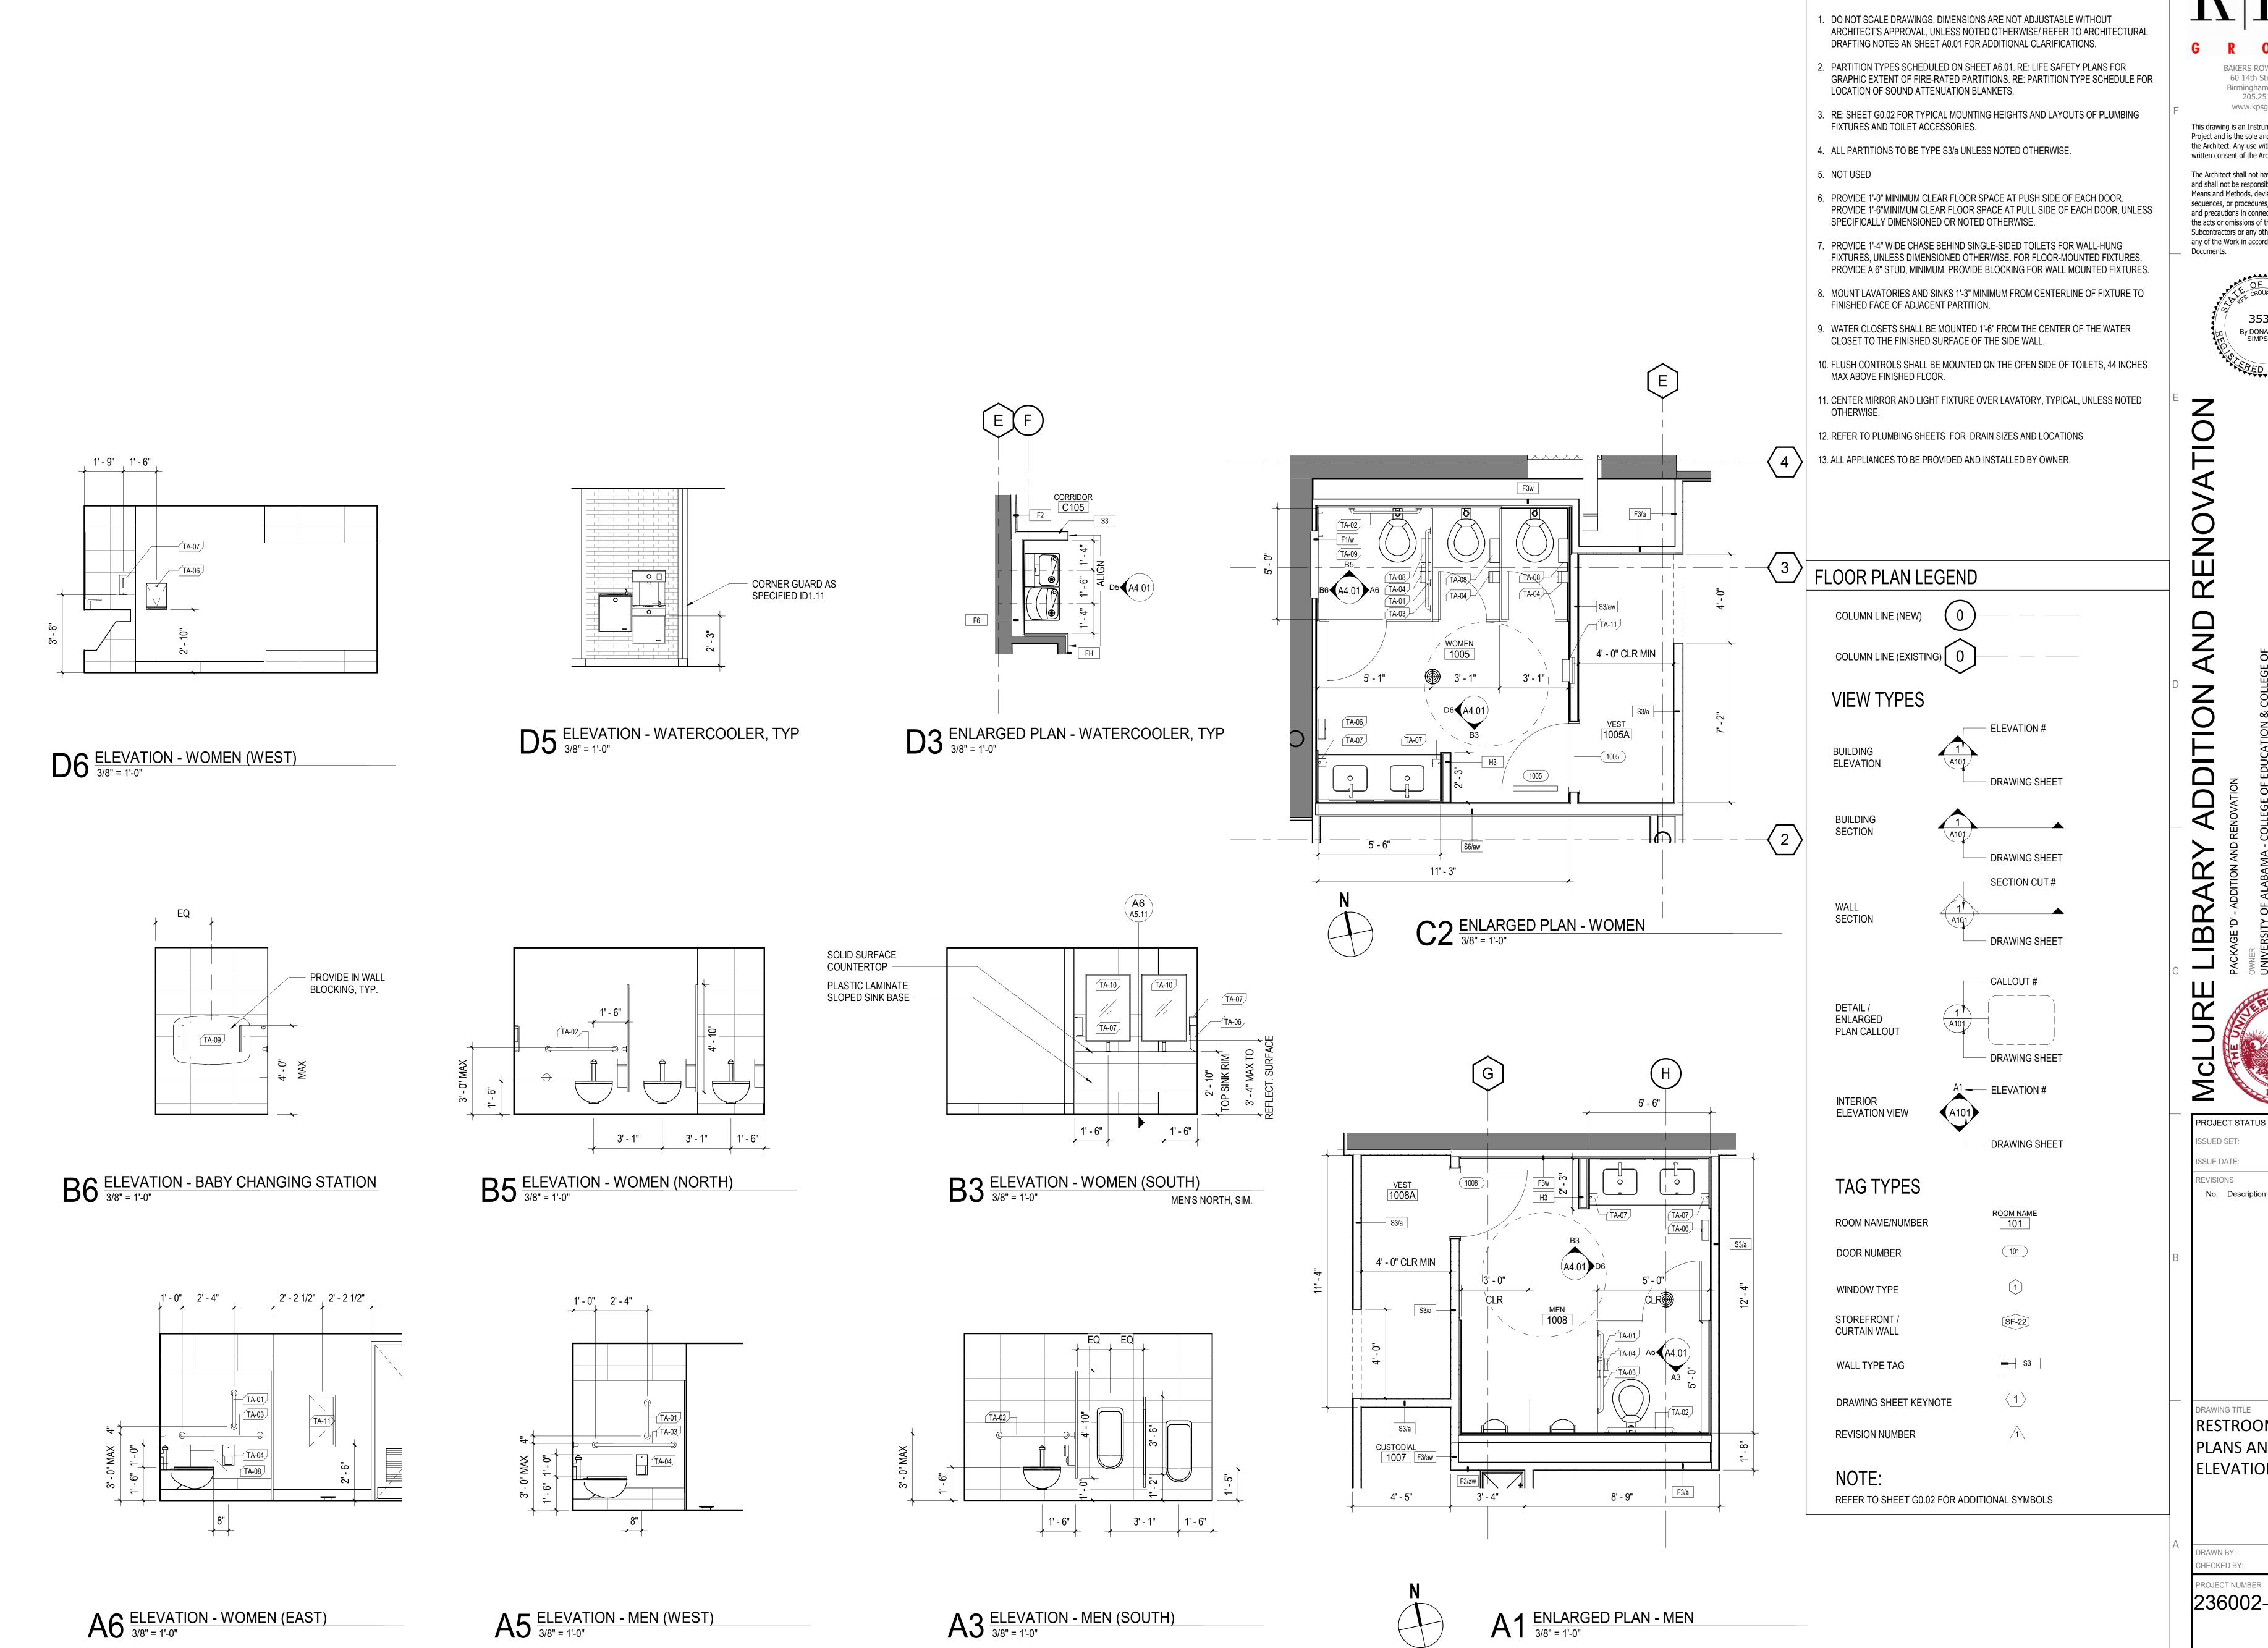

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125

www.kpsgroup.com This drawing is an Instrument of Service for this Project and is the sole and exclusive property of

the Architect. Any use without the knowledge and written consent of the Architect is prohibited. The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques,

sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



4 ADDITION IBRARY

PROJECT STATUS

BID SET

30 JAN 24


RESTROOM FLOOR

PLANS AND ELEVATIONS

HECKED BY:

ROJECT NUMBER 236002-02

A4.01

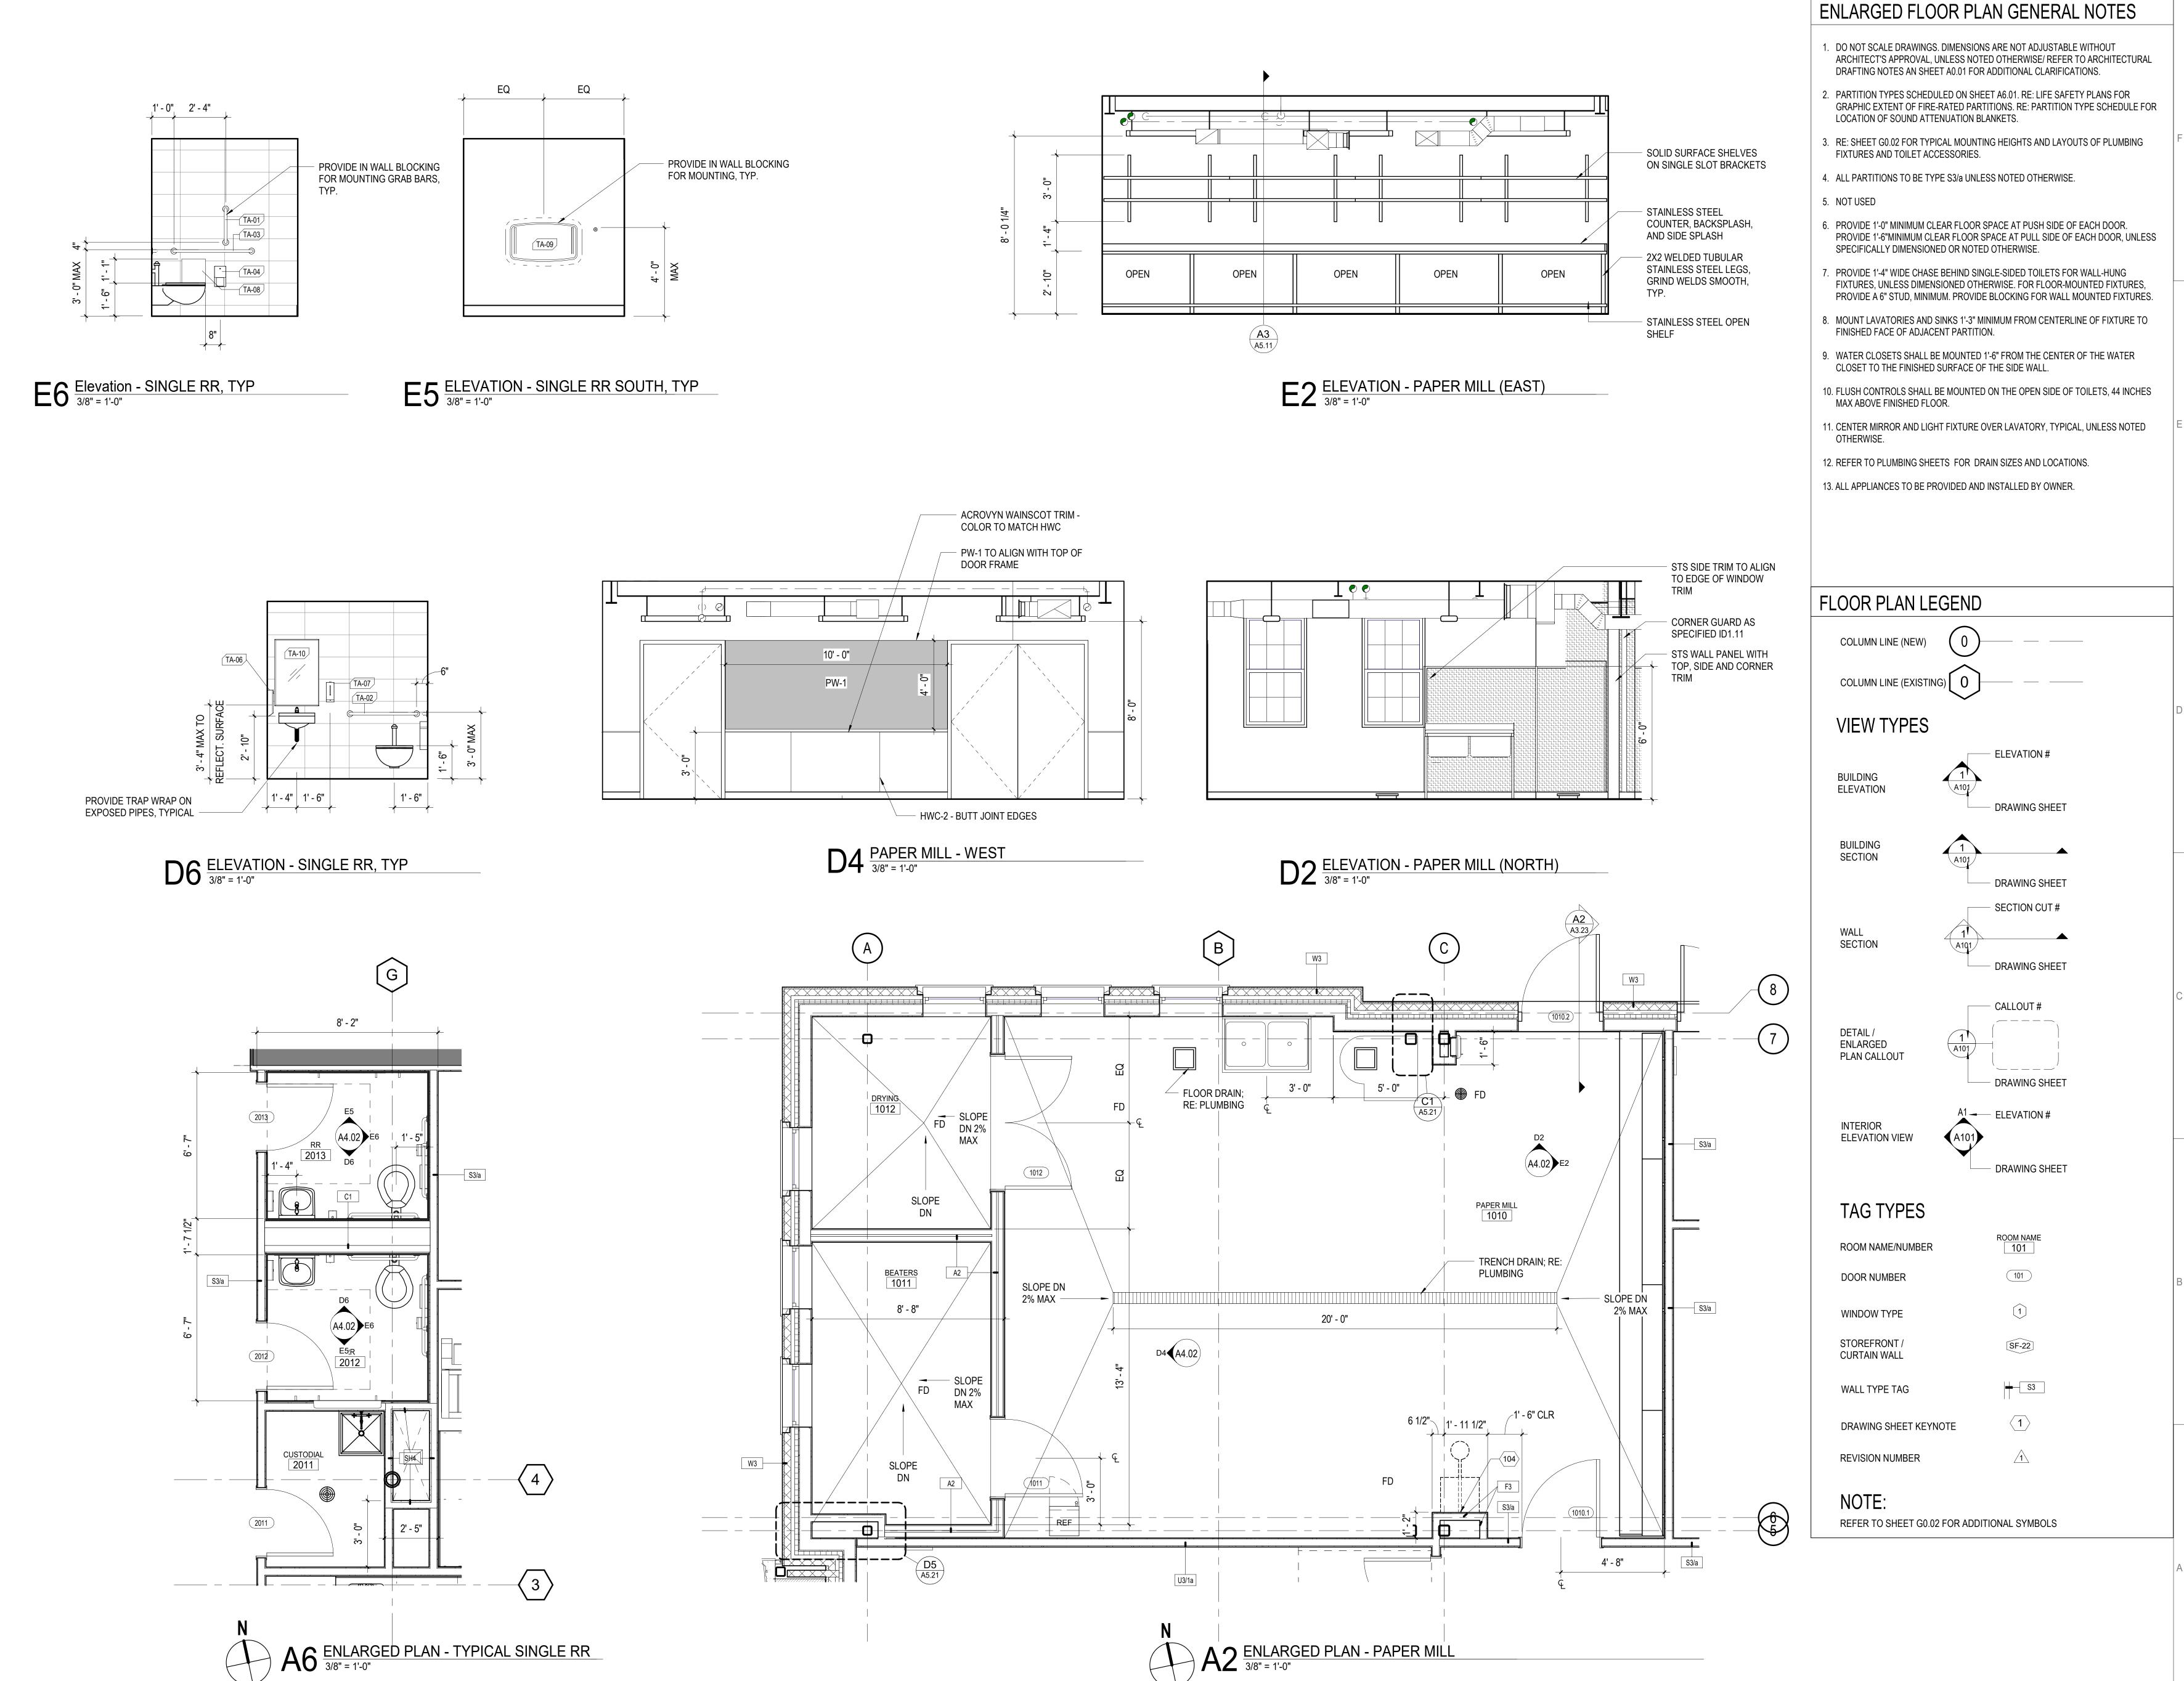


BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125

www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



NOL

NOVA **ADDITI** IBR.

PROJECT STATUS

SSUED SET:

ISSUE DATE:

REVISIONS

No. Description

BID SET


30 JAN 24

PAPER MILL AND RESTROOM FLOOR PLANS AND

HECKED BY:

ELEVATIONS

ROJECT NUMBER 236002-02

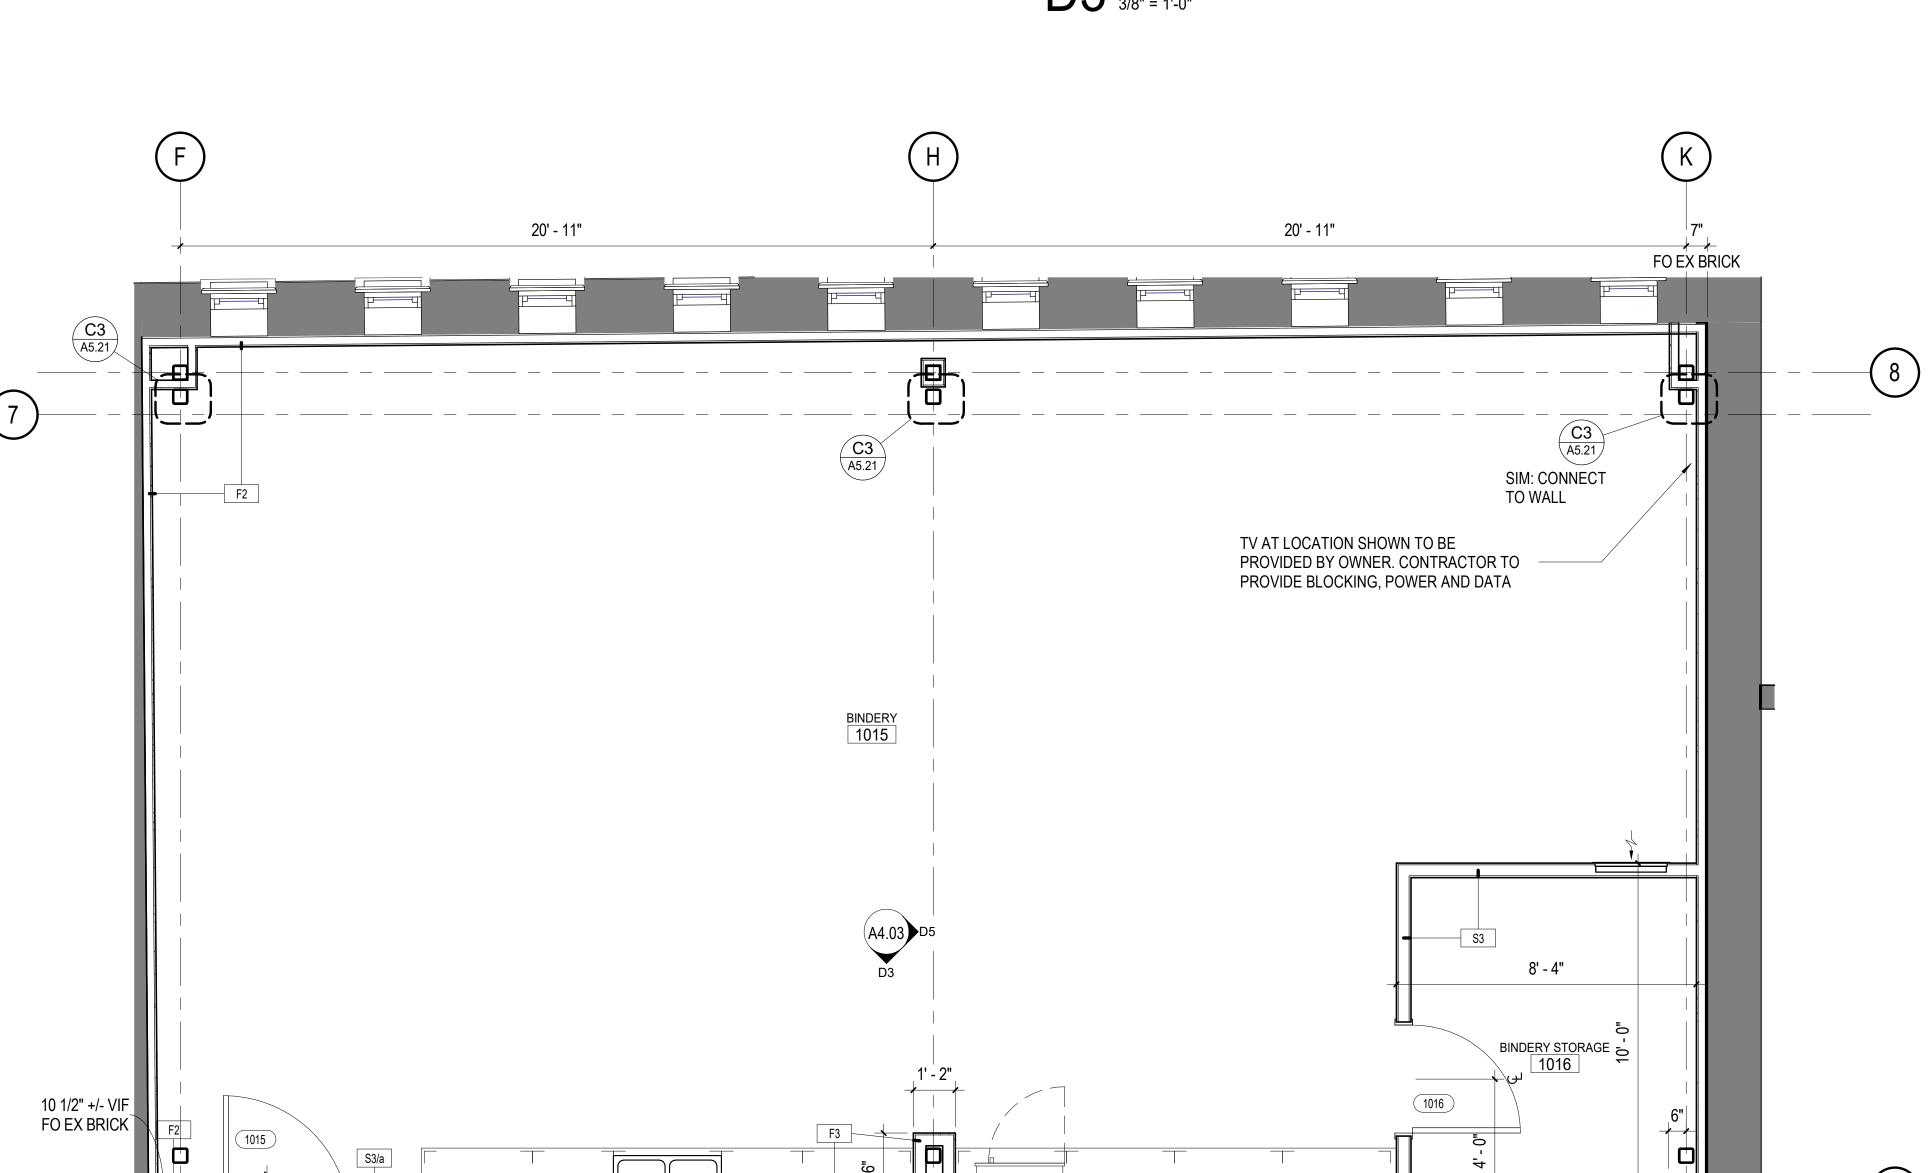

1. DO NOT SCALE DRAWINGS. DIMENSIONS ARE NOT ADJUSTABLE WITHOUT ARCHITECT'S APPROVAL, UNLESS NOTED OTHERWISE/ REFER TO ARCHITECTURAL DRAFTING NOTES AN SHEET A0.01 FOR ADDITIONAL CLARIFICATIONS.

2. PARTITION TYPES SCHEDULED ON SHEET A6.01. RE: LIFE SAFETY PLANS FOR GRAPHIC EXTENT OF FIRE-RATED PARTITIONS. RE: PARTITION TYPE SCHEDULE FOR

LOCATION OF SOUND ATTENUATION BLANKETS. 3. RE: SHEET G0.02 FOR TYPICAL MOUNTING HEIGHTS AND LAYOUTS OF PLUMBING

FIXTURES AND TOILET ACCESSORIES.

4. ALL PARTITIONS TO BE TYPE S3/a UNLESS NOTED OTHERWISE.

NOT USED

PLASTIC LAMINATE UPPER

SOLID SURFACE COUNTER

- PLASTIC LAMINATE BASE

CABINET

AND SPLASH

CABINETS

6. PROVIDE 1'-0" MINIMUM CLEAR FLOOR SPACE AT PUSH SIDE OF EACH DOOR. PROVIDE 1'-6"MINIMUM CLEAR FLOOR SPACE AT PULL SIDE OF EACH DOOR, UNLESS SPECIFICALLY DIMENSIONED OR NOTED OTHERWISE.

PROVIDE 1'-4" WIDE CHASE BEHIND SINGLE-SIDED TOILETS FOR WALL-HUNG FIXTURES, UNLESS DIMENSIONED OTHERWISE. FOR FLOOR-MOUNTED FIXTURES, PROVIDE A 6" STUD, MINIMUM. PROVIDE BLOCKING FOR WALL MOUNTED FIXTURES.

8. MOUNT LAVATORIES AND SINKS 1'-3" MINIMUM FROM CENTERLINE OF FIXTURE TO FINISHED FACE OF ADJACENT PARTITION.

9. WATER CLOSETS SHALL BE MOUNTED 1'-6" FROM THE CENTER OF THE WATER CLOSET TO THE FINISHED SURFACE OF THE SIDE WALL.

10. FLUSH CONTROLS SHALL BE MOUNTED ON THE OPEN SIDE OF TOILETS, 44 INCHES MAX ABOVE FINISHED FLOOR.


11. CENTER MIRROR AND LIGHT FIXTURE OVER LAVATORY, TYPICAL, UNLESS NOTED OTHERWISE.

12. REFER TO PLUMBING SHEETS FOR DRAIN SIZES AND LOCATIONS.


13. ALL APPLIANCES TO BE PROVIDED AND INSTALLED BY OWNER.

FLOOR PLAN LEGEND

COLUMN LINE (NEW) COLUMN LINE (EXISTING)

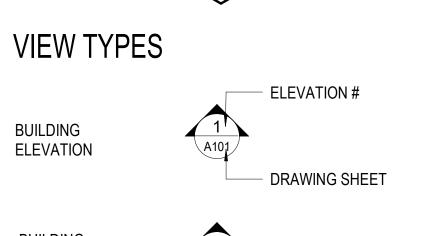


BUILDING SECTION

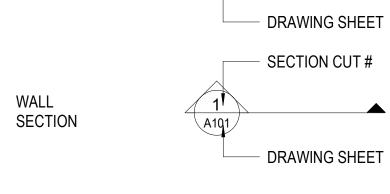

CALLOUT#

- DRAWING SHEET

DETAIL / ENLARGED PLAN CALLOUT

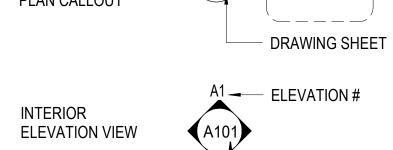

TAG TYPES

IAGTIPES	
ROOM NAME/NUMBER	ROOM NAME
DOOR NUMBER	101
WINDOW TYPE	
STOREFRONT / CURTAIN WALL	SF-22
WALL TYPE TAG	→ S3
DRAWING SHEET KEYNOTE	<u>\(1 \)</u>
REVISION NUMBER	<u></u>

NOTE:


REFER TO SHEET G0.02 FOR ADDITIONAL SYMBOLS

A3 ENLARGED PLAN - BINDERY LEVEL 1
3/8" = 1'-0"

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



ADDITION IBRARY


X

PROJECT STATUS SSUED SET: ISSUE DATE: 30 JAN 24 REVISIONS No. Description

BINDERY FLOOR PLANS AND ELEVATIONS

HECKED BY:


PROJECT NUMBER 236002-02

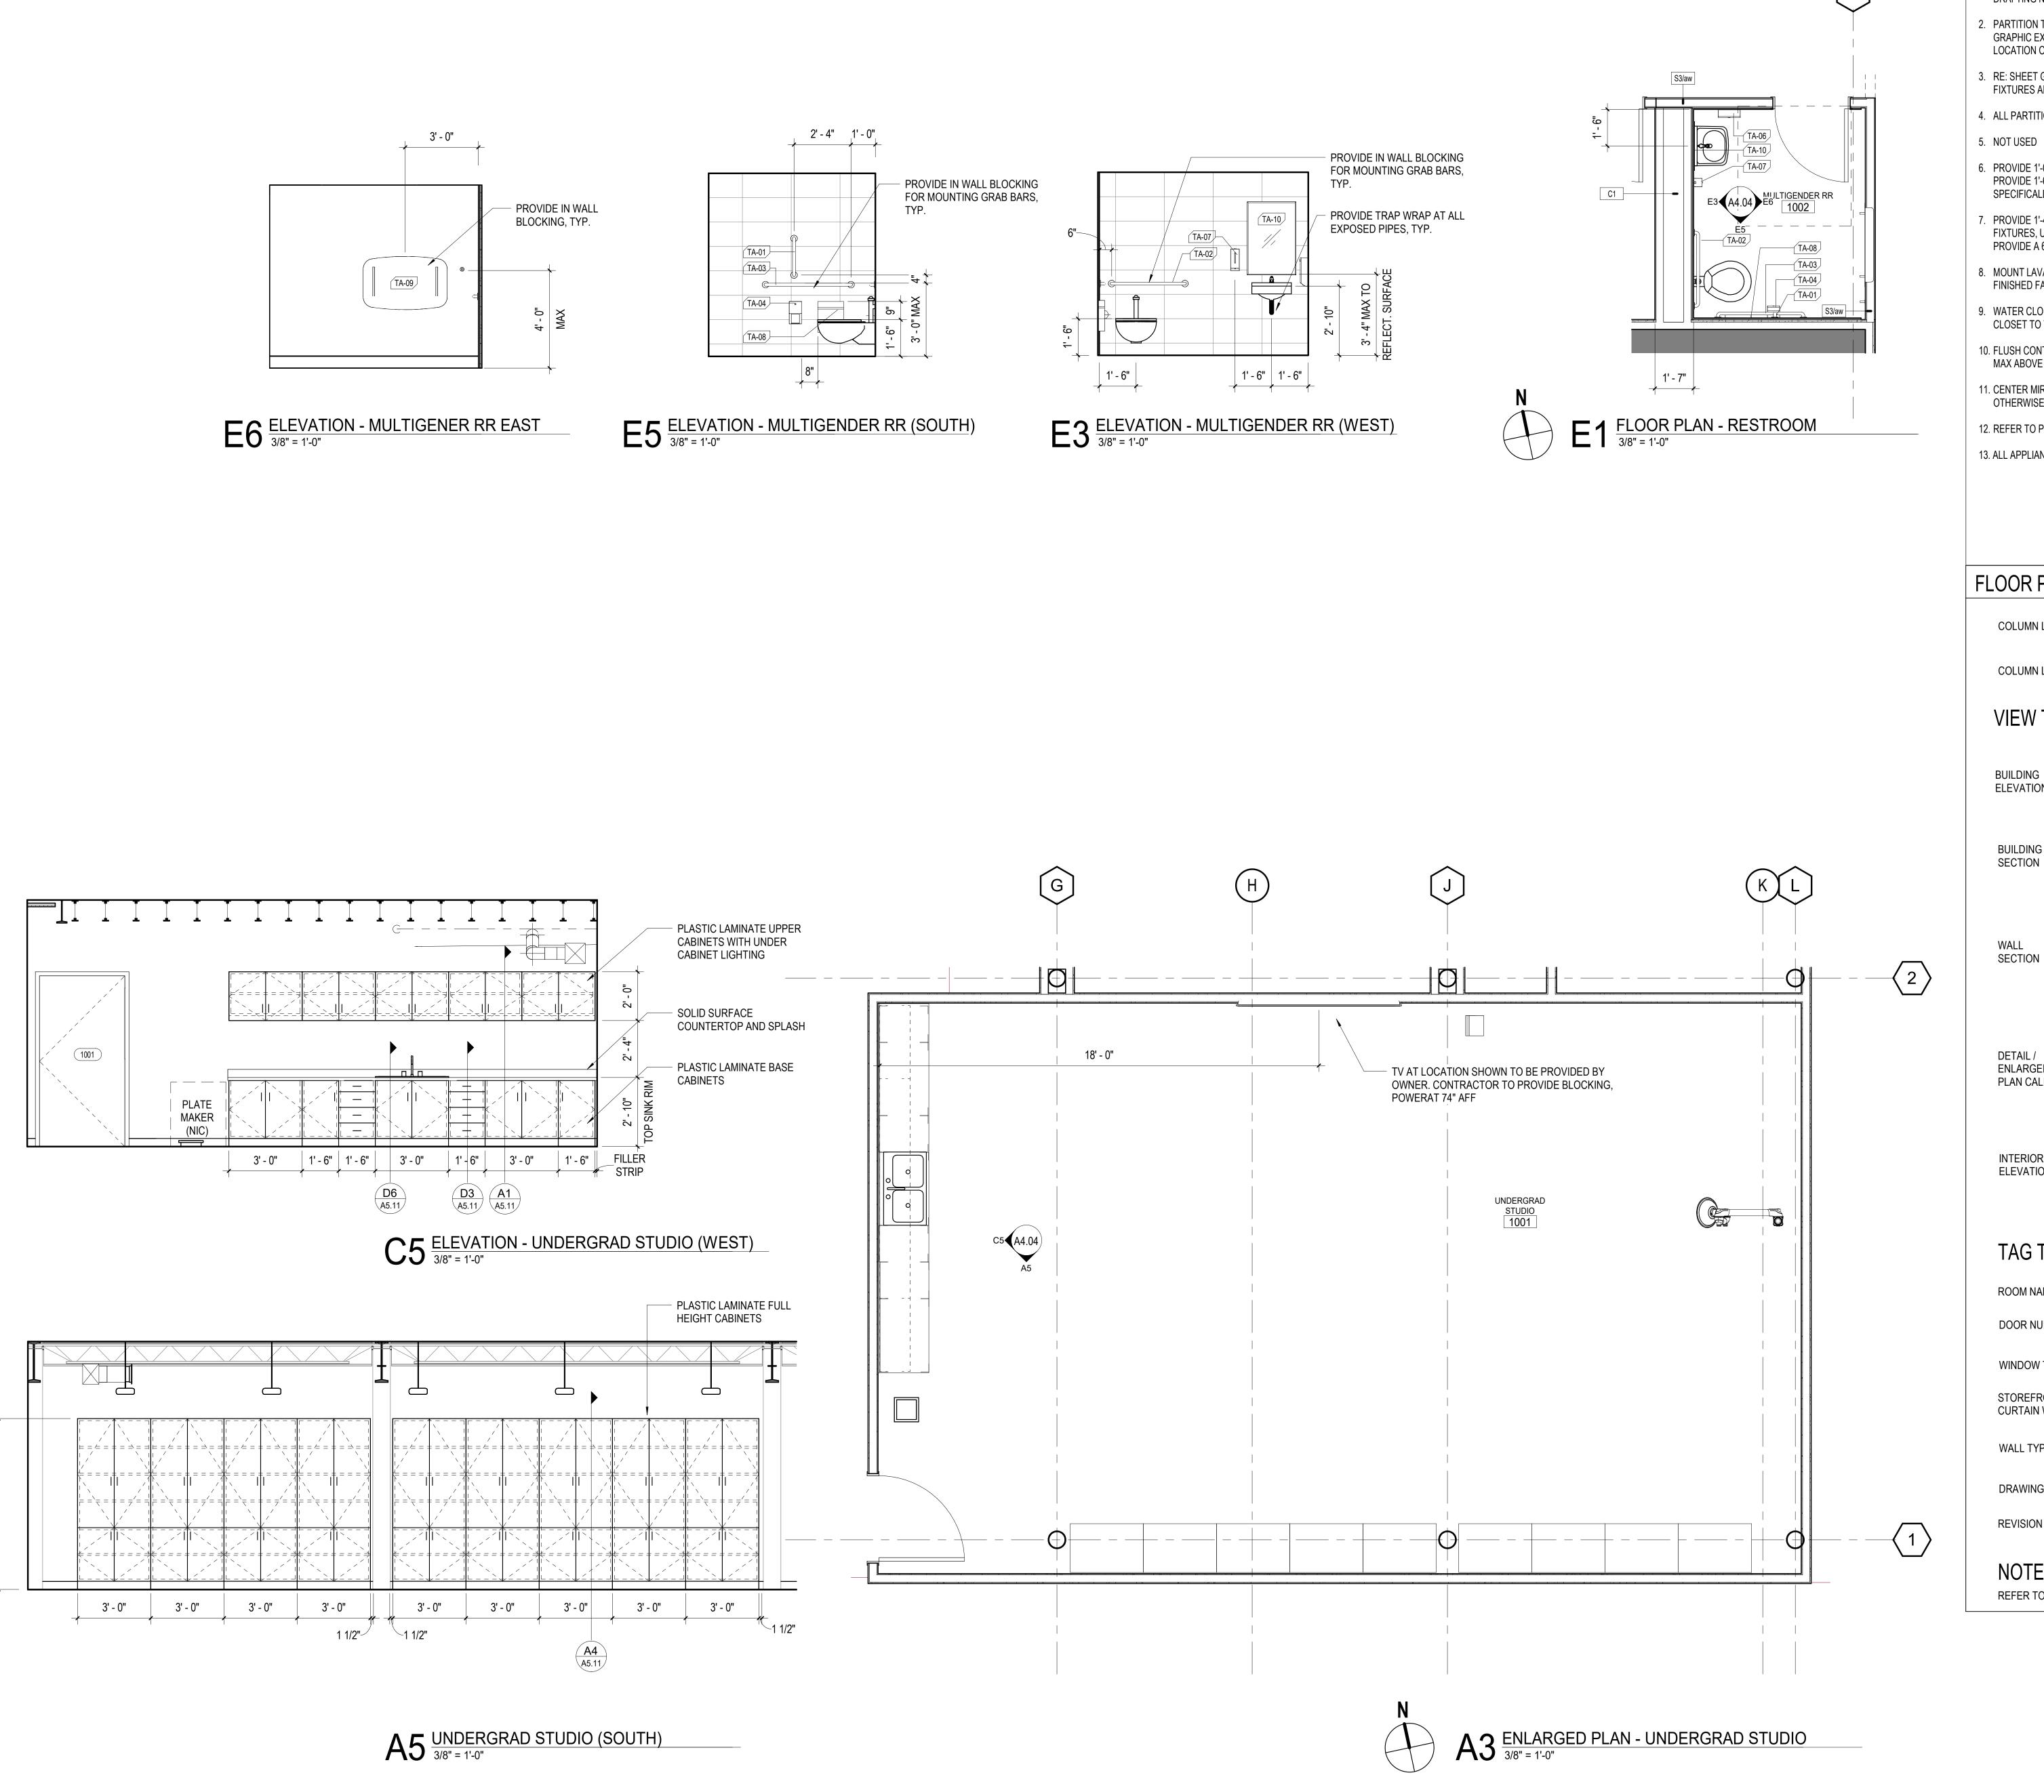


- 1. DO NOT SCALE DRAWINGS. DIMENSIONS ARE NOT ADJUSTABLE WITHOUT ARCHITECT'S APPROVAL, UNLESS NOTED OTHERWISE/ REFER TO ARCHITECTURAL DRAFTING NOTES AN SHEET A0.01 FOR ADDITIONAL CLARIFICATIONS.
- PARTITION TYPES SCHEDULED ON SHEET A6.01. RE: LIFE SAFETY PLANS FOR GRAPHIC EXTENT OF FIRE-RATED PARTITIONS. RE: PARTITION TYPE SCHEDULE FOR
- LOCATION OF SOUND ATTENUATION BLANKETS. 3. RE: SHEET G0.02 FOR TYPICAL MOUNTING HEIGHTS AND LAYOUTS OF PLUMBING
- FIXTURES AND TOILET ACCESSORIES.
- 4. ALL PARTITIONS TO BE TYPE S3/a UNLESS NOTED OTHERWISE.
- 6. PROVIDE 1'-0" MINIMUM CLEAR FLOOR SPACE AT PUSH SIDE OF EACH DOOR. PROVIDE 1'-6"MINIMUM CLEAR FLOOR SPACE AT PULL SIDE OF EACH DOOR, UNLESS SPECIFICALLY DIMENSIONED OR NOTED OTHERWISE.
- 7. PROVIDE 1'-4" WIDE CHASE BEHIND SINGLE-SIDED TOILETS FOR WALL-HUNG FIXTURES, UNLESS DIMENSIONED OTHERWISE. FOR FLOOR-MOUNTED FIXTURES, PROVIDE A 6" STUD, MINIMUM. PROVIDE BLOCKING FOR WALL MOUNTED FIXTURES.
- 8. MOUNT LAVATORIES AND SINKS 1'-3" MINIMUM FROM CENTERLINE OF FIXTURE TO FINISHED FACE OF ADJACENT PARTITION.
- 9. WATER CLOSETS SHALL BE MOUNTED 1'-6" FROM THE CENTER OF THE WATER CLOSET TO THE FINISHED SURFACE OF THE SIDE WALL.
- 10. FLUSH CONTROLS SHALL BE MOUNTED ON THE OPEN SIDE OF TOILETS, 44 INCHES MAX ABOVE FINISHED FLOOR.
- 11. CENTER MIRROR AND LIGHT FIXTURE OVER LAVATORY, TYPICAL, UNLESS NOTED
- OTHERWISE.
- 12. REFER TO PLUMBING SHEETS FOR DRAIN SIZES AND LOCATIONS.
- 13. ALL APPLIANCES TO BE PROVIDED AND INSTALLED BY OWNER.




COLUMN LINE (NEW)

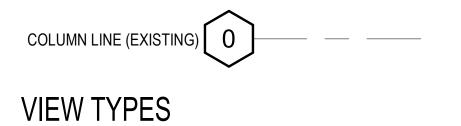


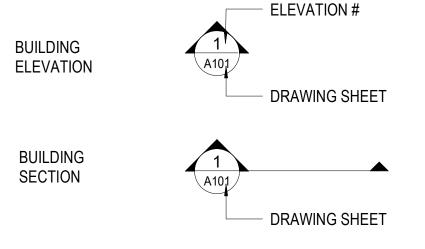



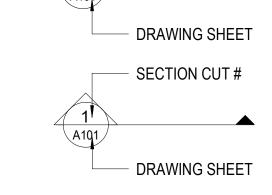

ENLARGED PLAN CALLOUT



A1 — ELEVATION #

- DRAWING SHEET

INTERIOR ELEVATION VIEW

TAG TYPES	
ROOM NAME/NUMBER	ROOM NAME
DOOR NUMBER	101
WINDOW TYPE	1
STOREFRONT / CURTAIN WALL	SF-22
WALL TYPE TAG	S3
DRAWING SHEET KEYNOTE	<u>(1)</u>
REVISION NUMBER	<u></u>


NOTE:


REFER TO SHEET G0.02 FOR ADDITIONAL SYMBOLS

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing





NOL

NOVA AND

PROJECT STATUS


SSUED SET: 30 JAN 24 ISSUE DATE: REVISIONS No. Description RAWING TITLE

STUDIO FLOOR PLANS AND ELEVATIONS


HECKED BY:

PROJECT NUMBER 236002-02

 $E_{3/8"=1'-0"}$

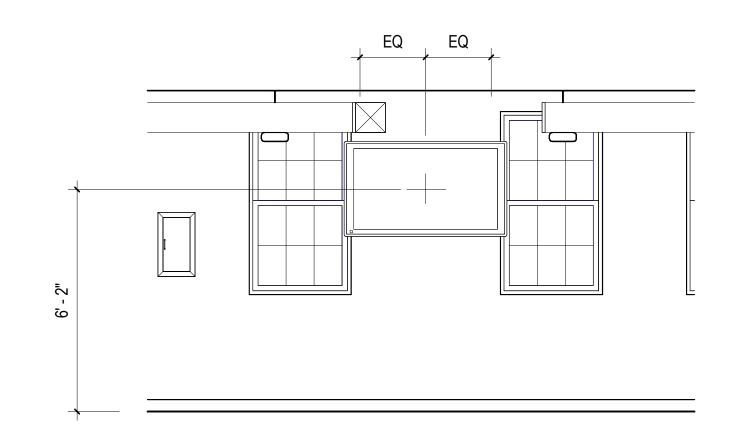

 $D6 = \frac{\text{ELEVATION - PRINT SHOP AND TYPE LAB (WEST)}}{3/8" = 1'-0"}$

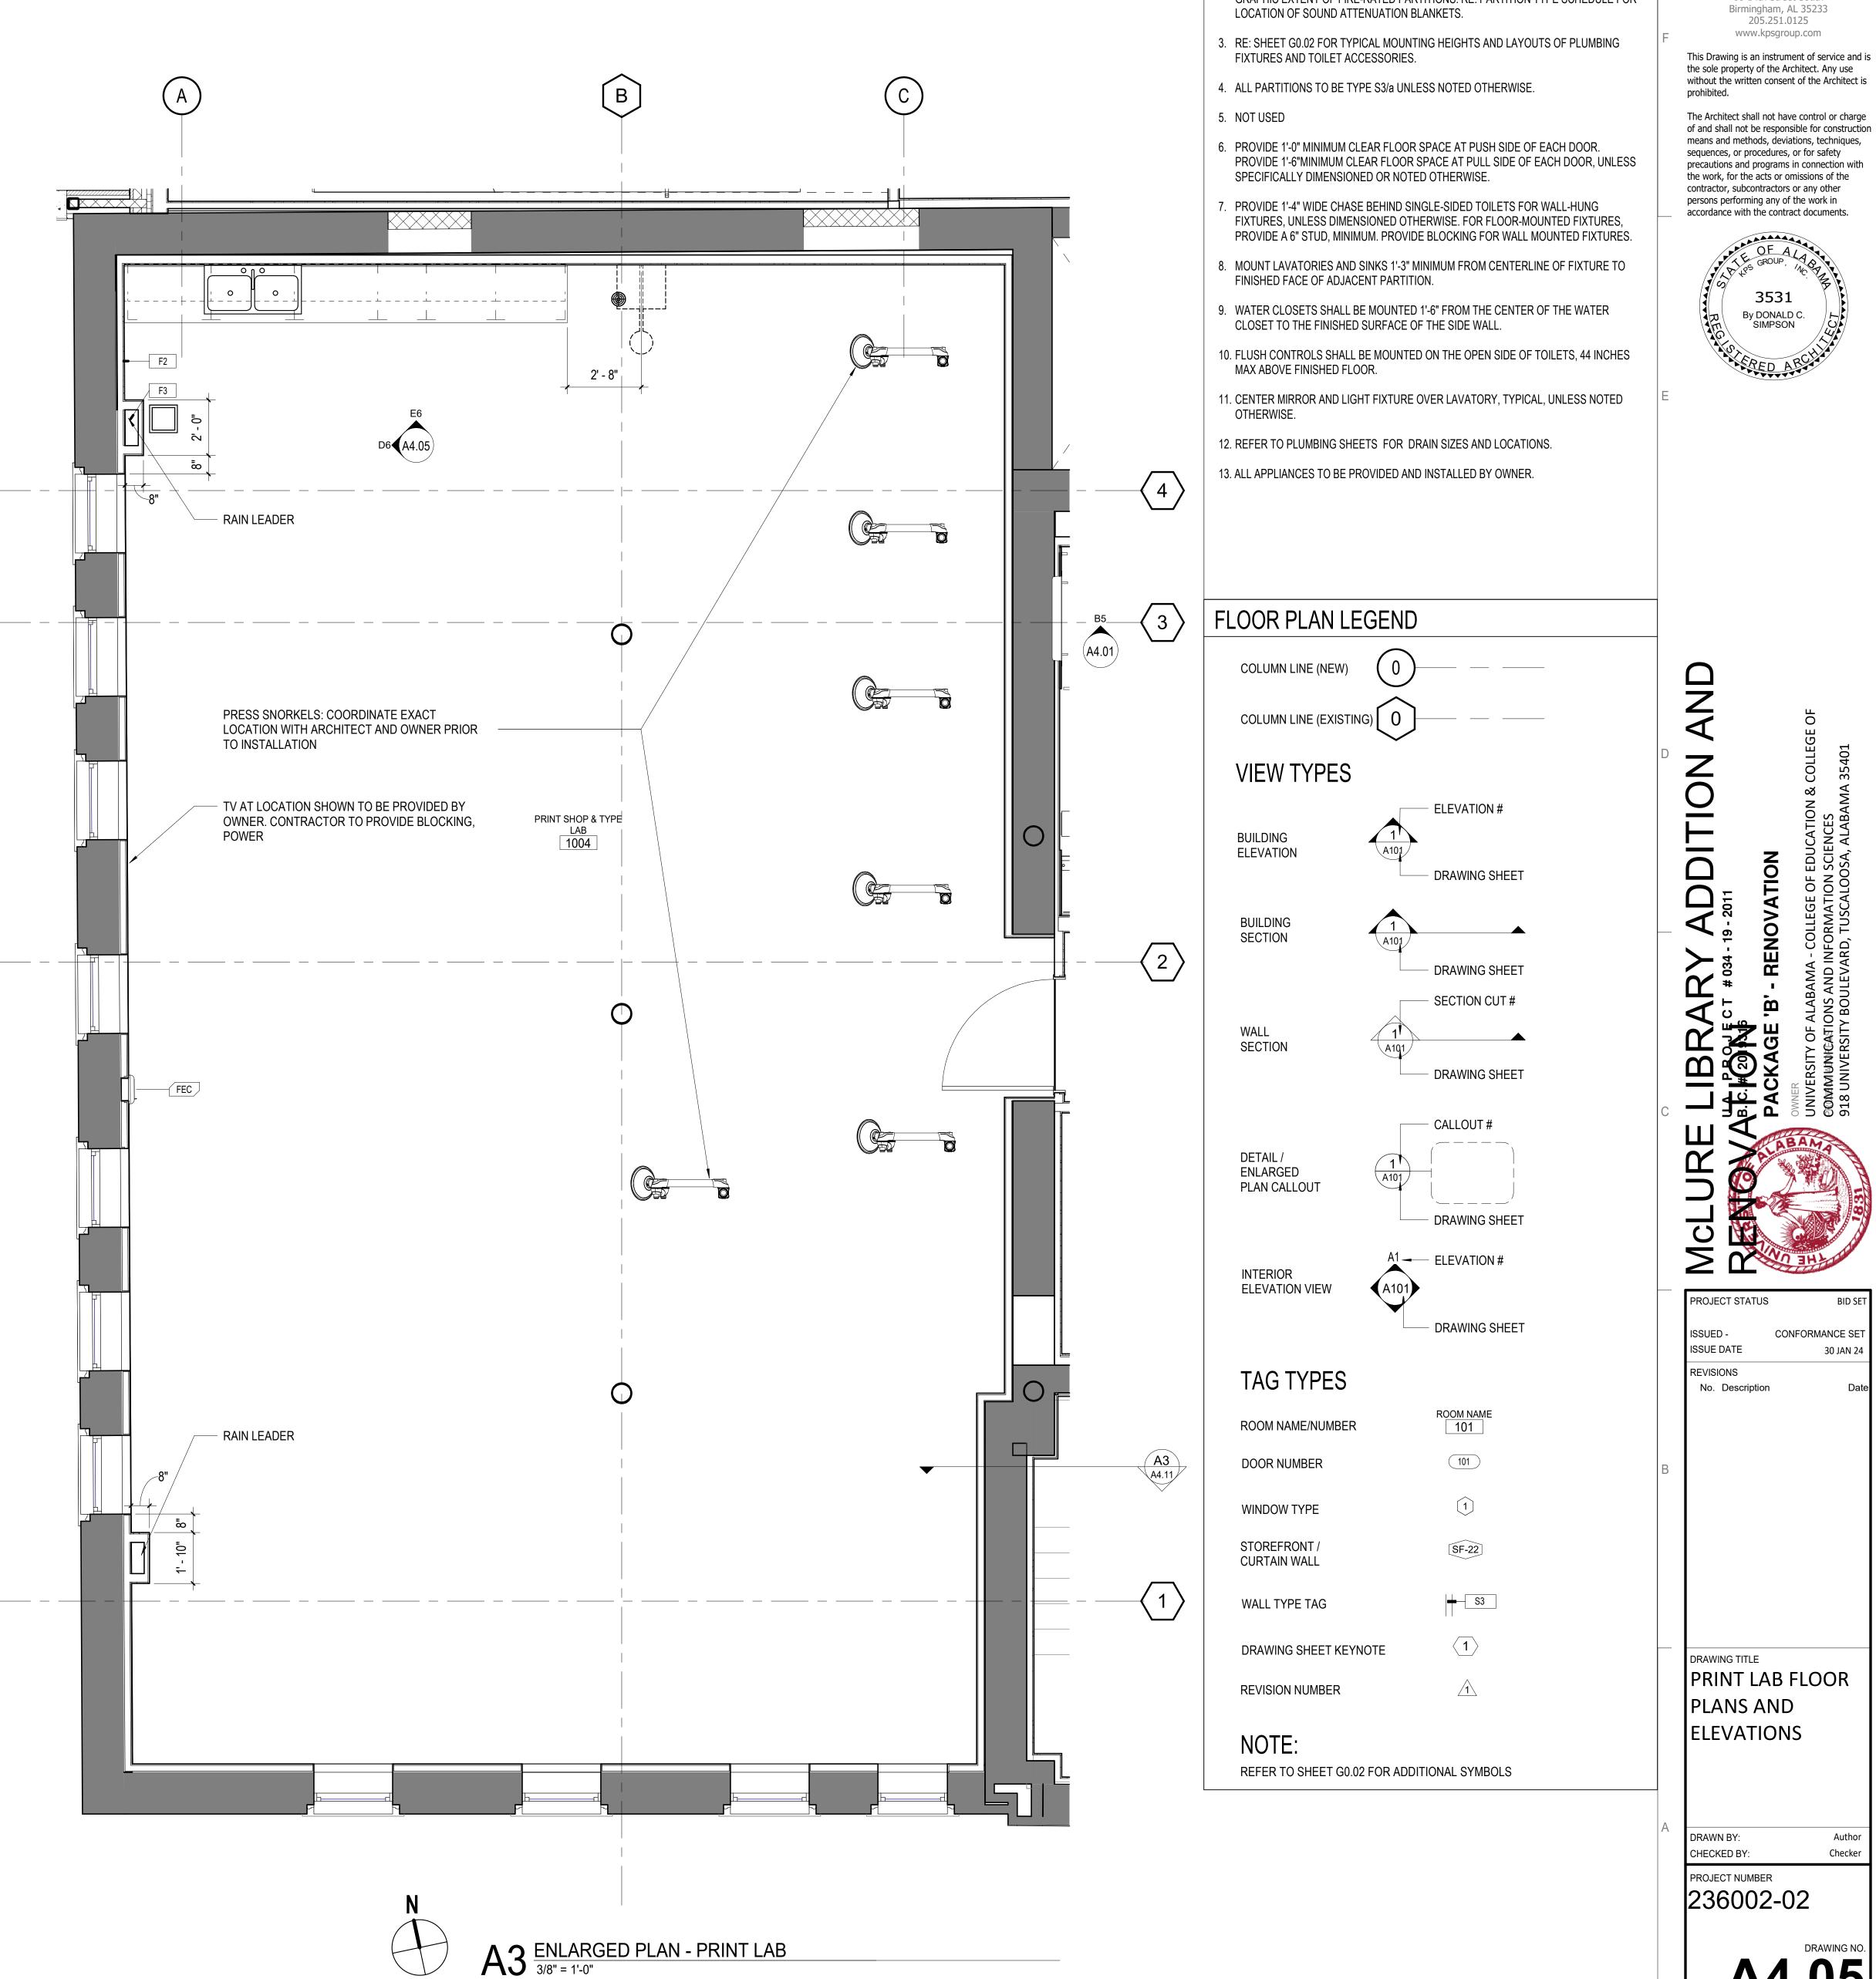

1. DO NOT SCALE DRAWINGS. DIMENSIONS ARE NOT ADJUSTABLE WITHOUT ARCHITECT'S APPROVAL, UNLESS NOTED OTHERWISE/ REFER TO ARCHITECTURAL DRAFTING NOTES AN SHEET A0.01 FOR ADDITIONAL CLARIFICATIONS.

2. PARTITION TYPES SCHEDULED ON SHEET A6.01. RE: LIFE SAFETY PLANS FOR GRAPHIC EXTENT OF FIRE-RATED PARTITIONS. RE: PARTITION TYPE SCHEDULE FOR

BAKERS ROW, Suite 100 60 14th Street South

Birmingham, AL 35233

205.251.0125 www.kpsgroup.com

3531

ELEVATIONS

CHECKED BY:

CONFORMANCE SET

30 JAN 24

- 1. DO NOT SCALE DRAWINGS. DIMENSIONS ARE NOT ADJUSTABLE WITHOUT ARCHITECT'S APPROVAL, UNLESS NOTED OTHERWISE/ REFER TO ARCHITECTURAL DRAFTING NOTES AN SHEET A0.01 FOR ADDITIONAL CLARIFICATIONS.
 - 2. PARTITION TYPES SCHEDULED ON SHEET A6.01. RE: LIFE SAFETY PLANS FOR GRAPHIC EXTENT OF FIRE-RATED PARTITIONS. RE: PARTITION TYPE SCHEDULE FOR LOCATION OF SOUND ATTENUATION BLANKETS.
 - 3. RE: SHEET G0.02 FOR TYPICAL MOUNTING HEIGHTS AND LAYOUTS OF PLUMBING FIXTURES AND TOILET ACCESSORIES.
 - 4. ALL PARTITIONS TO BE TYPE S3/a UNLESS NOTED OTHERWISE.
 - 5. NOT USED
 - 6. PROVIDE 1'-0" MINIMUM CLEAR FLOOR SPACE AT PUSH SIDE OF EACH DOOR. PROVIDE 1'-6"MINIMUM CLEAR FLOOR SPACE AT PULL SIDE OF EACH DOOR, UNLESS SPECIFICALLY DIMENSIONED OR NOTED OTHERWISE.
 - 7. PROVIDE 1'-4" WIDE CHASE BEHIND SINGLE-SIDED TOILETS FOR WALL-HUNG FIXTURES, UNLESS DIMENSIONED OTHERWISE. FOR FLOOR-MOUNTED FIXTURES, PROVIDE A 6" STUD, MINIMUM. PROVIDE BLOCKING FOR WALL MOUNTED FIXTURES.
 - 8. MOUNT LAVATORIES AND SINKS 1'-3" MINIMUM FROM CENTERLINE OF FIXTURE TO FINISHED FACE OF ADJACENT PARTITION.
 - 9. WATER CLOSETS SHALL BE MOUNTED 1'-6" FROM THE CENTER OF THE WATER CLOSET TO THE FINISHED SURFACE OF THE SIDE WALL.
 - 10. FLUSH CONTROLS SHALL BE MOUNTED ON THE OPEN SIDE OF TOILETS, 44 INCHES MAX ABOVE FINISHED FLOOR.
 - 11. CENTER MIRROR AND LIGHT FIXTURE OVER LAVATORY, TYPICAL, UNLESS NOTED OTHERWISE.
 - 12. REFER TO PLUMBING SHEETS FOR DRAIN SIZES AND LOCATIONS.
- 13. ALL APPLIANCES TO BE PROVIDED AND INSTALLED BY OWNER.

FLOOR PLAN LEGEND


COLUMN LINE (NEW)

COLUMN LINE (EXISTING)


O


————

VIEW TYPES

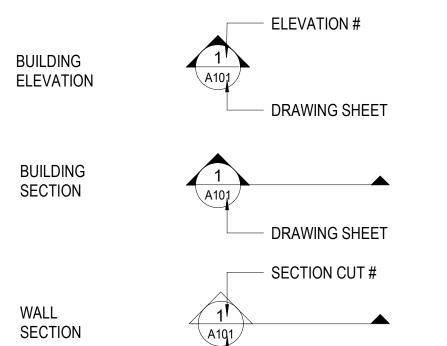

- DRAWING SHEET

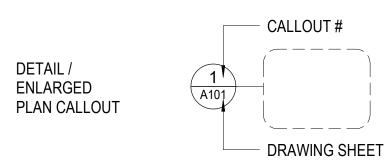

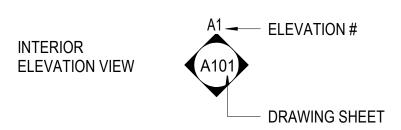

TAG TYPES

ROOM NAME/NUMBER	ROOM NAME
DOOR NUMBER	101
WINDOW TYPE	1
STOREFRONT / CURTAIN WALL	SF-22
WALL TYPE TAG	S3
DRAWING SHEET KEYNOTE	1
REVISION NUMBER	<u></u>

NOTE:

REFER TO SHEET G0.02 FOR ADDITIONAL SYMBOLS


G R O U

BAKERS ROW, Suite 100

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



ADDITION AND RENOVATION

ENOVATION

RMATION SCIENCES

RMATION SCIENCES

OWNER

OWNER

OWNER

UNIVERSITY OF ALABAMA - COLLEGE OF

COMMUNICATIONS AND INFORMATION

DCM No. 2023453

PROJECT ADDRESS

IBR.

PROJECT STATUS

ISSUED SET:

BID SET

REVISIONS
No. Description Date

DRAWING TITLE

RECEPTION AND BREAK ROOM FLOOR PLANS AND ELEVATIONS

DRAWN BY:
CHECKED BY:

PROJECT NUMBER 236002-02

A4.06

APPLIANCE LEGEND


TAG	APPLIANCE	MANUFACTURER	MODEL	PLUMBED	FURNISHED/IN STALLED
AP-01	REFRIGERATOR - 36" FRENCH DOOR	GE	GNE27JYMFS	YES	CF/CI
AP-02	MICROWAVE	GE	PES7227SLSS		CF/CI
AP-03	DISHWASHER	GE	GDT226SSLSS	YES	CF/CI
AP-04	COFFEE	TBD	TBD	YES	OF/CI

ENLARGED FLOOR PLAN GENERAL NOTES

- DO NOT SCALE DRAWINGS. DIMENSIONS ARE NOT ADJUSTABLE WITHOUT ARCHITECT'S APPROVAL, UNLESS NOTED OTHERWISE/ REFER TO ARCHITECTURAL DRAFTING NOTES AN SHEET A0.01 FOR ADDITIONAL CLARIFICATIONS.
 - PARTITION TYPES SCHEDULED ON SHEET A6.01. RE: LIFE SAFETY PLANS FOR GRAPHIC EXTENT OF FIRE-RATED PARTITIONS. RE: PARTITION TYPE SCHEDULE FOR LOCATION OF SOUND ATTENUATION BLANKETS.
 - RE: SHEET G0.02 FOR TYPICAL MOUNTING HEIGHTS AND LAYOUTS OF PLUMBING FIXTURES AND TOILET ACCESSORIES.
- 4. ALL PARTITIONS TO BE TYPE S3/a UNLESS NOTED OTHERWISE.
- NOT USED
- 6. PROVIDE 1'-0" MINIMUM CLEAR FLOOR SPACE AT PUSH SIDE OF EACH DOOR. PROVIDE 1'-6"MINIMUM CLEAR FLOOR SPACE AT PULL SIDE OF EACH DOOR, UNLESS SPECIFICALLY DIMENSIONED OR NOTED OTHERWISE.
- PROVIDE 1'-4" WIDE CHASE BEHIND SINGLE-SIDED TOILETS FOR WALL-HUNG FIXTURES, UNLESS DIMENSIONED OTHERWISE. FOR FLOOR-MOUNTED FIXTURES, PROVIDE A 6" STUD, MINIMUM. PROVIDE BLOCKING FOR WALL MOUNTED FIXTURES.
- 8. MOUNT LAVATORIES AND SINKS 1'-3" MINIMUM FROM CENTERLINE OF FIXTURE TO FINISHED FACE OF ADJACENT PARTITION.
- 9. WATER CLOSETS SHALL BE MOUNTED 1'-6" FROM THE CENTER OF THE WATER CLOSET TO THE FINISHED SURFACE OF THE SIDE WALL.
- 10. FLUSH CONTROLS SHALL BE MOUNTED ON THE OPEN SIDE OF TOILETS, 44 INCHES MAX ABOVE FINISHED FLOOR.
- 11. CENTER MIRROR AND LIGHT FIXTURE OVER LAVATORY, TYPICAL, UNLESS NOTED OTHERWISE.
- 12. REFER TO PLUMBING SHEETS FOR DRAIN SIZES AND LOCATIONS.
- 13. ALL APPLIANCES TO BE PROVIDED AND INSTALLED BY OWNER.



COLUMN LINE (NEW) COLUMN LINE (EXISTING)

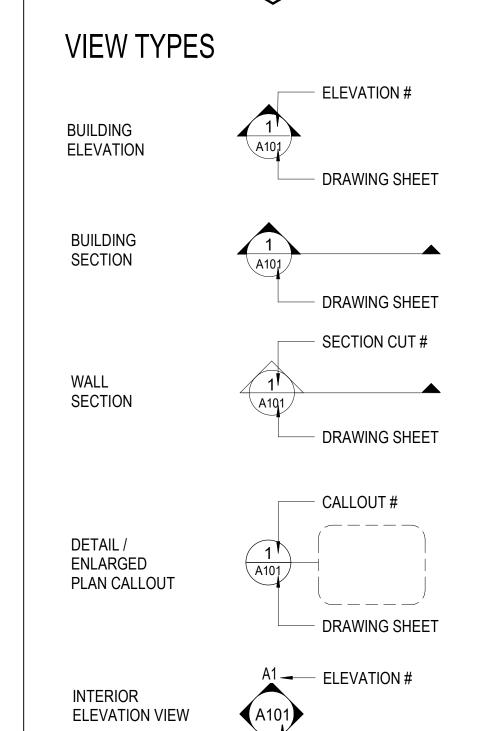

TAG TYPES	
ROOM NAME/NUMBER	ROOM NAME
DOOR NUMBER	101
WINDOW TYPE	
STOREFRONT / CURTAIN WALL	SF-22
WALL TYPE TAG	S 3
DRAWING SHEET KEYNOTE	1
REVISION NUMBER	1

DRAWING SHEET


NOTE:

REFER TO SHEET G0.02 FOR ADDITIONAL SYMBOLS

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

> This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

> > The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



NOL

RENOVA AND

PROJECT STATUS SSUED SET:


ISSUE DATE: REVISIONS No. Description


BREAK ROOM

FLOOR PLANS AND ELEVATIONS

HECKED BY:

ROJECT NUMBER 236002-02

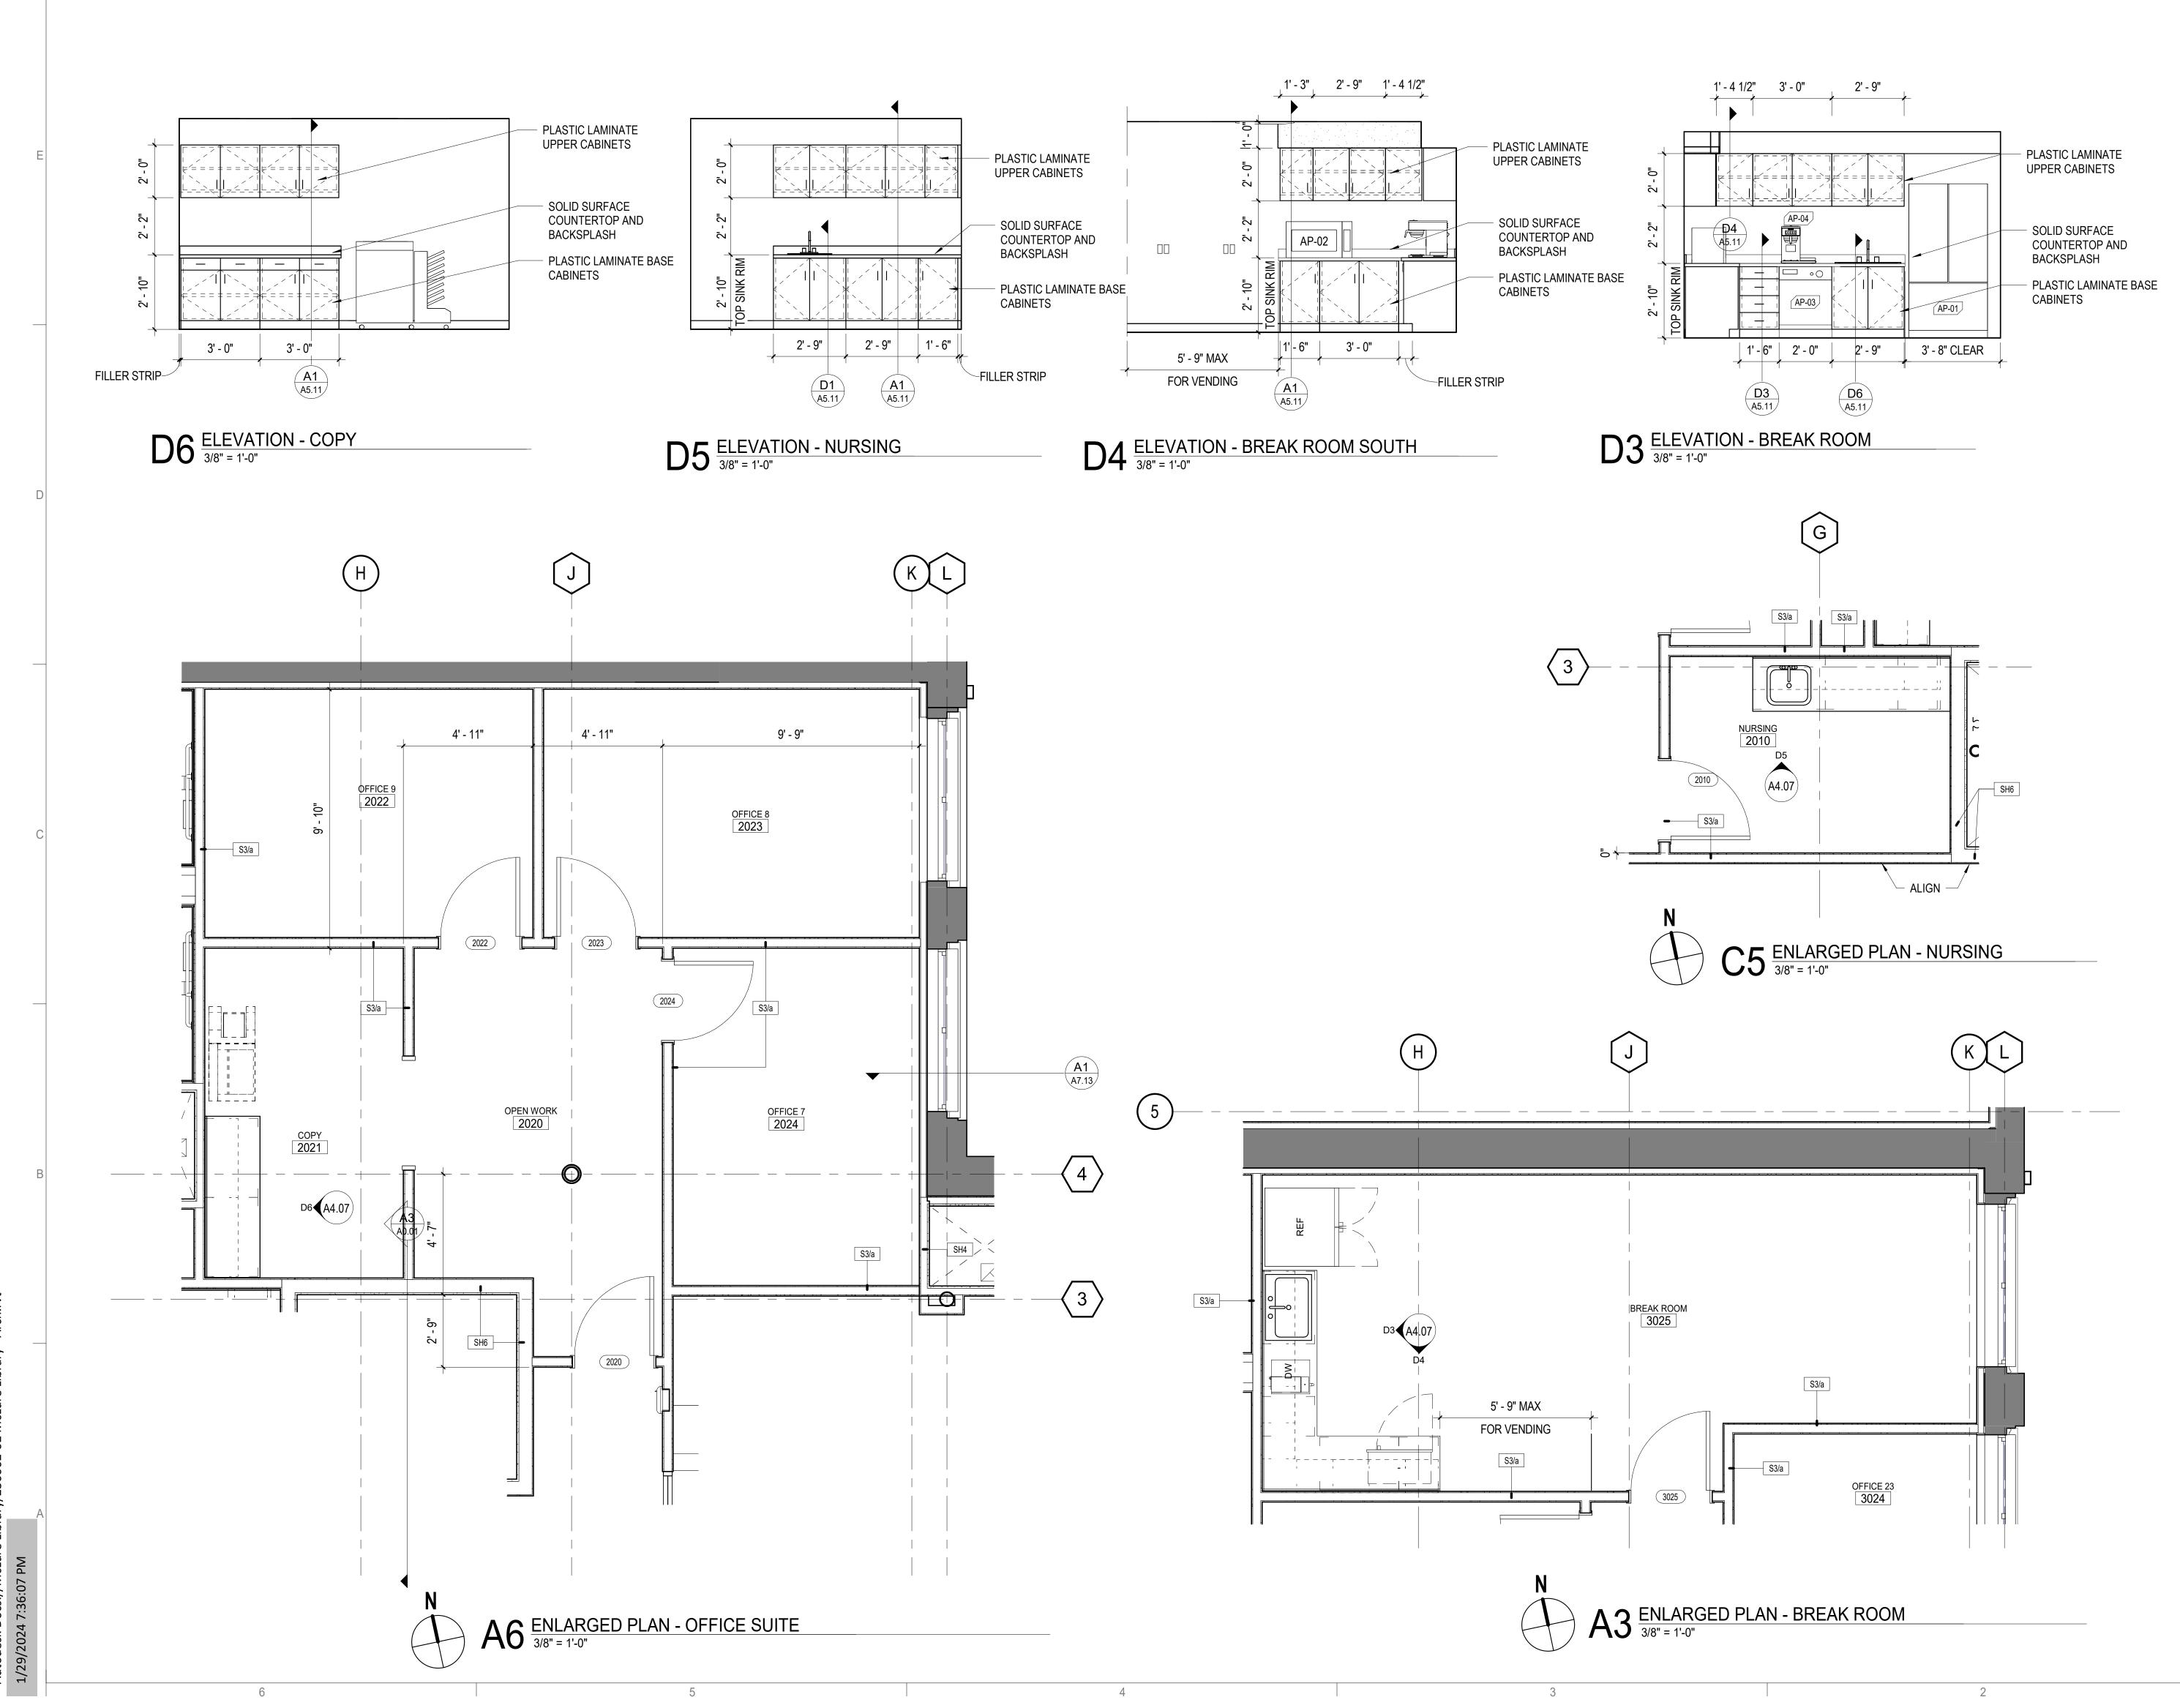


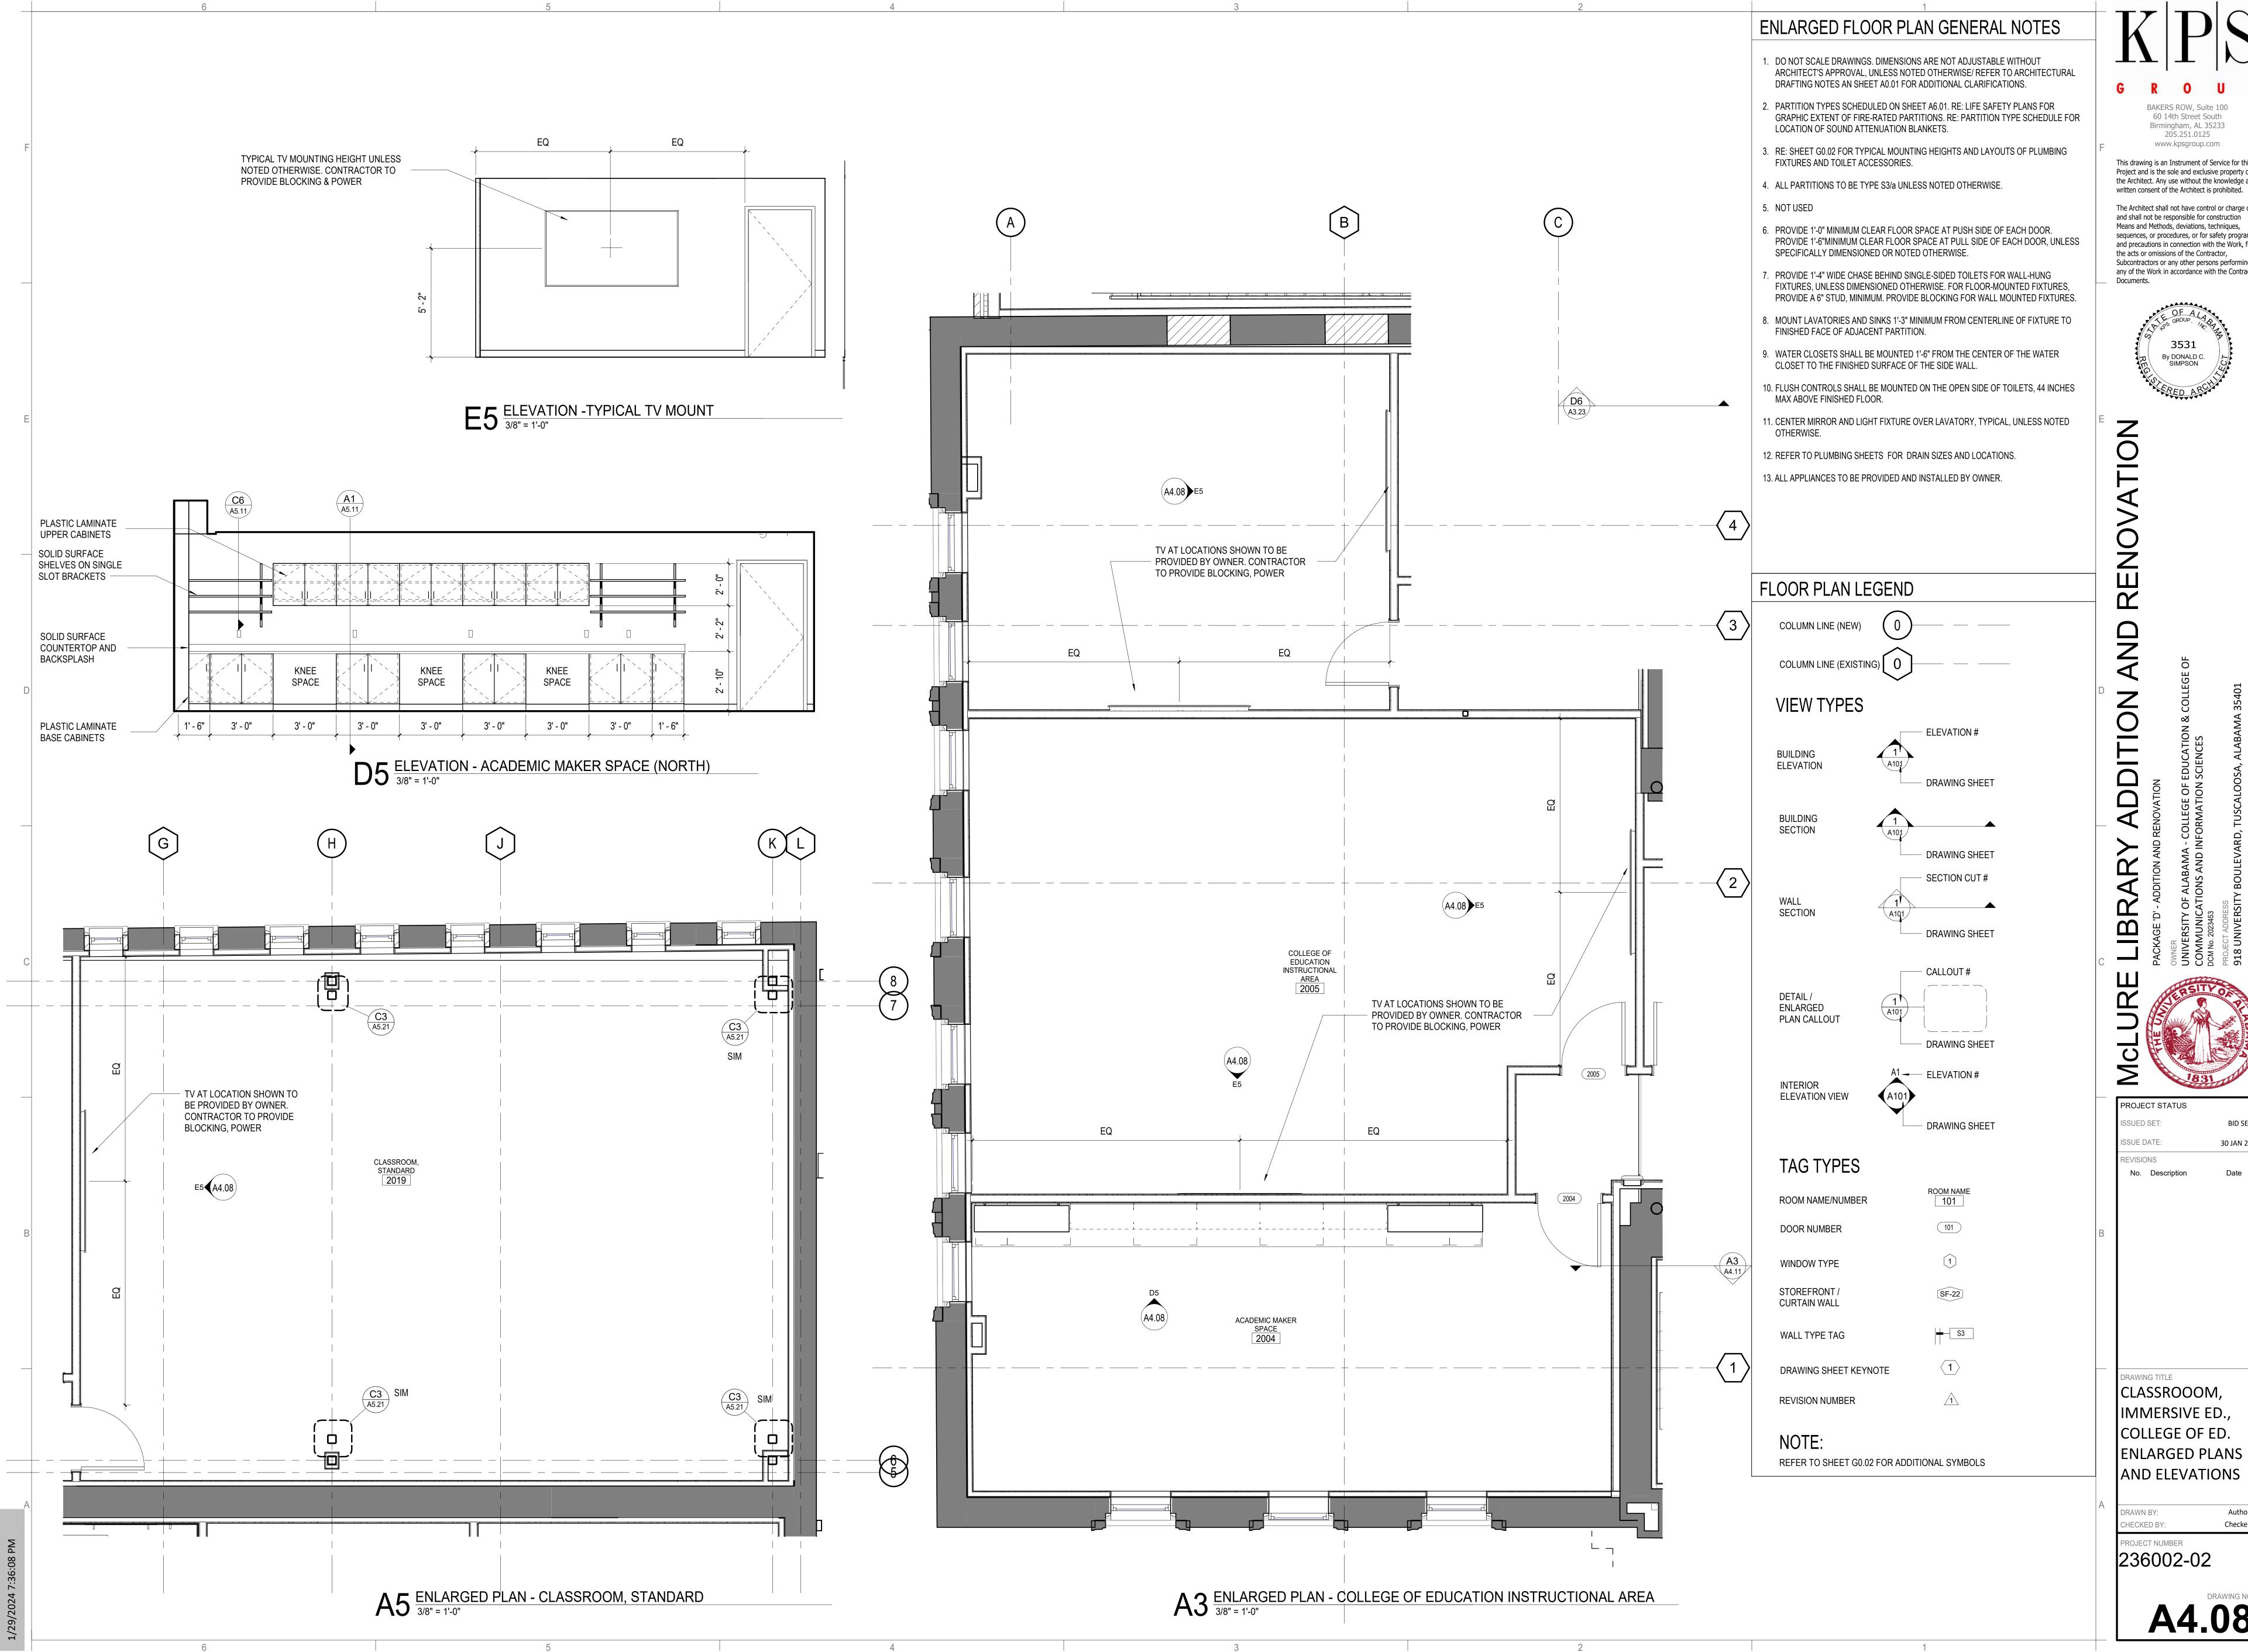

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract





BID SET


30 JAN 24 No. Description


IMMERSIVE ED., COLLEGE OF ED. ENLARGED PLANS AND ELEVATIONS


PROJECT NUMBER 236002-02

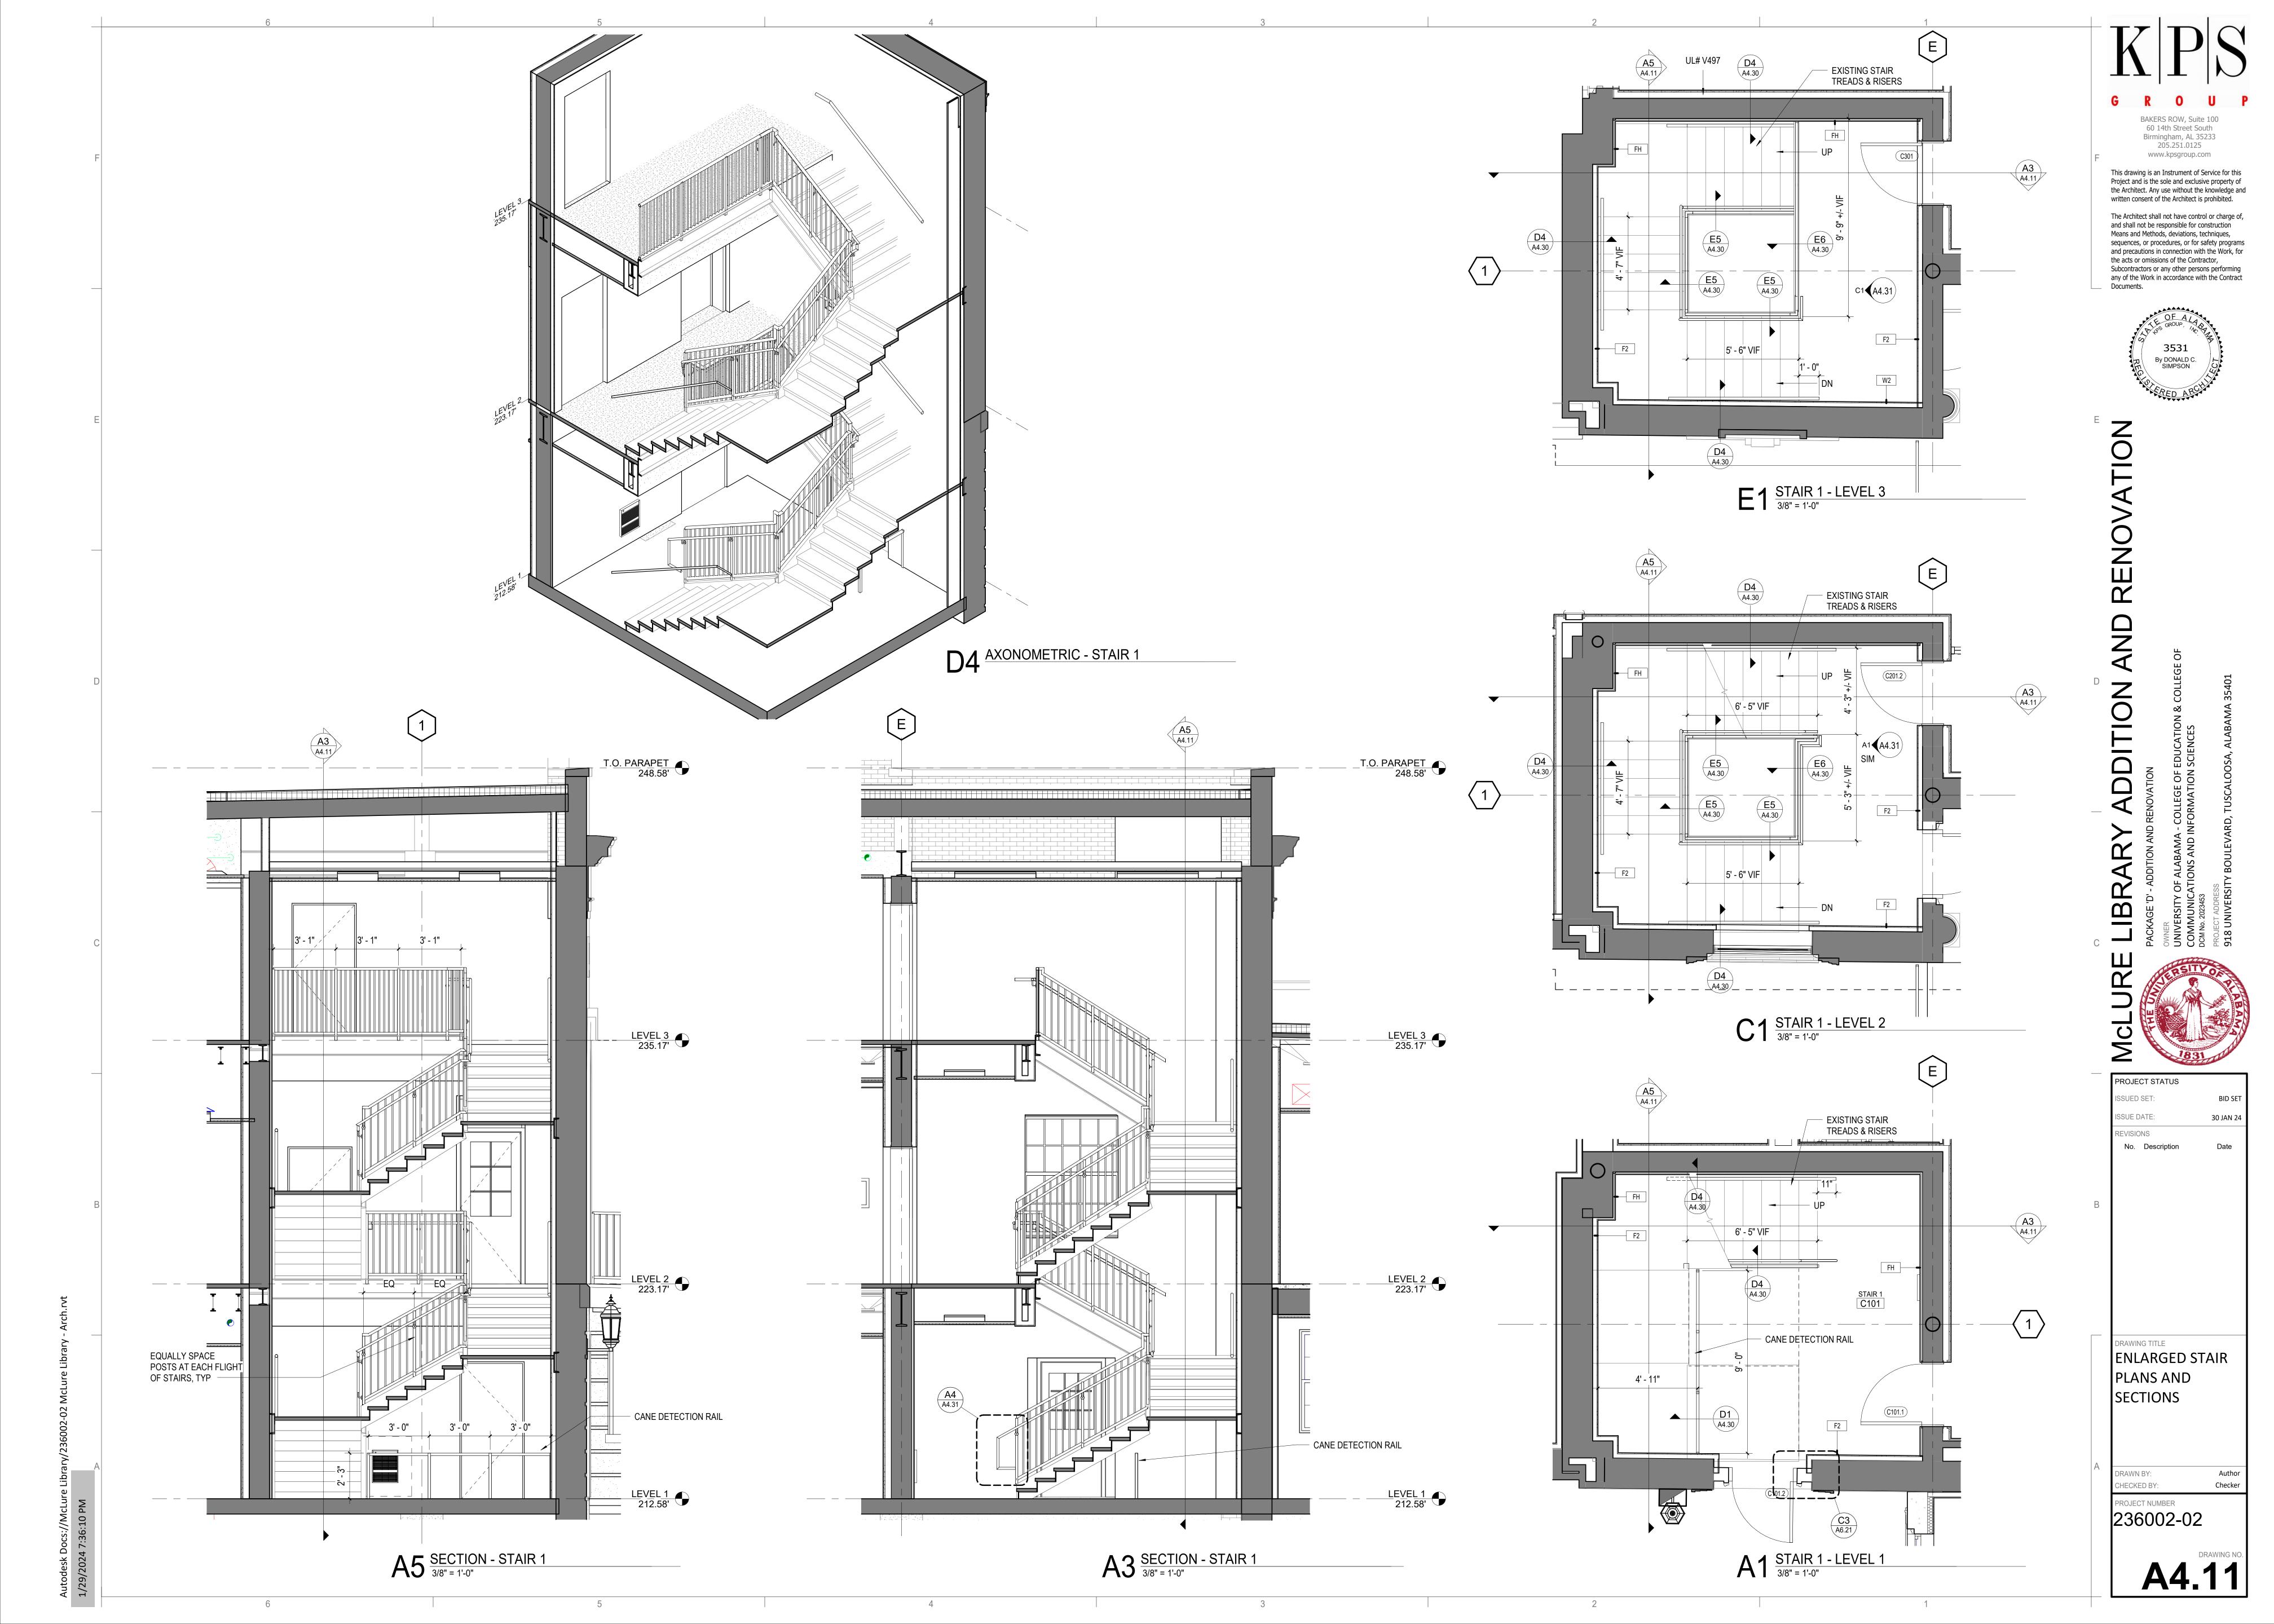

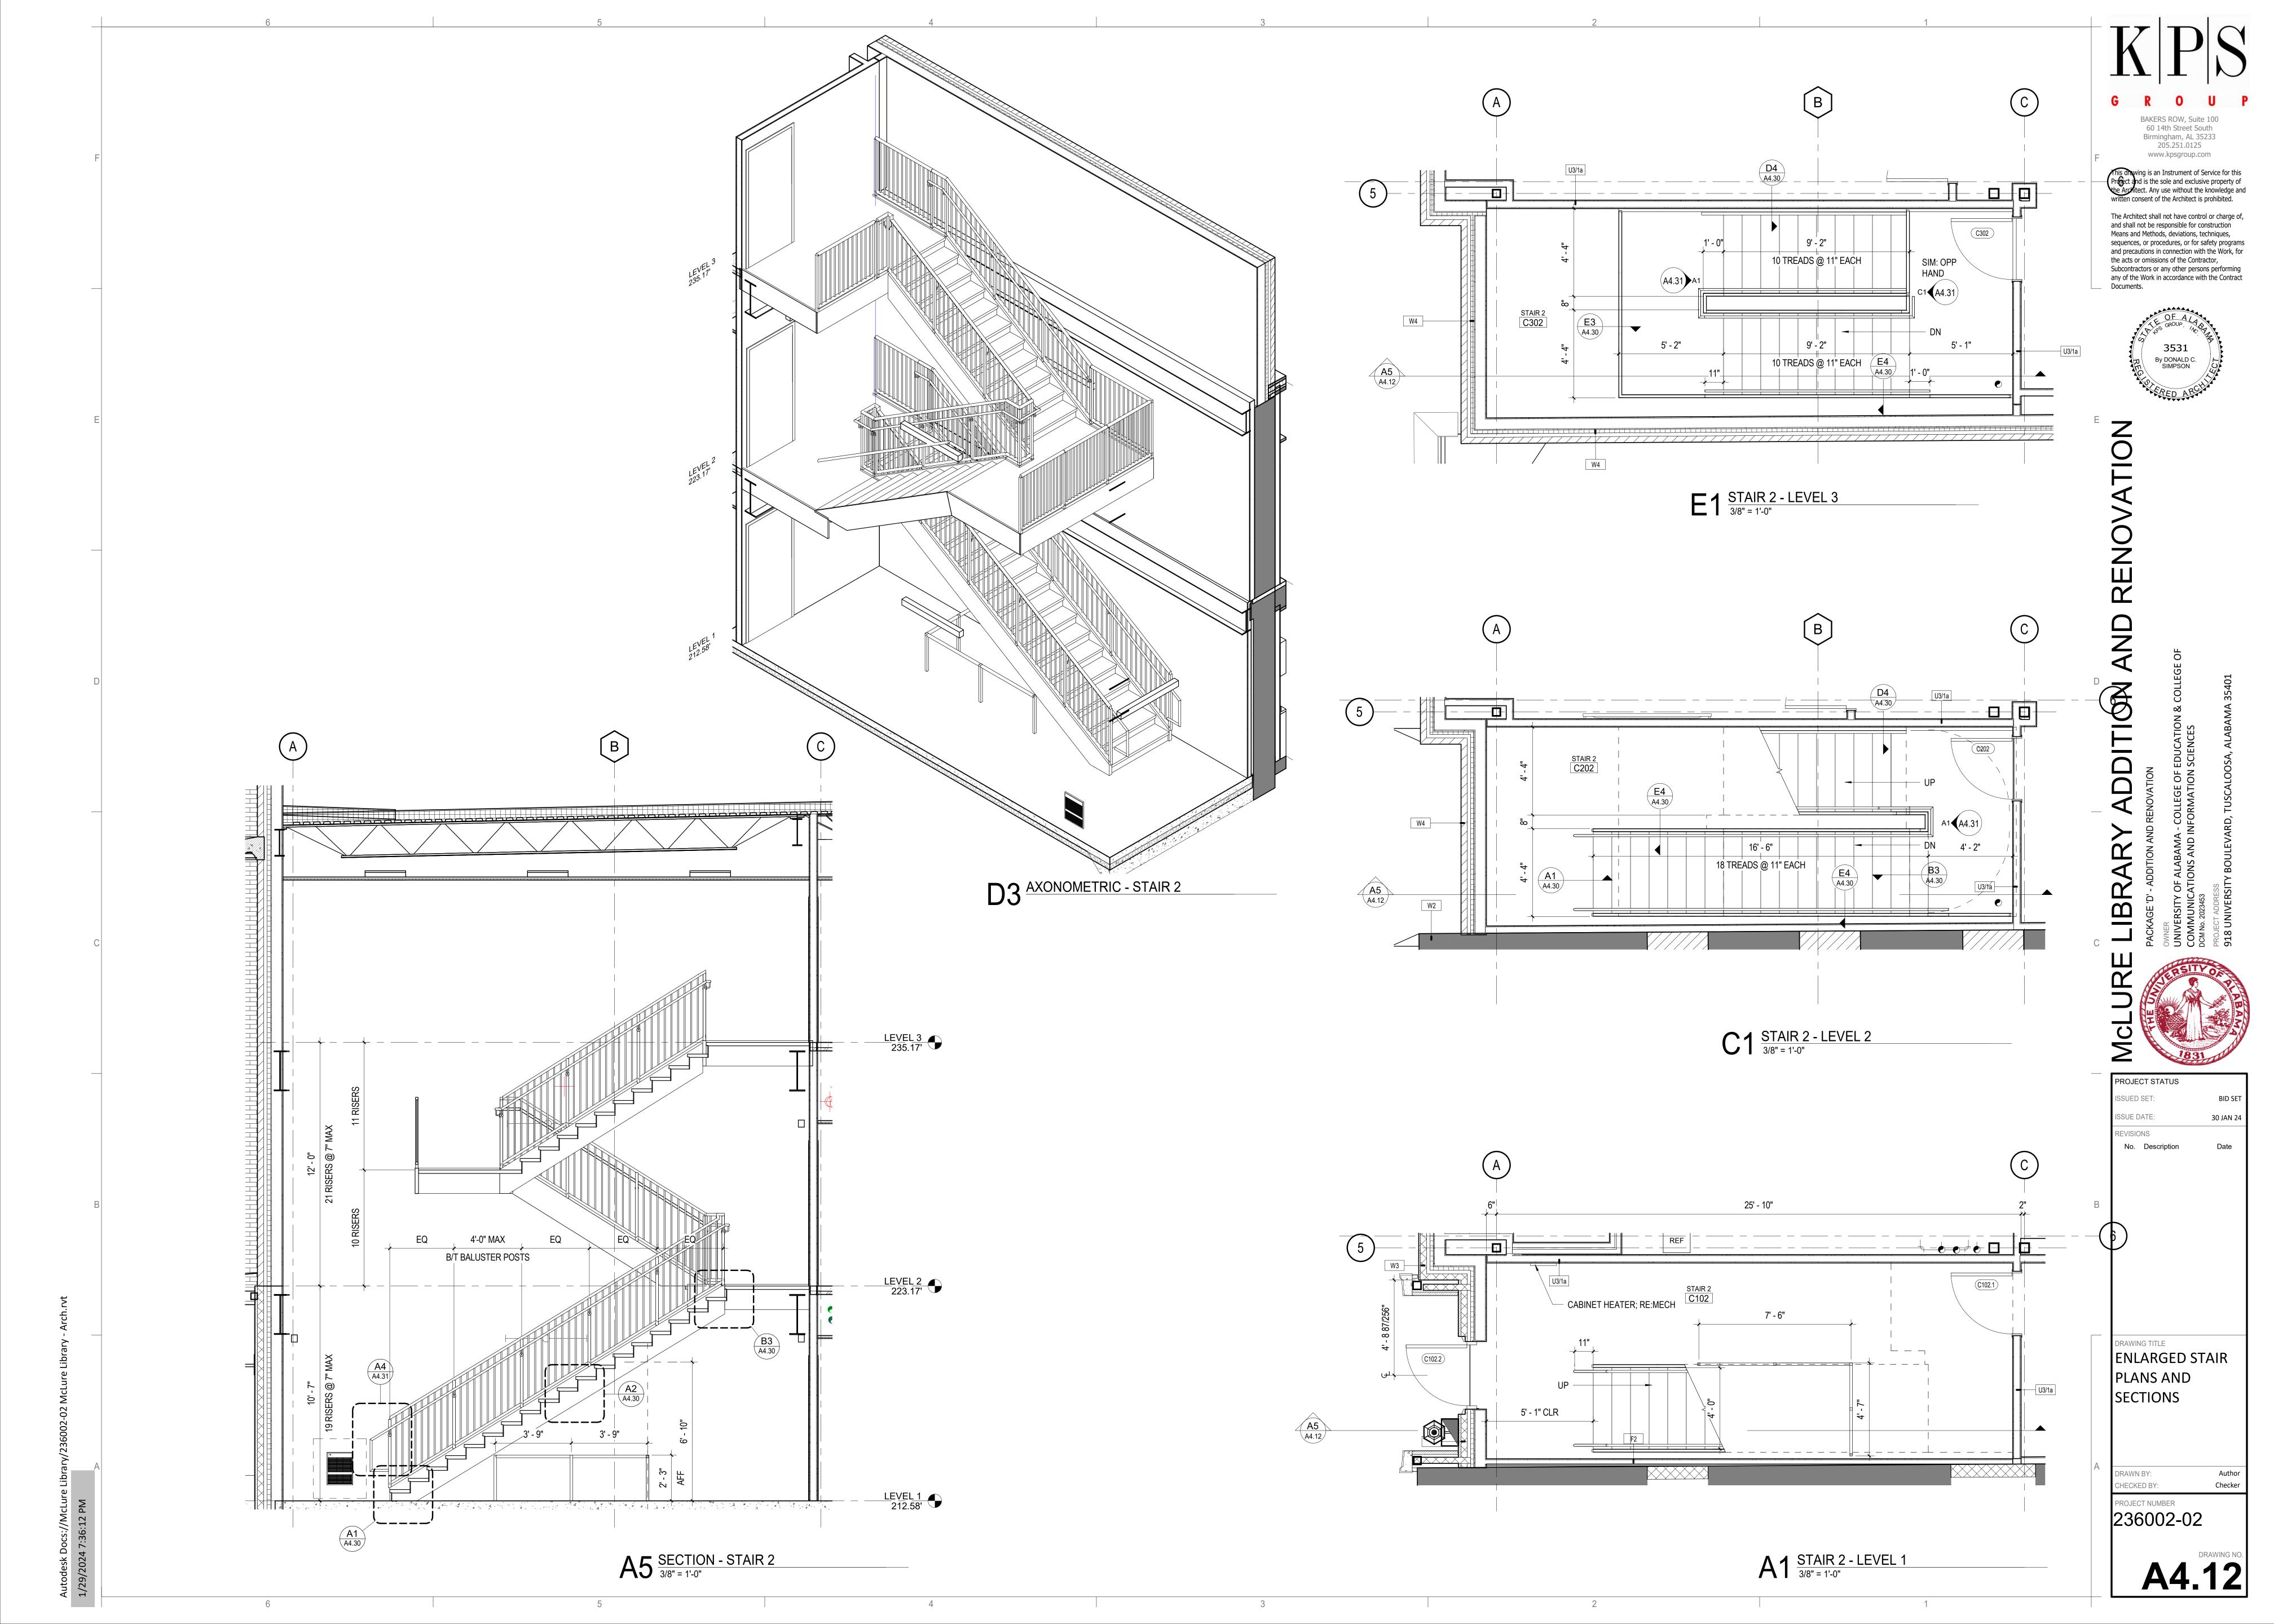

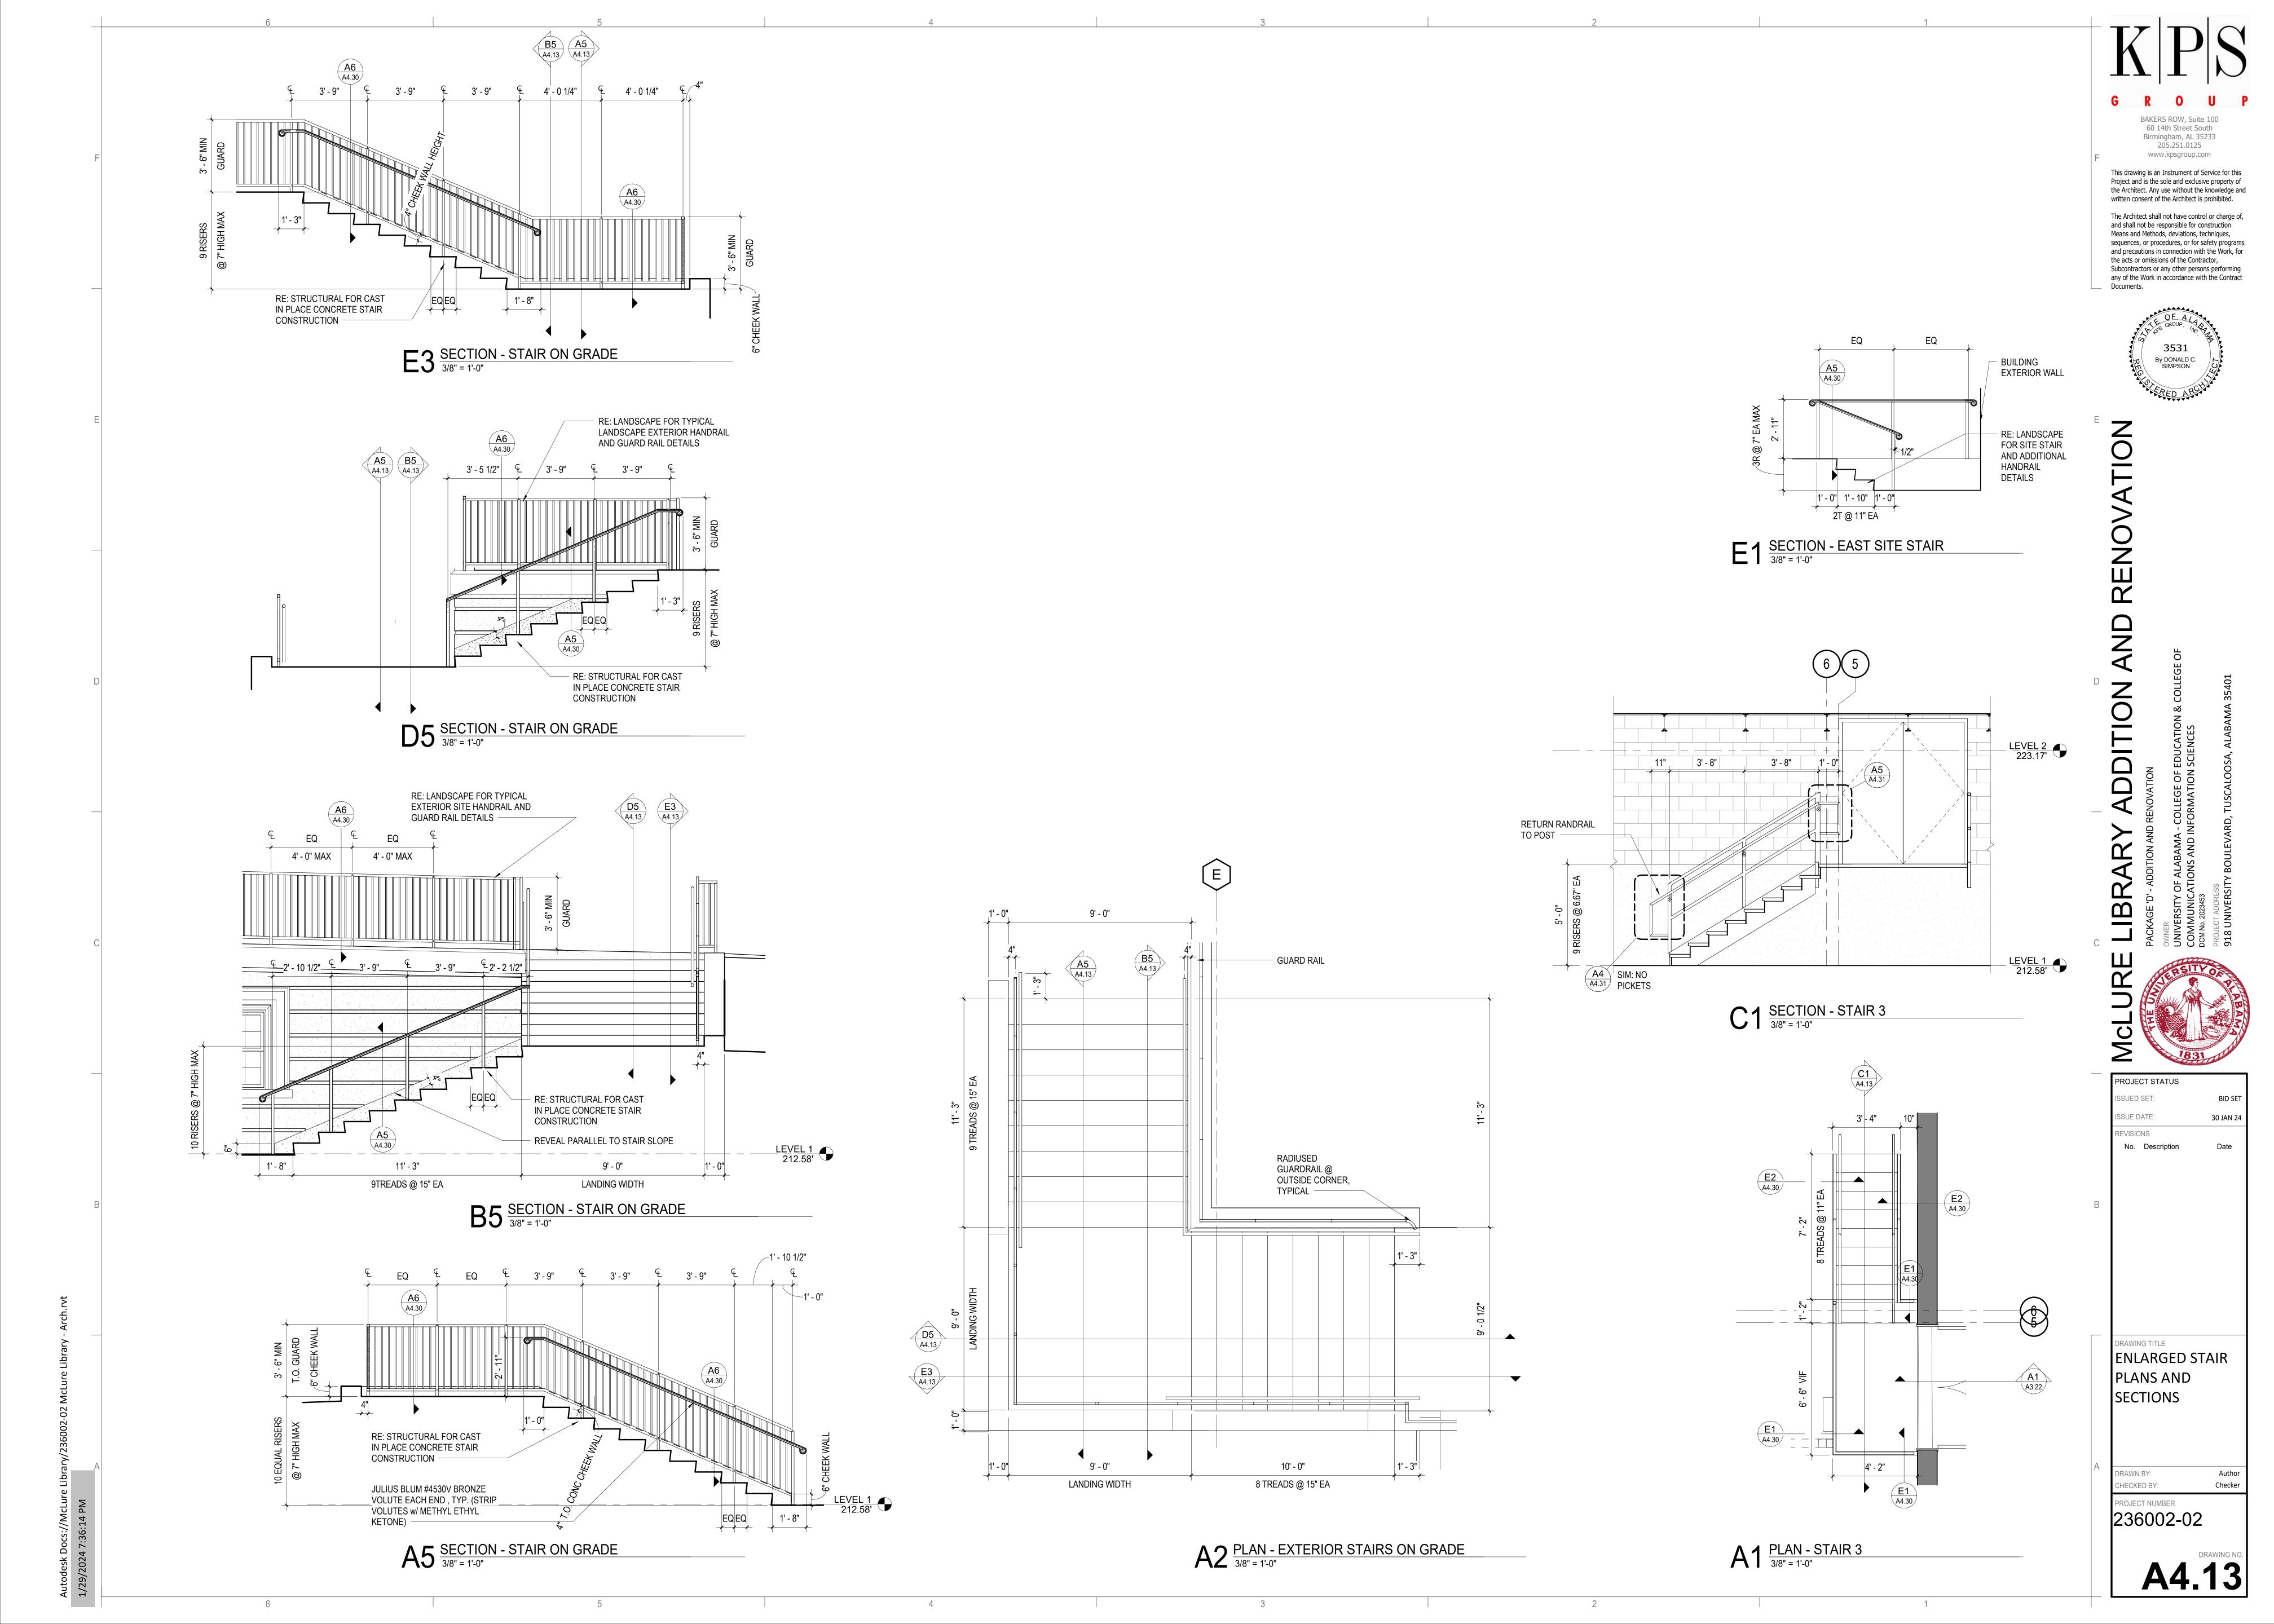

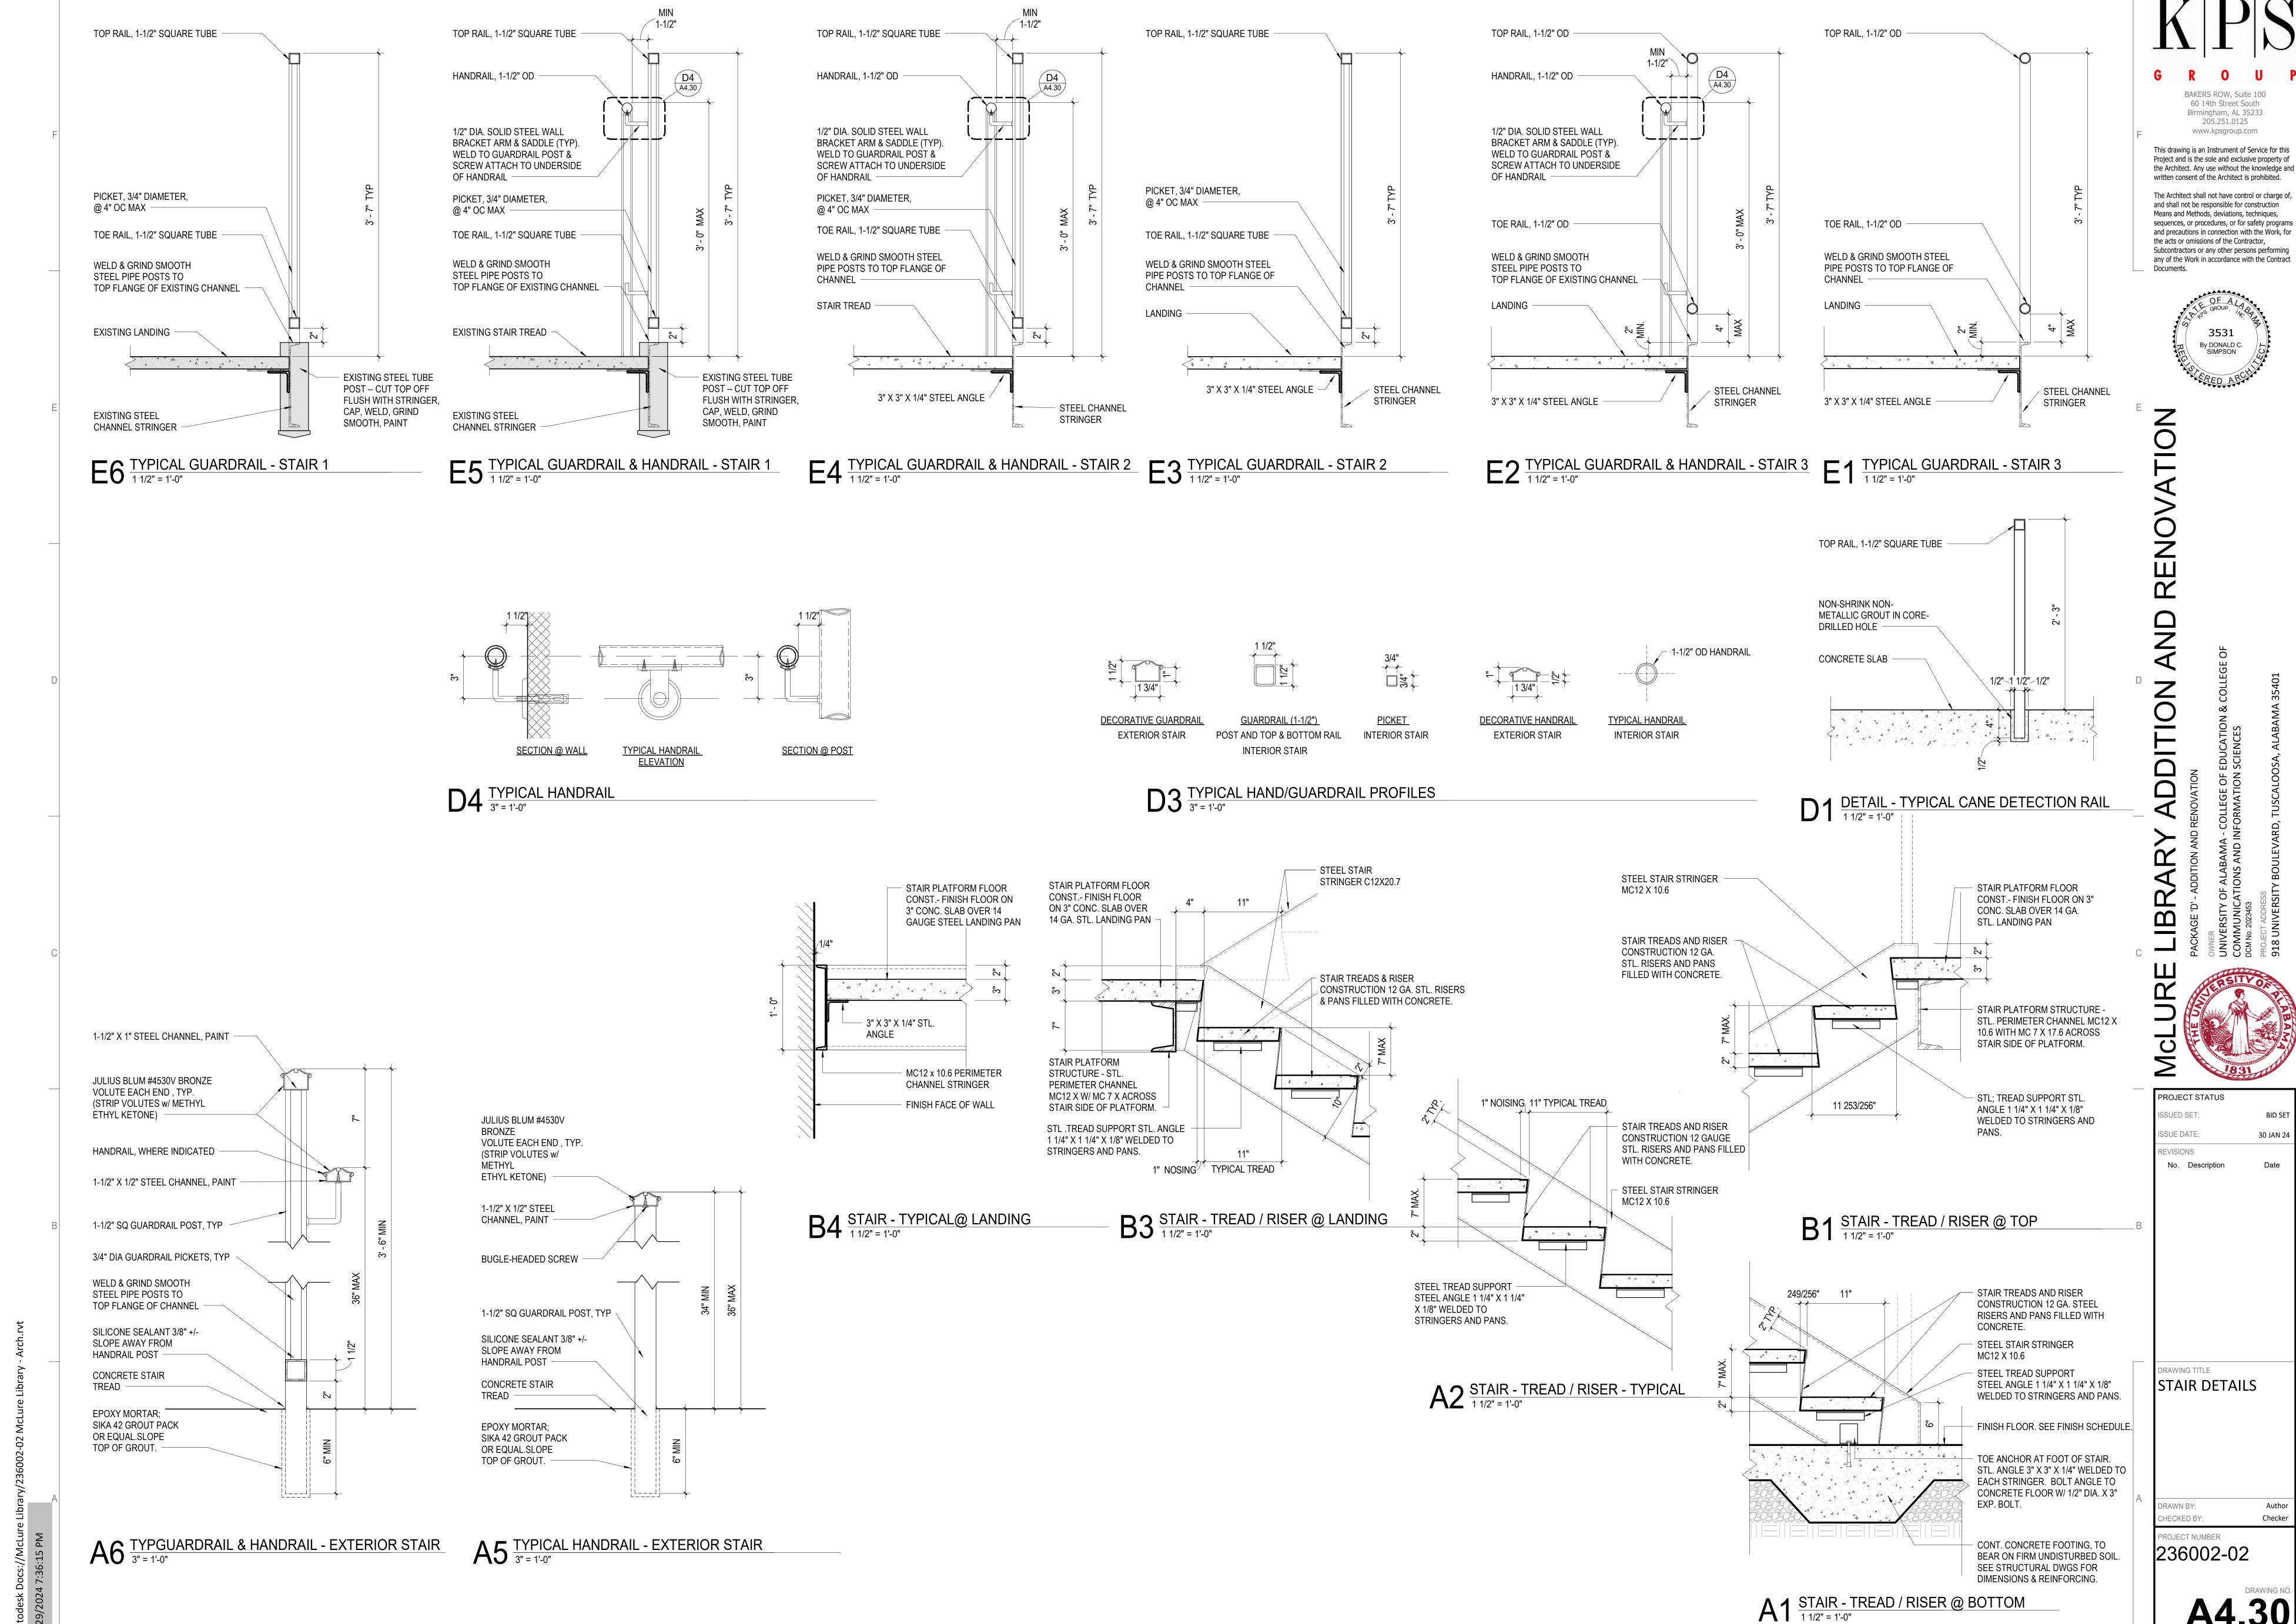

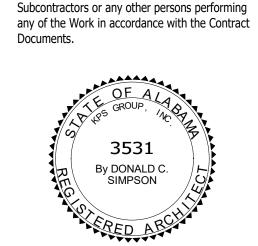


AND


ADDITION


JBR,

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor,

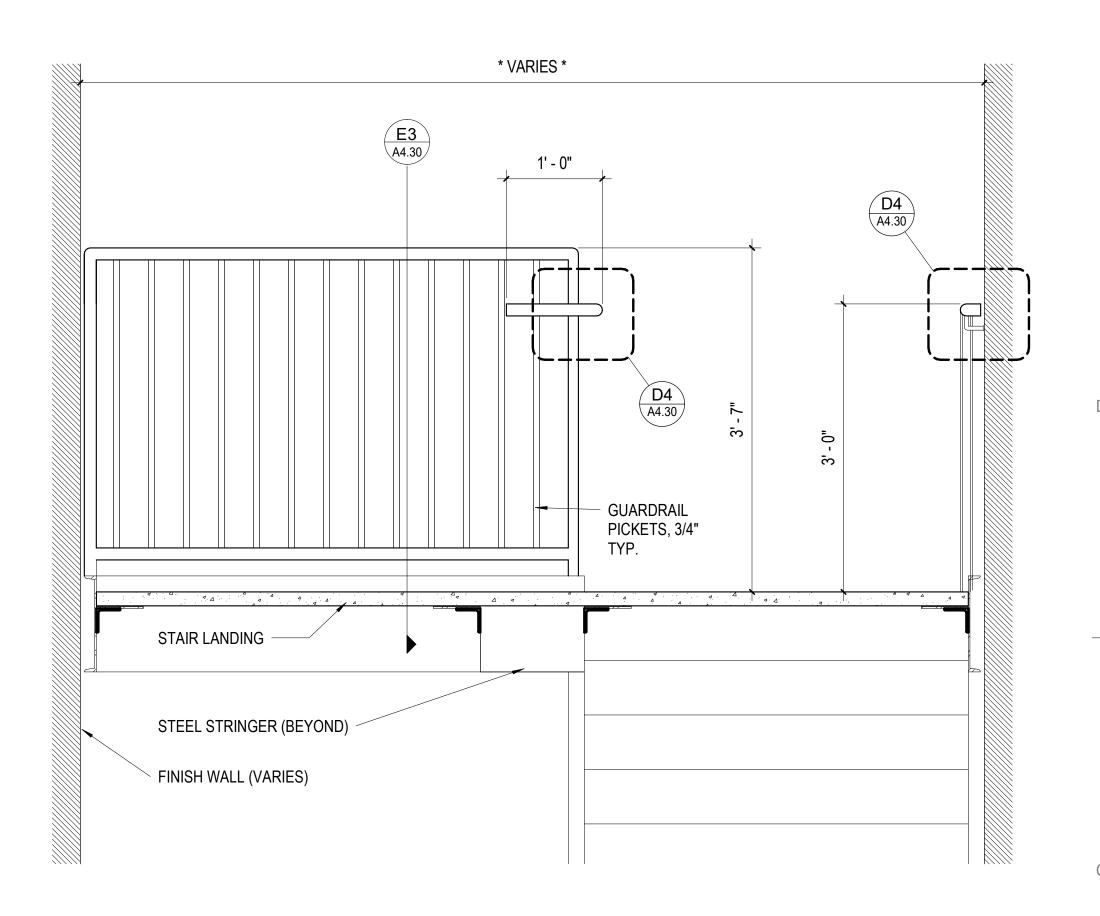

C1 DETAIL - TOP OF STAIR LANDING 1'' = 1'-0''

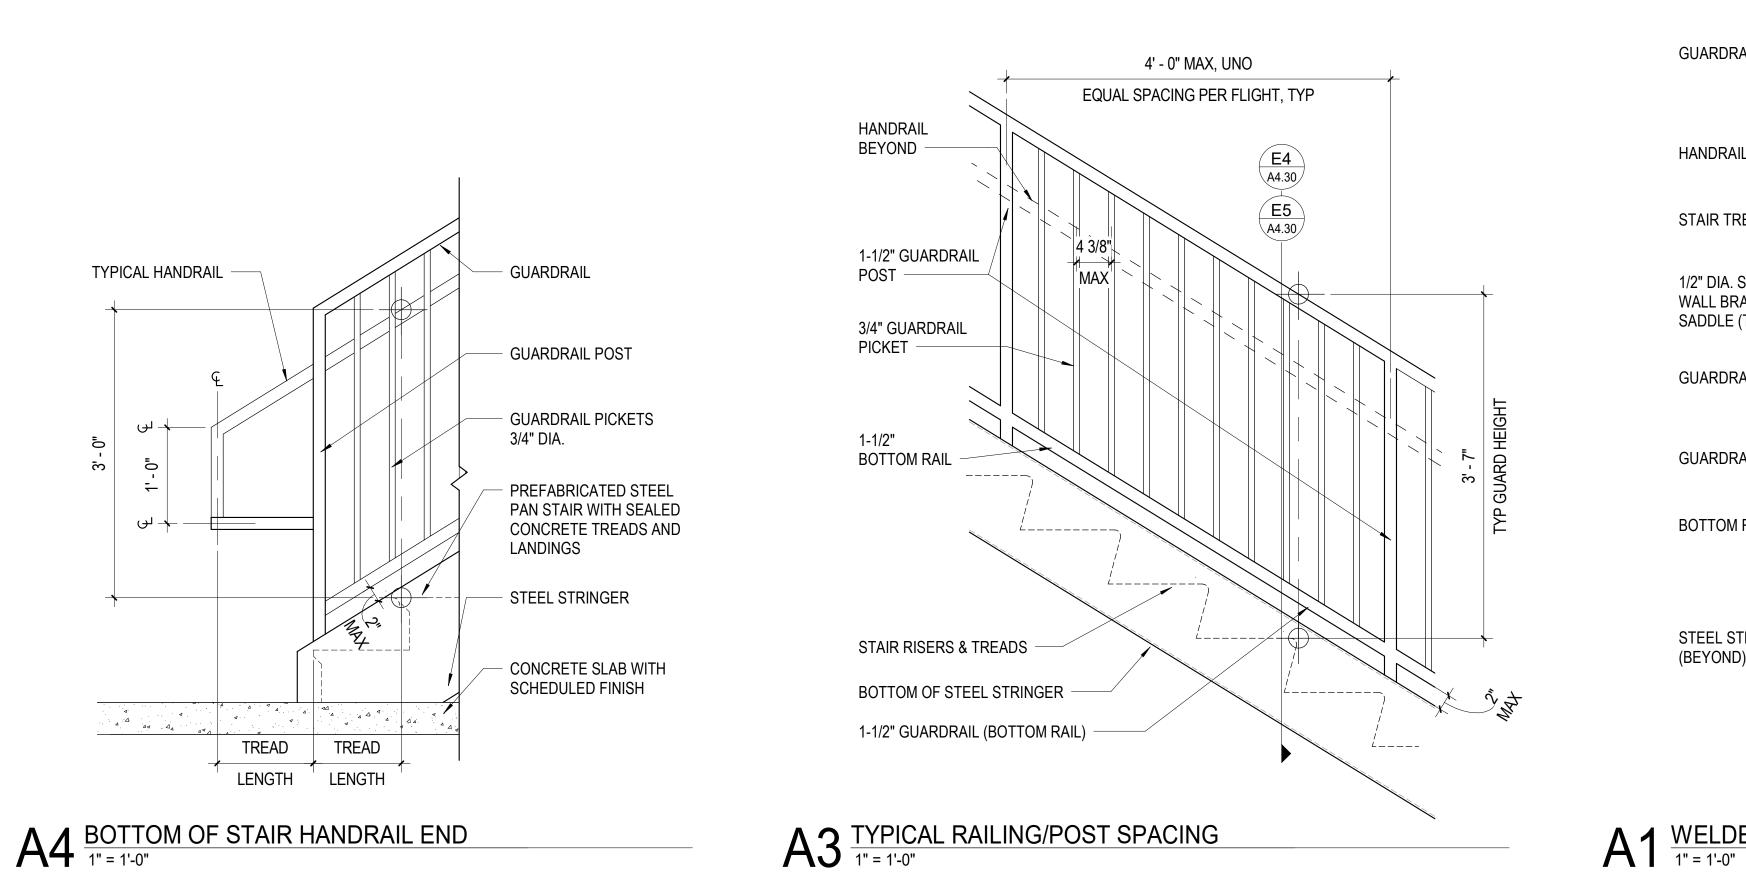

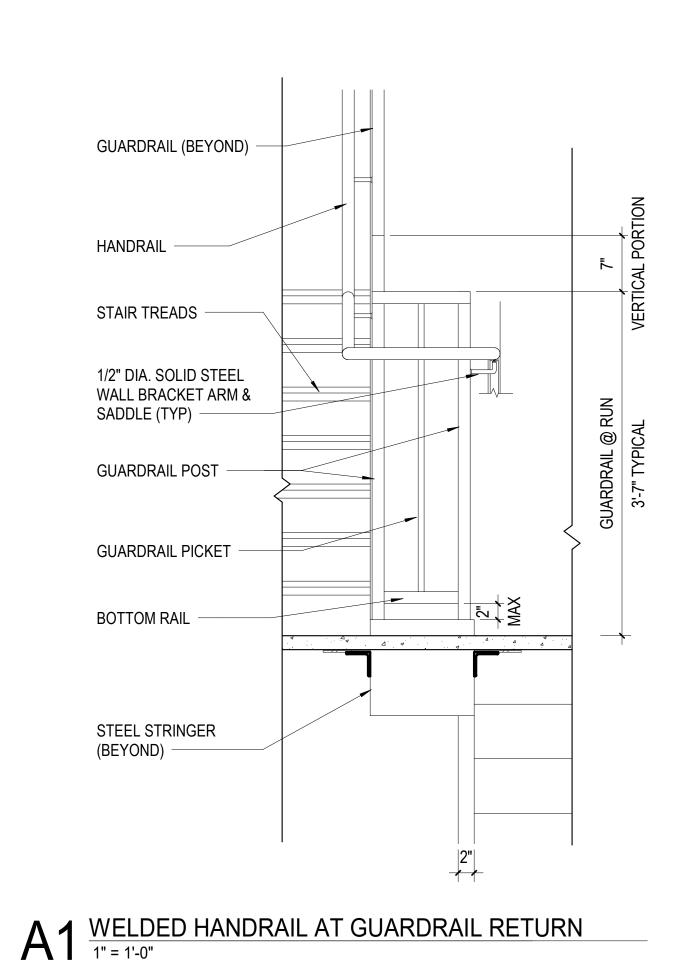


PROJECT STATUS BID SET SSUED SET: SSUE DATE: 30 JAN 24 REVISIONS Date No. Description RAWING TITLE STAIR DETAILS HECKED BY: PROJECT NUMBER 236002-02 A4.31

-1' - 0" PAST NOSING, TYP

A5 TOP OF STAIR HANDRAIL END

1" = 1'-0"

E2 A4.30

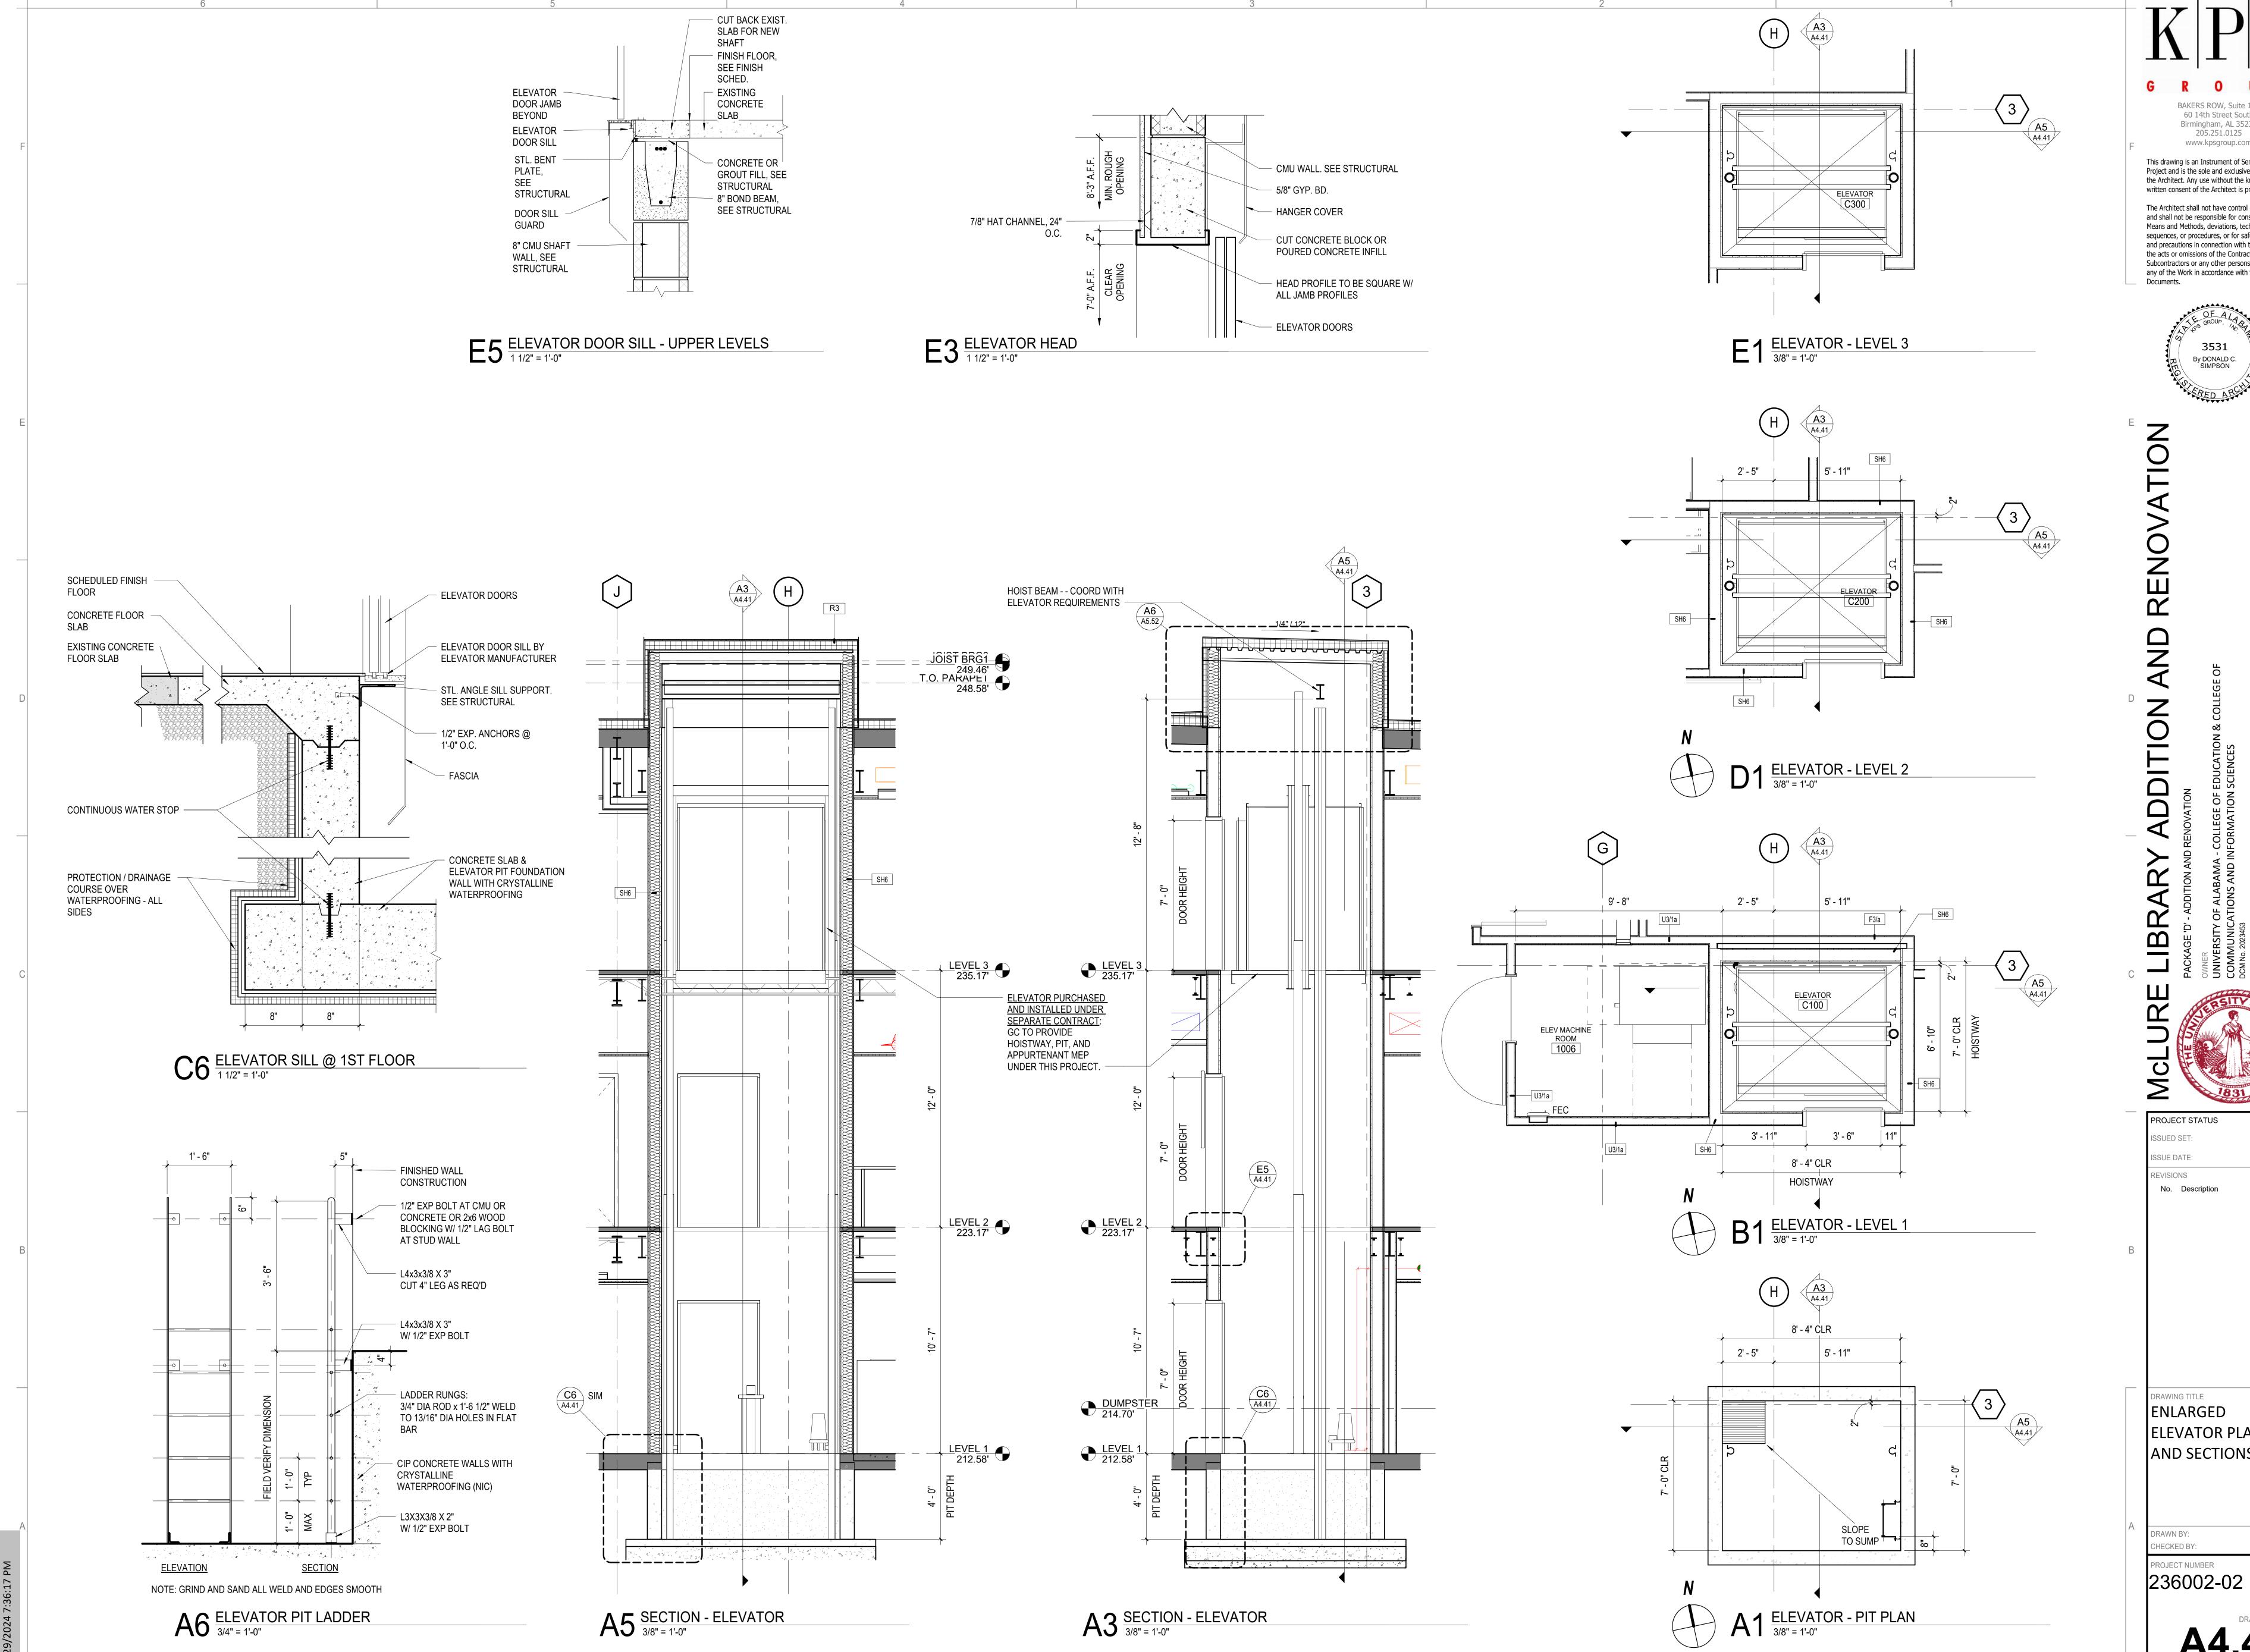


PROJECT STATUS BID SET 30 JAN 24 No. Description ENLARGED **ELEVATOR PLANS** AND SECTIONS HECKED BY:

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited. The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract

Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

BAKERS ROW, Suite 100 60 14th Street South

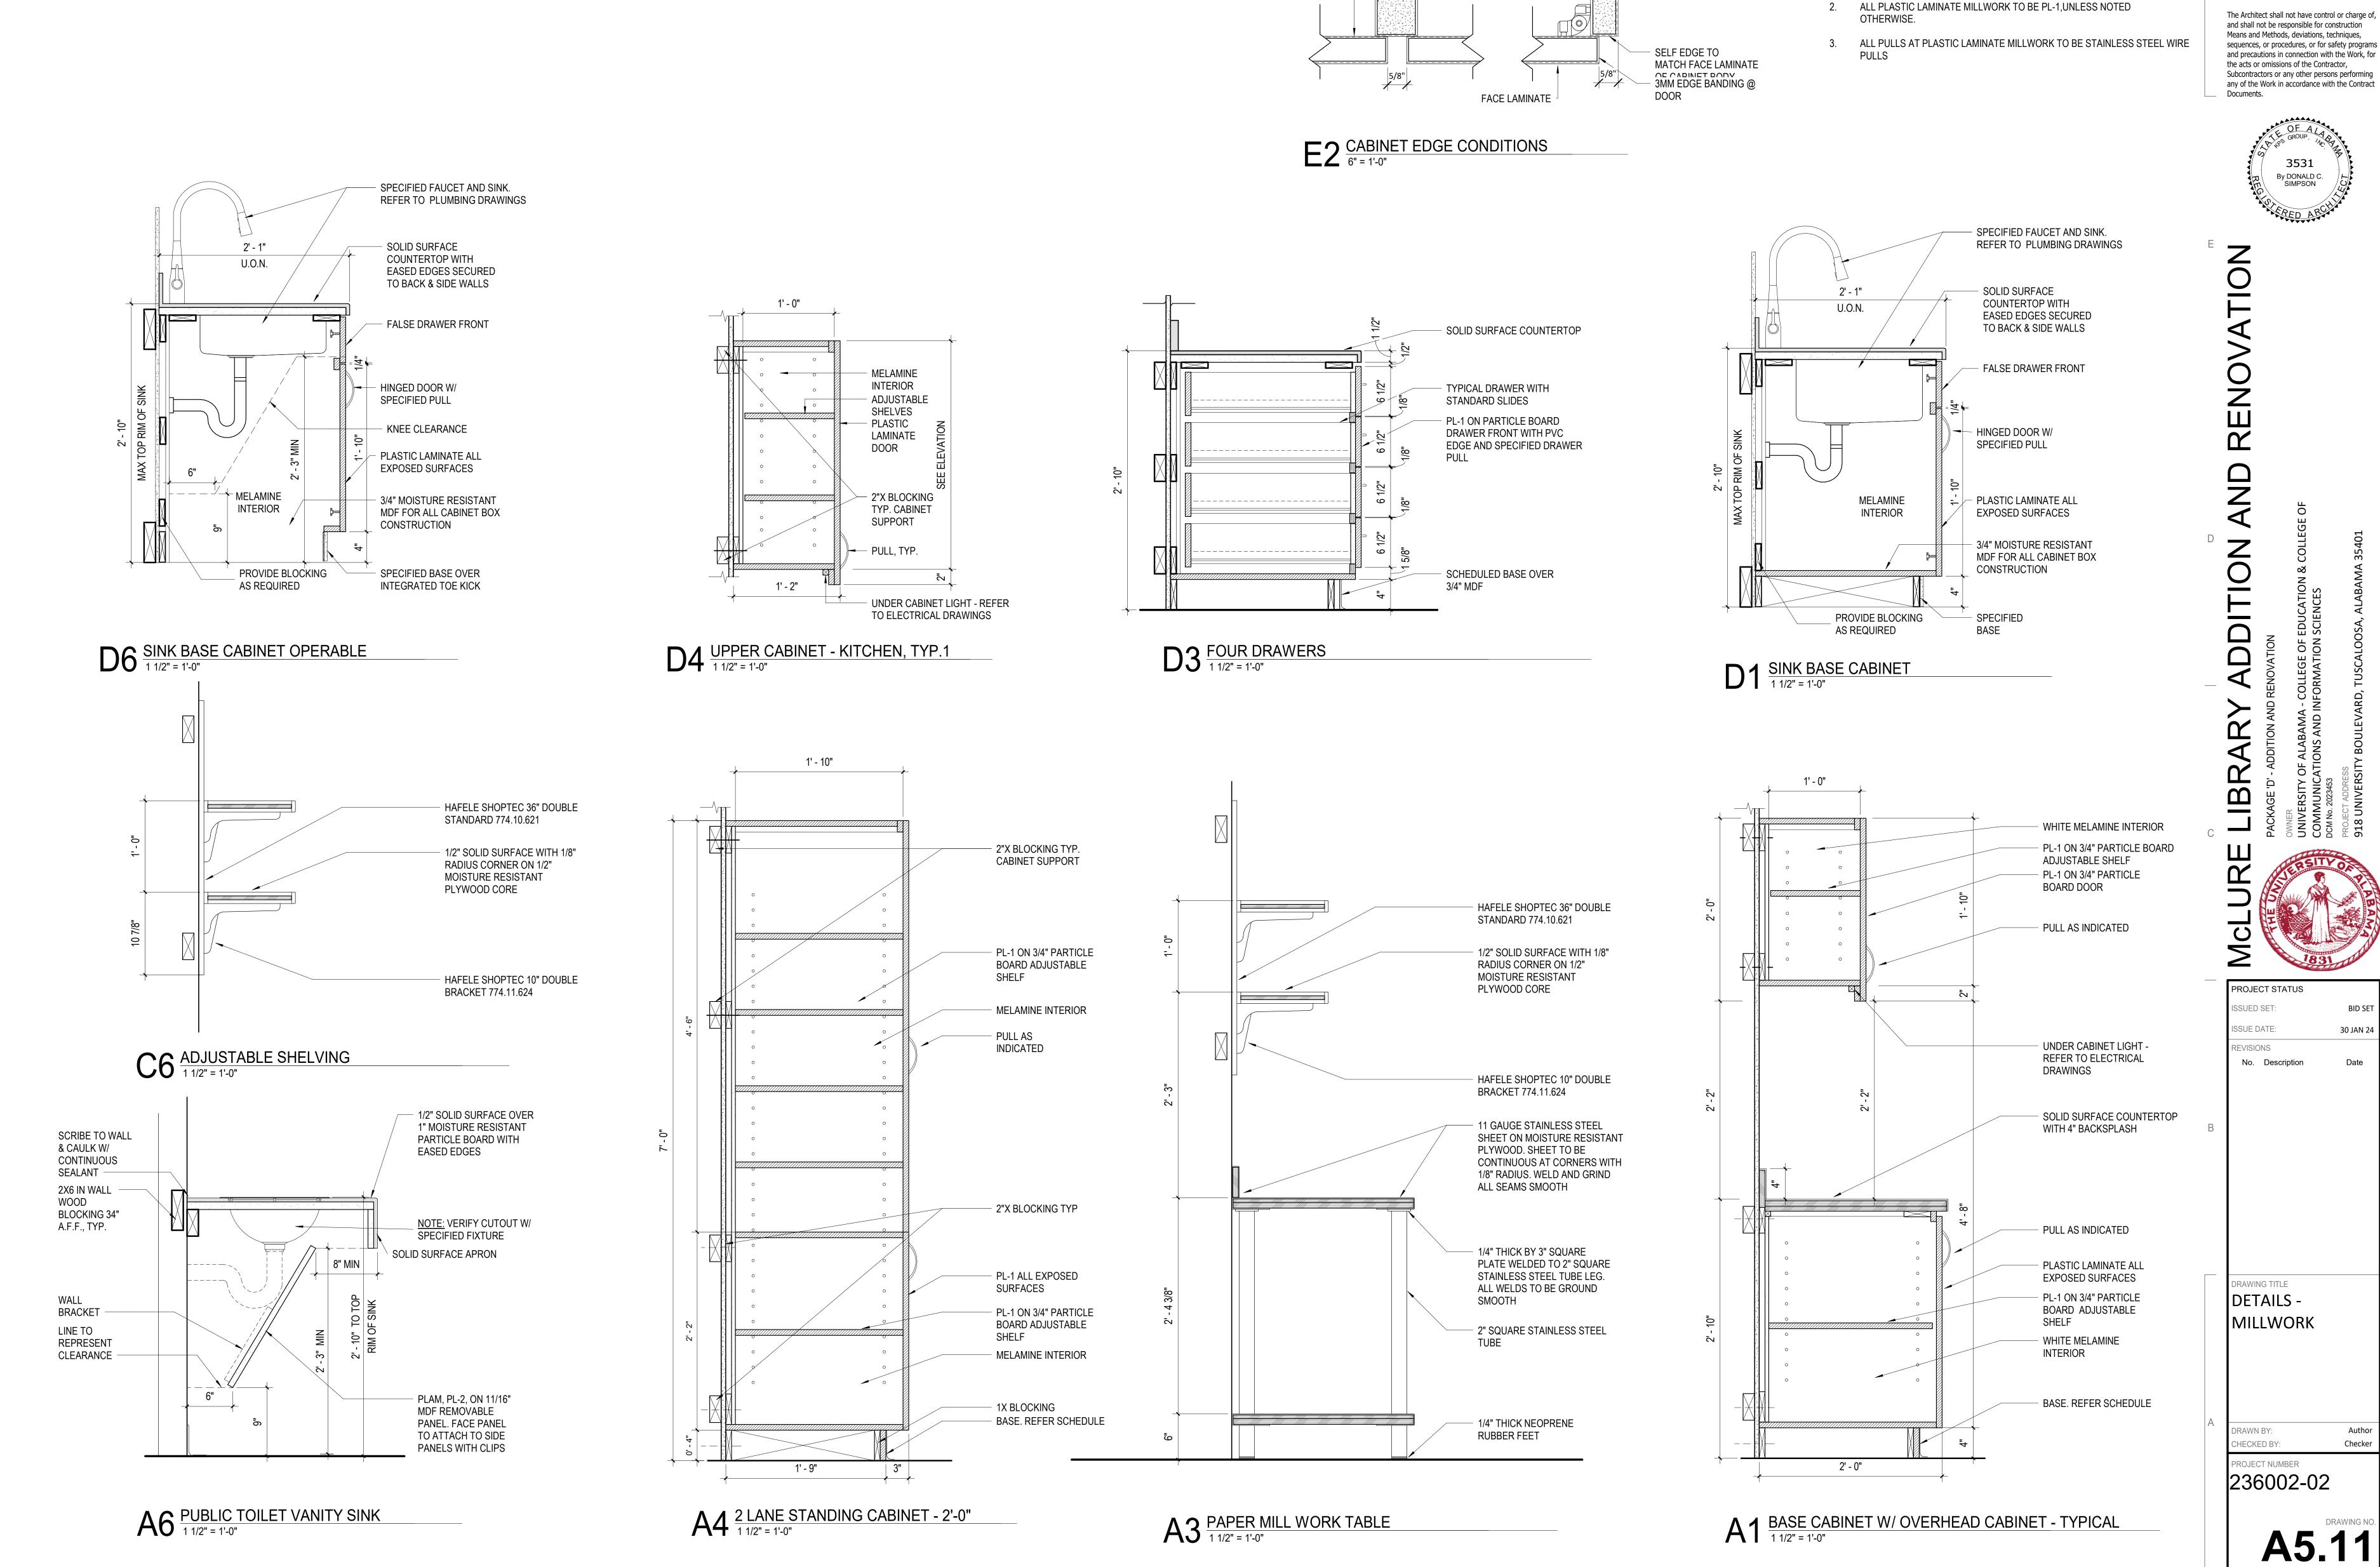

MILLWORK GENERAL NOTES

1. TYPICAL IN PARTITION CAVITIES AT ALL WALL MOUNTED MILLWORK,

- CABINET LINER

- FACE LAMINATE

CABINET BODY

FACE LAMINATE

CASEWORK, EQUIPMENT, GRAB BARS, ACCESSORIES ETC. PROVIDE BLOCKING AS REQUIRED TO SUIT THE INSTALLATION OF THE ITEM.

BLOCKING FULL WIDTH PLUS 12" PAST EACH END OF CASEWORK OR

ALIGN WITH ANCHOR POINTS FOR THE INSTALLATION OF THE ITEM.

OWNER OR EQUIPMENT PROVIDER.

ANCHOR BLOCKING ENDS TO METAL STUDS SPACED AT 24" OC MAXIMUM WITH ONE STUD AT EACH END OF EACH BLOCKING PIECE. PROVIDE

EQUIPMENT THAT IS TO BE WALL- MOUNTED OR ANCHORED TO WALL. ALL

SHOP DRAWINGS RELATED TO ITEMS TO BE ANCHORED ARE TO INDICATE

AND DIMENSION REQUIRED BLOCKING AT THE APPROPRIATE HEIGHT TO


COORDINATE EXACT LOCATIONS OF WALL MOUNTED EQUIPMENT WITH

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

BID SET

60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com


BAKERS ROW, Suite 100

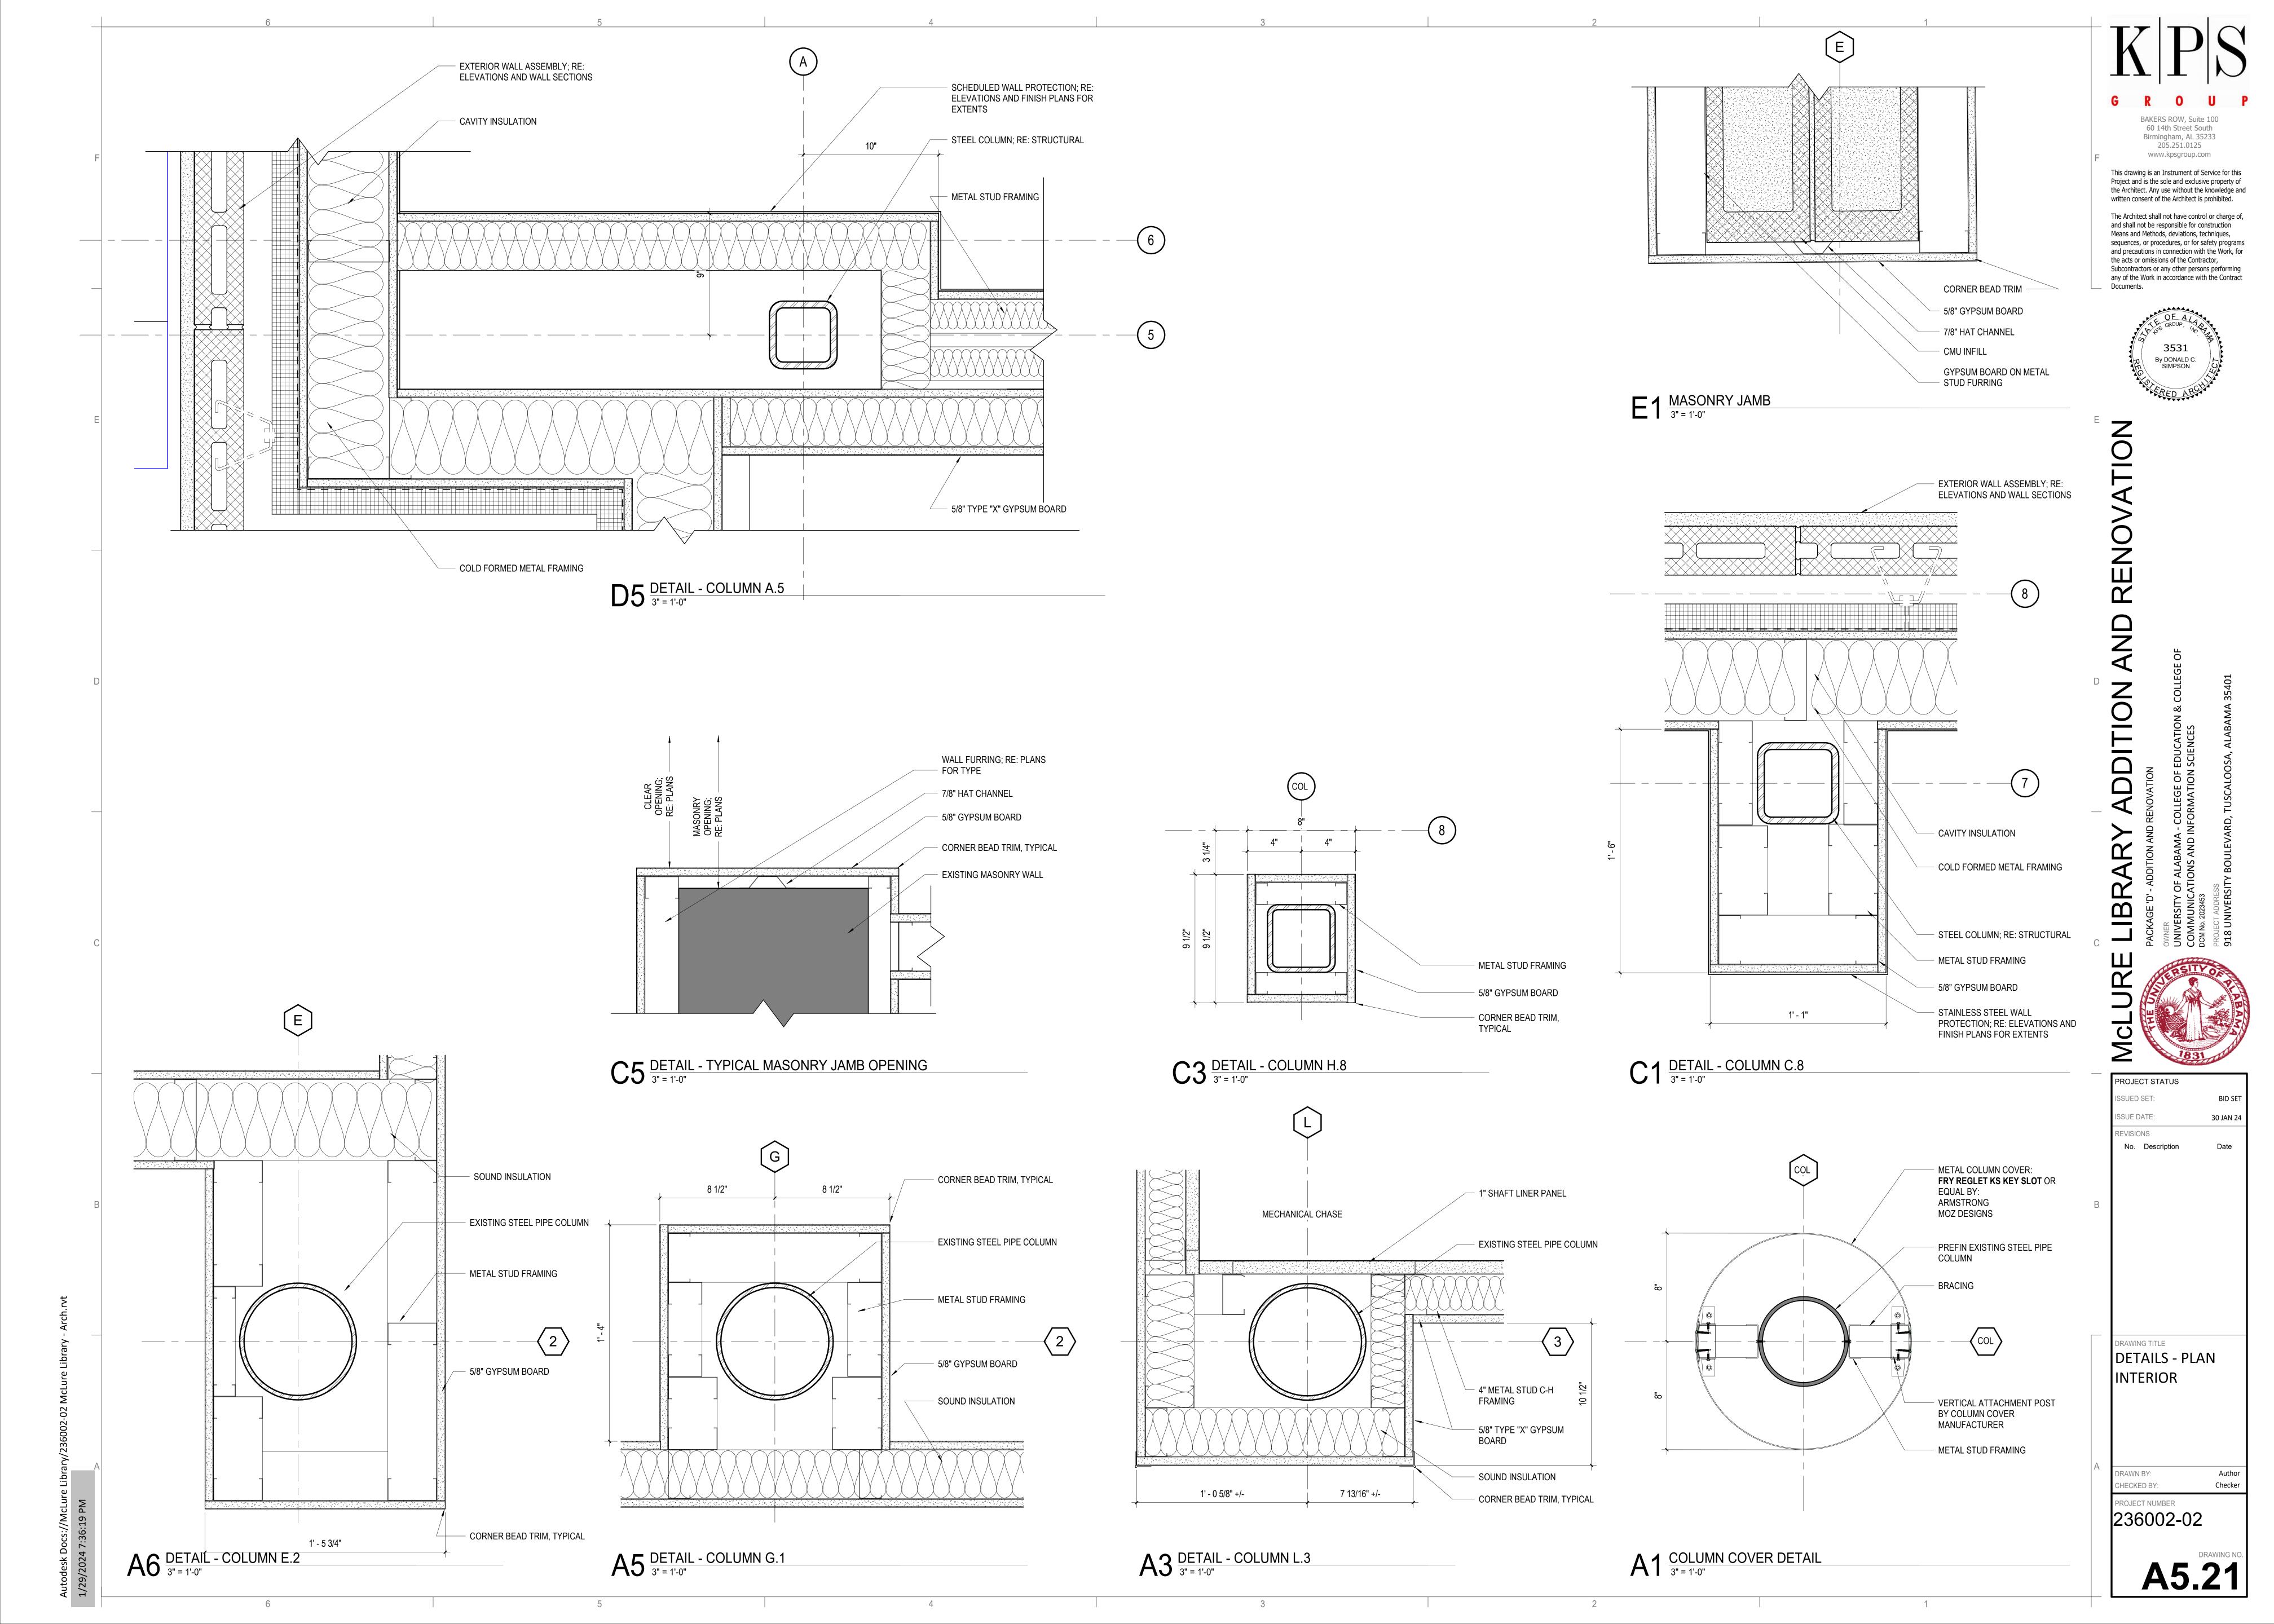



BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com


This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of,

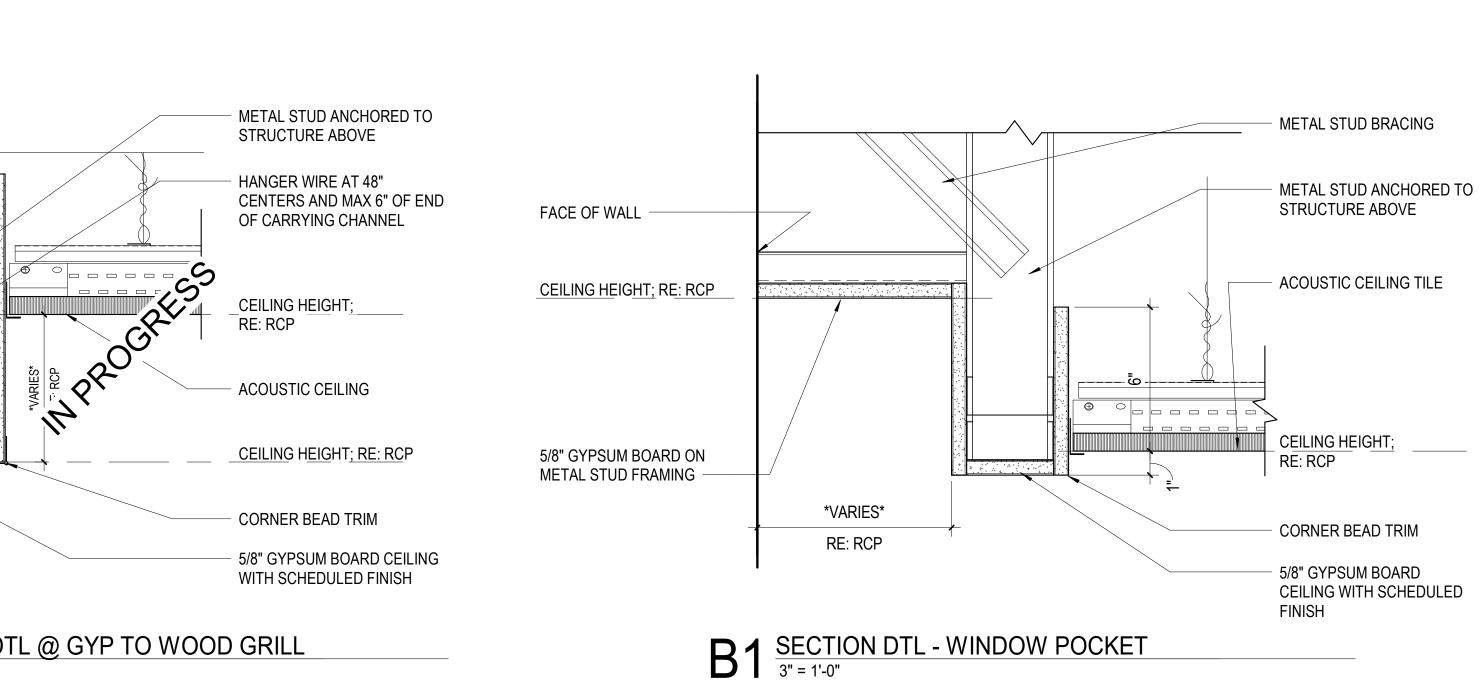

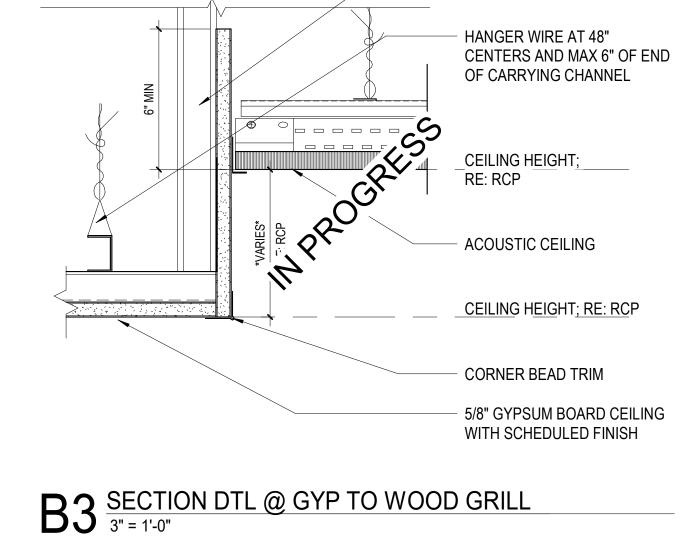

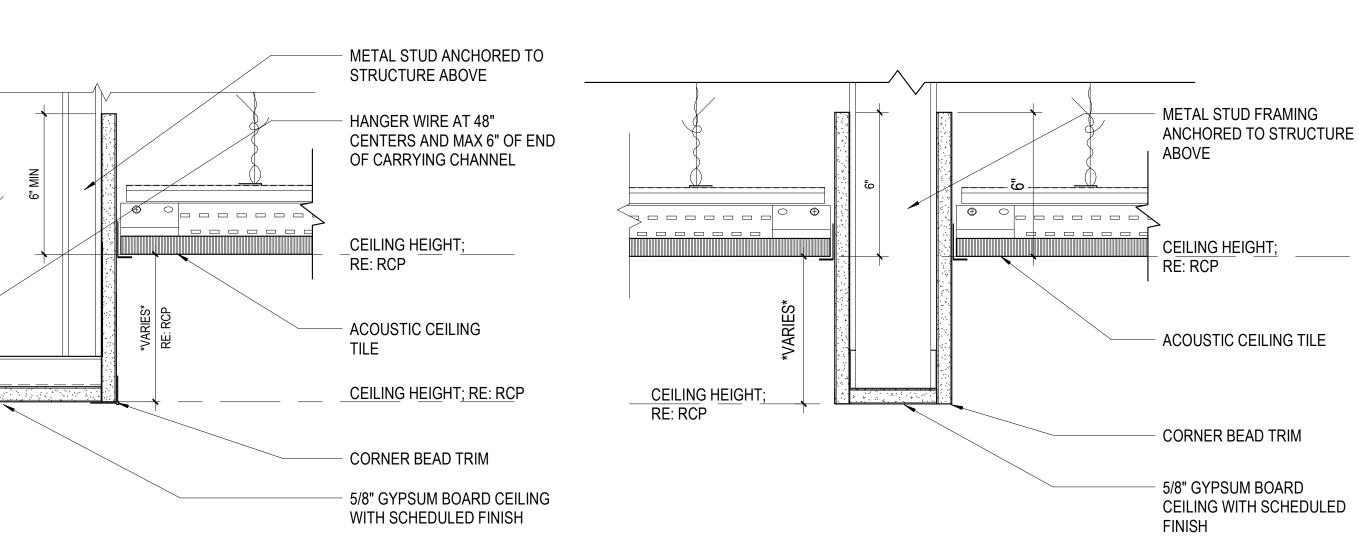

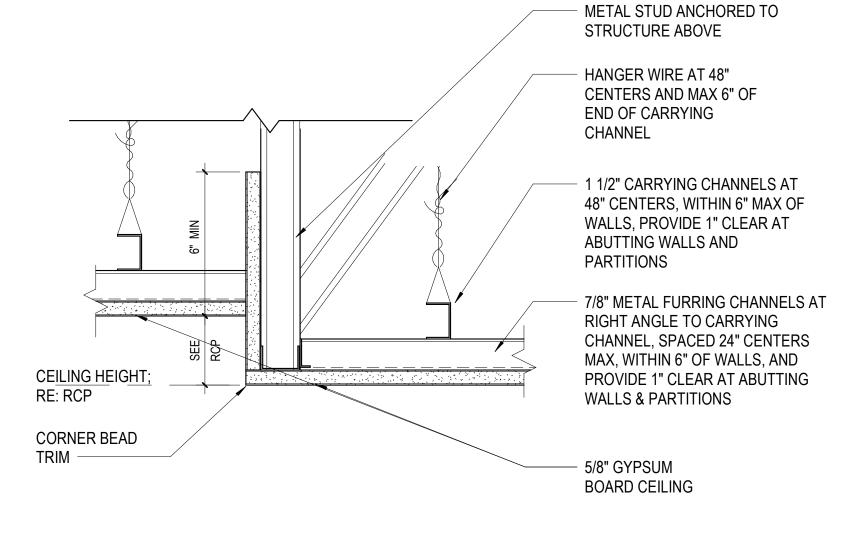

A1 SECTION DTL @ GYP CEILING 3'' = 1'-0''

-STRUCTURAL DECKING — 5/8" GYP BOARD ON METAL STUD FRAMING CEILING HEIGHT; RE: RCP —CORNER BEAD TRIM

A5 SECTION DTL GYP CEILING
1 1/2" = 1'-0"

A4 SECTION DTL @ GYP TO ACT

 $A2^{\frac{\text{SECTION DTL - GYP HEADER @ ACT}}{3" = 1'-0"}}$

DETAILS - CEILING HECKED BY: PROJECT NUMBER 236002-02

RAWING TITLE

STONE LEGEND

DESIGNATION KEY:

X-XX-XX

MATERIALS:
E - ENTRANCES
F - FACADES
S - SITE ELEMENTS
T - TRIM

TYPE

		STONE SCHEDULE	
STONE	CTONE TYPE	DECODIDATION	DETAIL PROFIL
NUMBER	STONE TYPE	DESCRIPTION	PROFIL
C-1212			
T03-LS	C-1212	QUARTZ RESTROOM VANITY	
ENTRANCE E-01-LS	ENTRANCE	WEST LIMESTONE ENTRANCE SURROUND - PLINTH	B1 / A5.42
E-01-LS E-02-LS	ENTRANCE	WEST LIMESTONE ENTRANCE SURROUND - PLINTH WEST LIMESTONE ENTRANCE SURROUND - JAMB	B1 / A5.42
E-02-LS E-03-LS	ENTRANCE	WEST LIMESTONE ENTRANCE SURROUND - HEAD 01	B1 / A5.42
E-03-LS E-04-LS	ENTRANCE	WEST LIMESTONE ENTRANCE SURROUND - HEAD 02	B1 / A5.42
E-04-L3	ENTRANCE	WEST LIMESTONE ENTRANCE SURROUND - FIEAD 02	D1/A3.42
ENTRANCES			
A-07-LS	ENTRANCES	LIMESTONE ENTRANCE SURROUND - SOFFIT PANEL	B1 / A2.22
A-12-LS	ENTRANCES	LIMESTONE ENTRANCE DOOR FRAME - HEAD	B2 / A2.22
	FACADE FACADE	LIMESTONE HEAD @ LARGE WINDOW SURROUND LIMESTONE SILL - TYPICAL	B2 / A5.42 B2 / A5.42
F-02-LS	FACADE	LIMESTONE SILL - TYPICAL	B2 / A5.42
F-03-LS	FACADE	LIMESTONE SILL - TYPICAL	B2 / A5.42
F-04-LS	FACADE	<varies></varies>	B2 / A5.42
F-05-LS	FACADE	LIMESTONE SILL - TYPICAL	B2 / A5.42
F-08-LS	FACADE	LIMESTONE JAMB @ LARGE WINDOW SURROUND	B2 / A5.42
F-09-LS	FACADE	LIMESTONE - MOUNTING PANEL	B4 / A5.42
F-10-LS	FACADE	LIMESTONE - MOUNTING PANEL	B4 / A5.42
SITE			
S-01-LS	SITE	LIMESTONE SITE PIER CAP	A1 / A1.02
S-02-LS	SITE	LIMESTONE SITE WALL CAP	A2 / A1.02
S-03-LS	SITE	LIMESTONE SITE WALL CAP	A6 / A1.02
<u> </u>		1	1 12 / / 11192
TRIM			
TRIM T-01-LS	TRIM	LIMESTONE - TYPICAL COPING	B2 / A5.42
	TRIM TRIM	LIMESTONE - TYPICAL COPING LIMESTONE - TYPICAL CORNICE	B2 / A5.42 B2 / A5.42

and precautions is nonnection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract Documents.

By DONALD C. SIMPSON

TORCHOGE OF EDUCATION & COLLEGE OF SIMPSON

TORCHOGE OF SIMPSON

TORCHOGE OF SIMPSON

TORCHOGE OF EDUCATION & COLLEGE OF SIMPSON

TORCHOGE OF SIMP

BAKERS ROW, Suite 100

60 14th Street South

Birmingham, AL 35233

205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this

Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs

written consent of the Architect is prohibited.

PACKAGE 'D'OWNER
UNIVERSITY C
COMMUNICA
DCM No. 2023453
PROJECT ADDRES
918 UNIVERS


PROJECT STATUS
ISSUED SET: BID SET
ISSUE DATE: 30 JAN 24
REVISIONS
No. Description Date

DRAWING TITLE
DETAILS - STONE
PROFILES


DRAWN BY: Au
CHECKED BY: Che


PROJECT NUMBER 236002-02

Δ5 4C

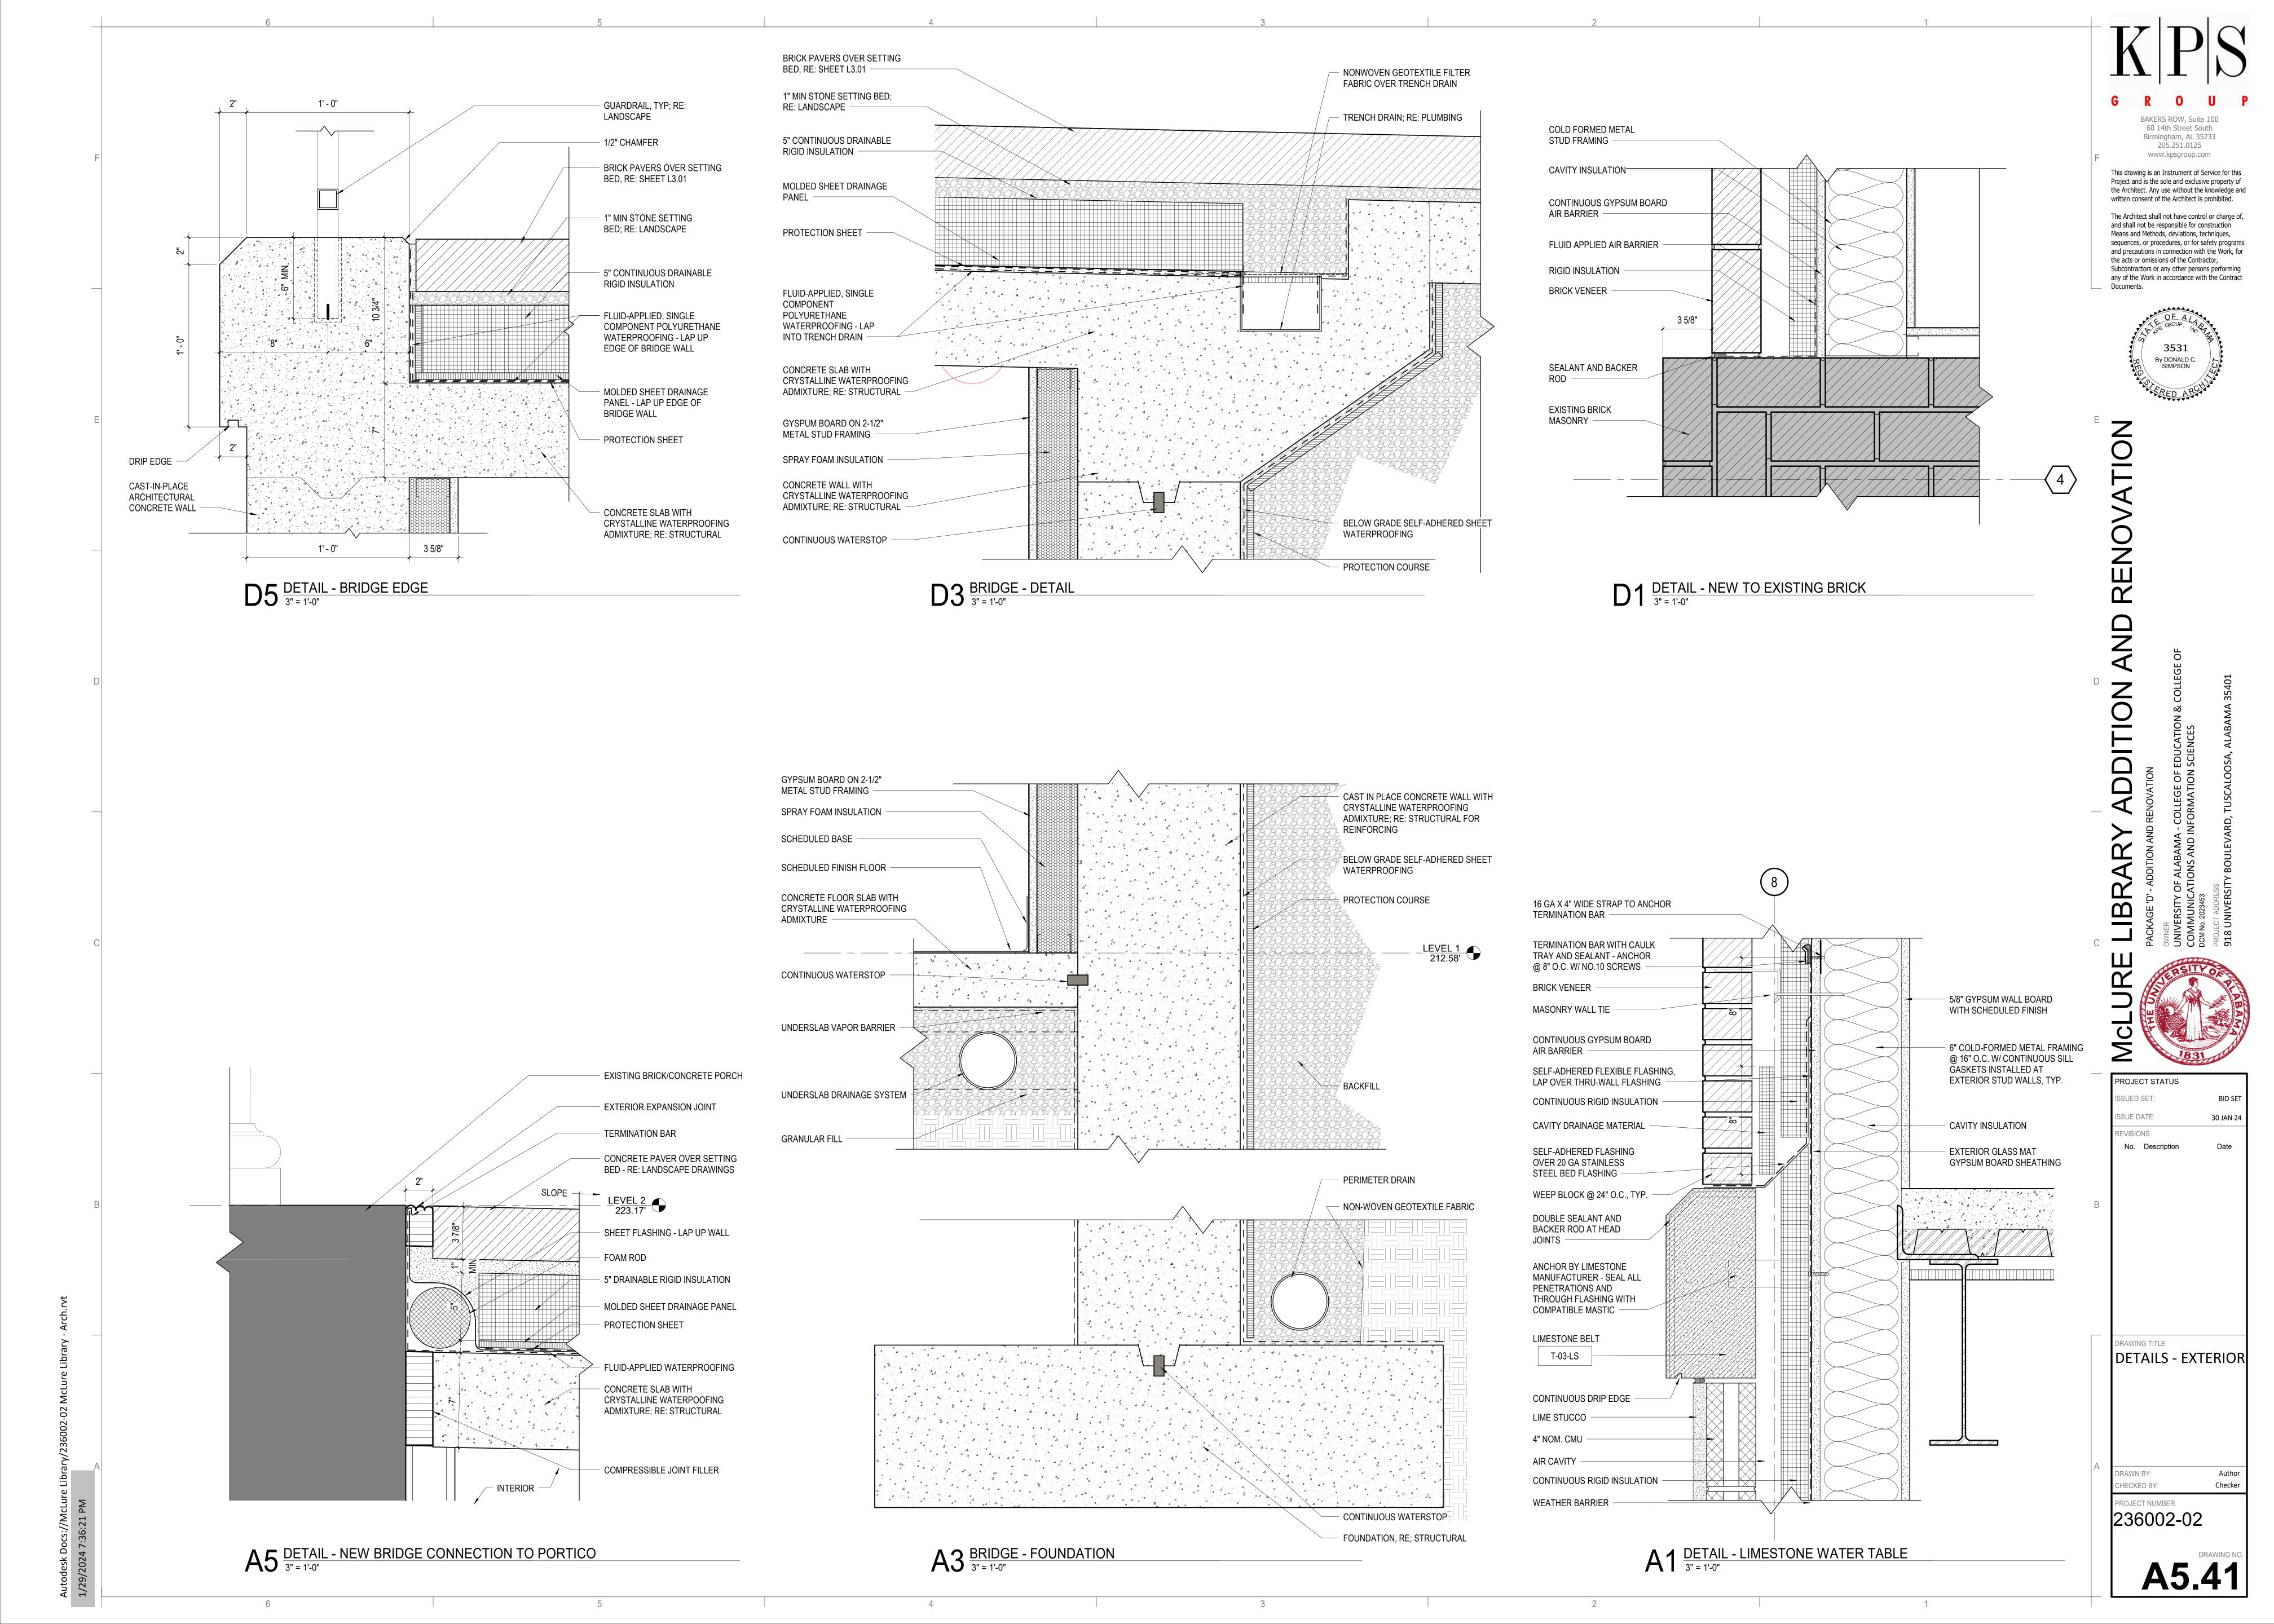

D1 DETAIL - HM DOOR HEAD EXISTING WALL
3" = 1'-0"

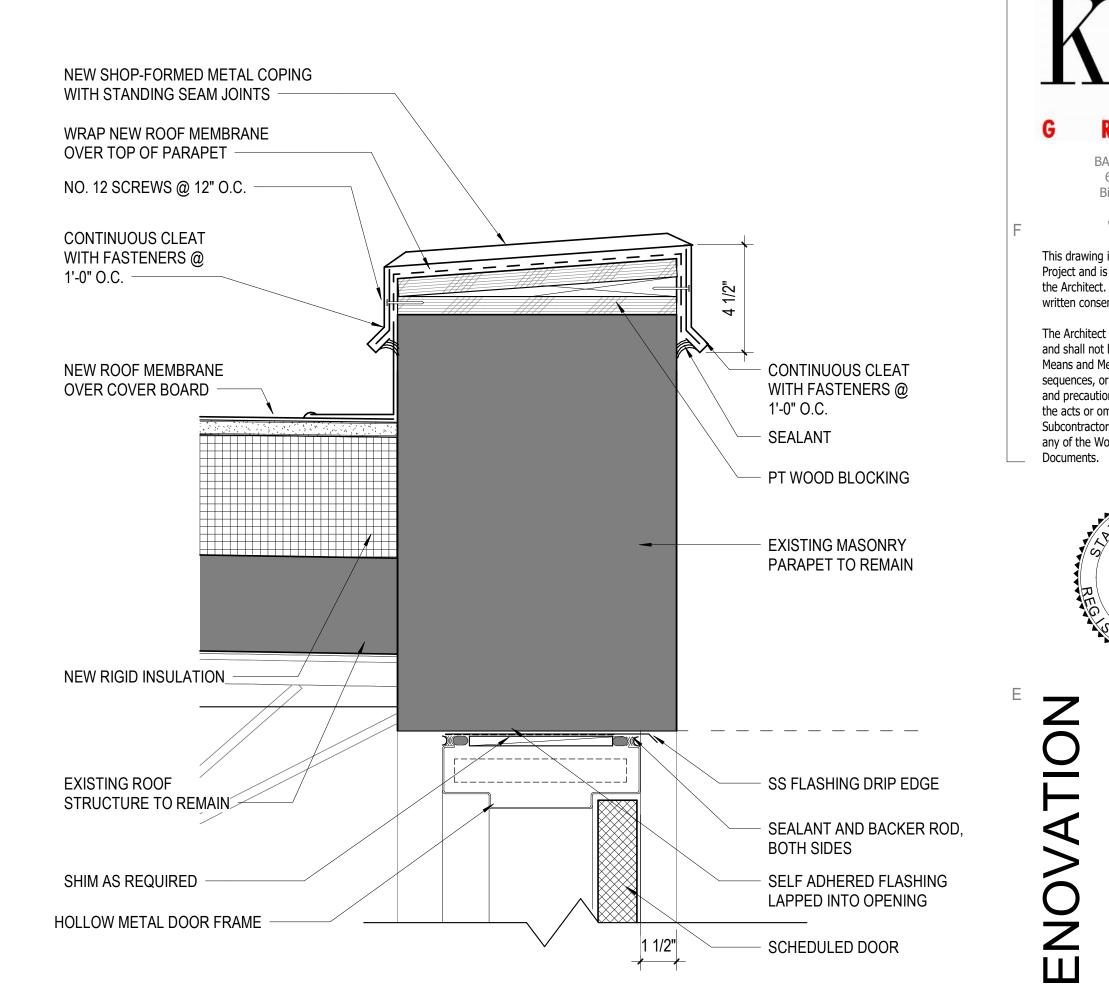

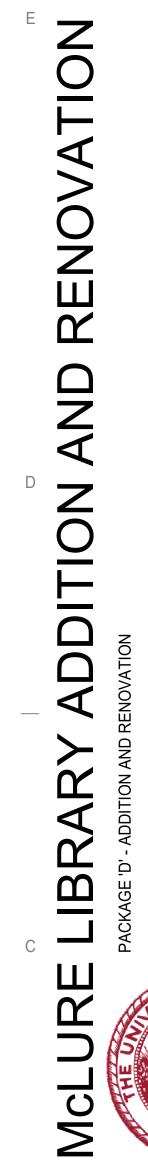


This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.


60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

> 3531 By DONALD C. SIMPSON

BAKERS ROW, Suite 100

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract

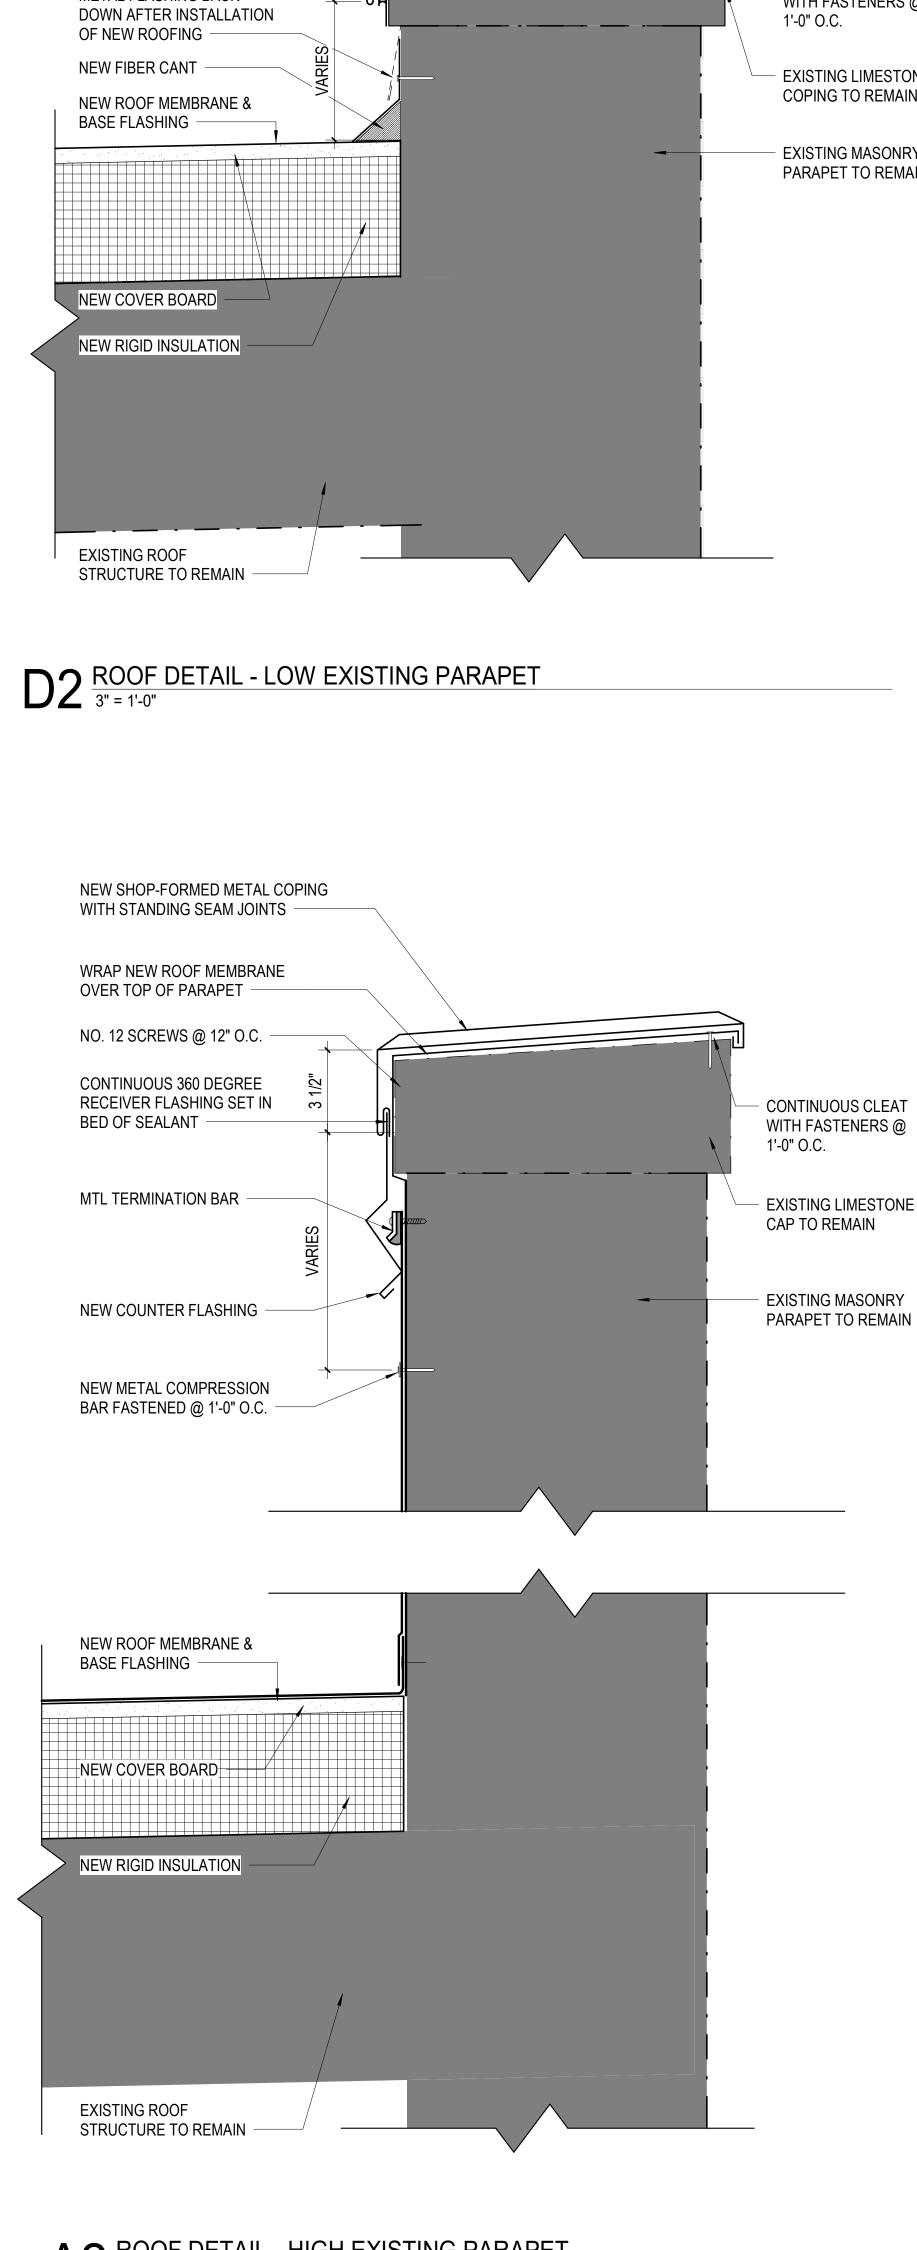

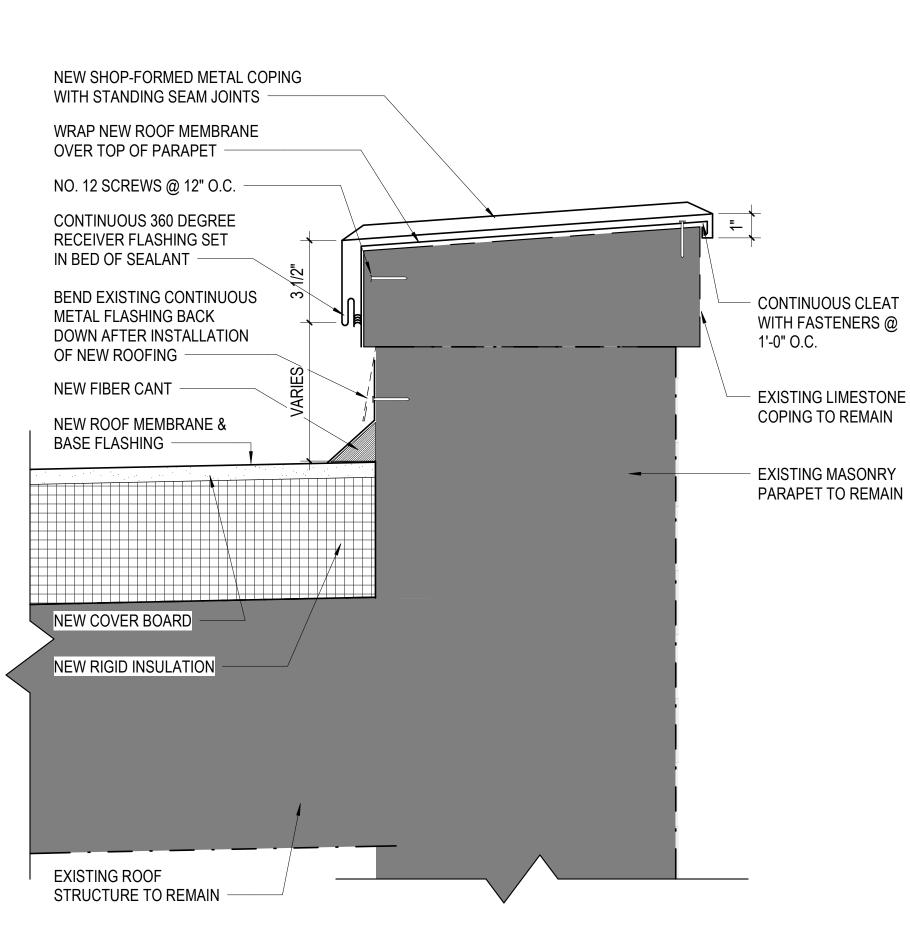

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233

205.251.0125

www.kpsgroup.com

This drawing is an Instrument of Service for this

Project and is the sole and exclusive property of

the Architect. Any use without the knowledge and

The Architect shall not have control or charge of,

sequences, or procedures, or for safety programs

and precautions in connection with the Work, for

Subcontractors or any other persons performing

any of the Work in accordance with the Contract

3531

By DONALD C. SIMPSON

written consent of the Architect is prohibited.

and shall not be responsible for construction

Means and Methods, deviations, techniques,

the acts or omissions of the Contractor,


PROJECT STATUS BID SET SSUED SET: SSUE DATE: 30 JAN 24 REVISIONS No. Description DETAILS - ROOF

HECKED BY: ROJECT NUMBER 236002-02

A2 ROOF DETAIL - HIGH EXISTING PARAPET

A6 ROOF DETAIL AT EXISTING UPPER FACADE $\frac{1}{3"} = 1'-0"$

 $A4 \frac{\text{WEST ENTRY AXON}}{1 \text{ 1/2"} = 1'-0"}$

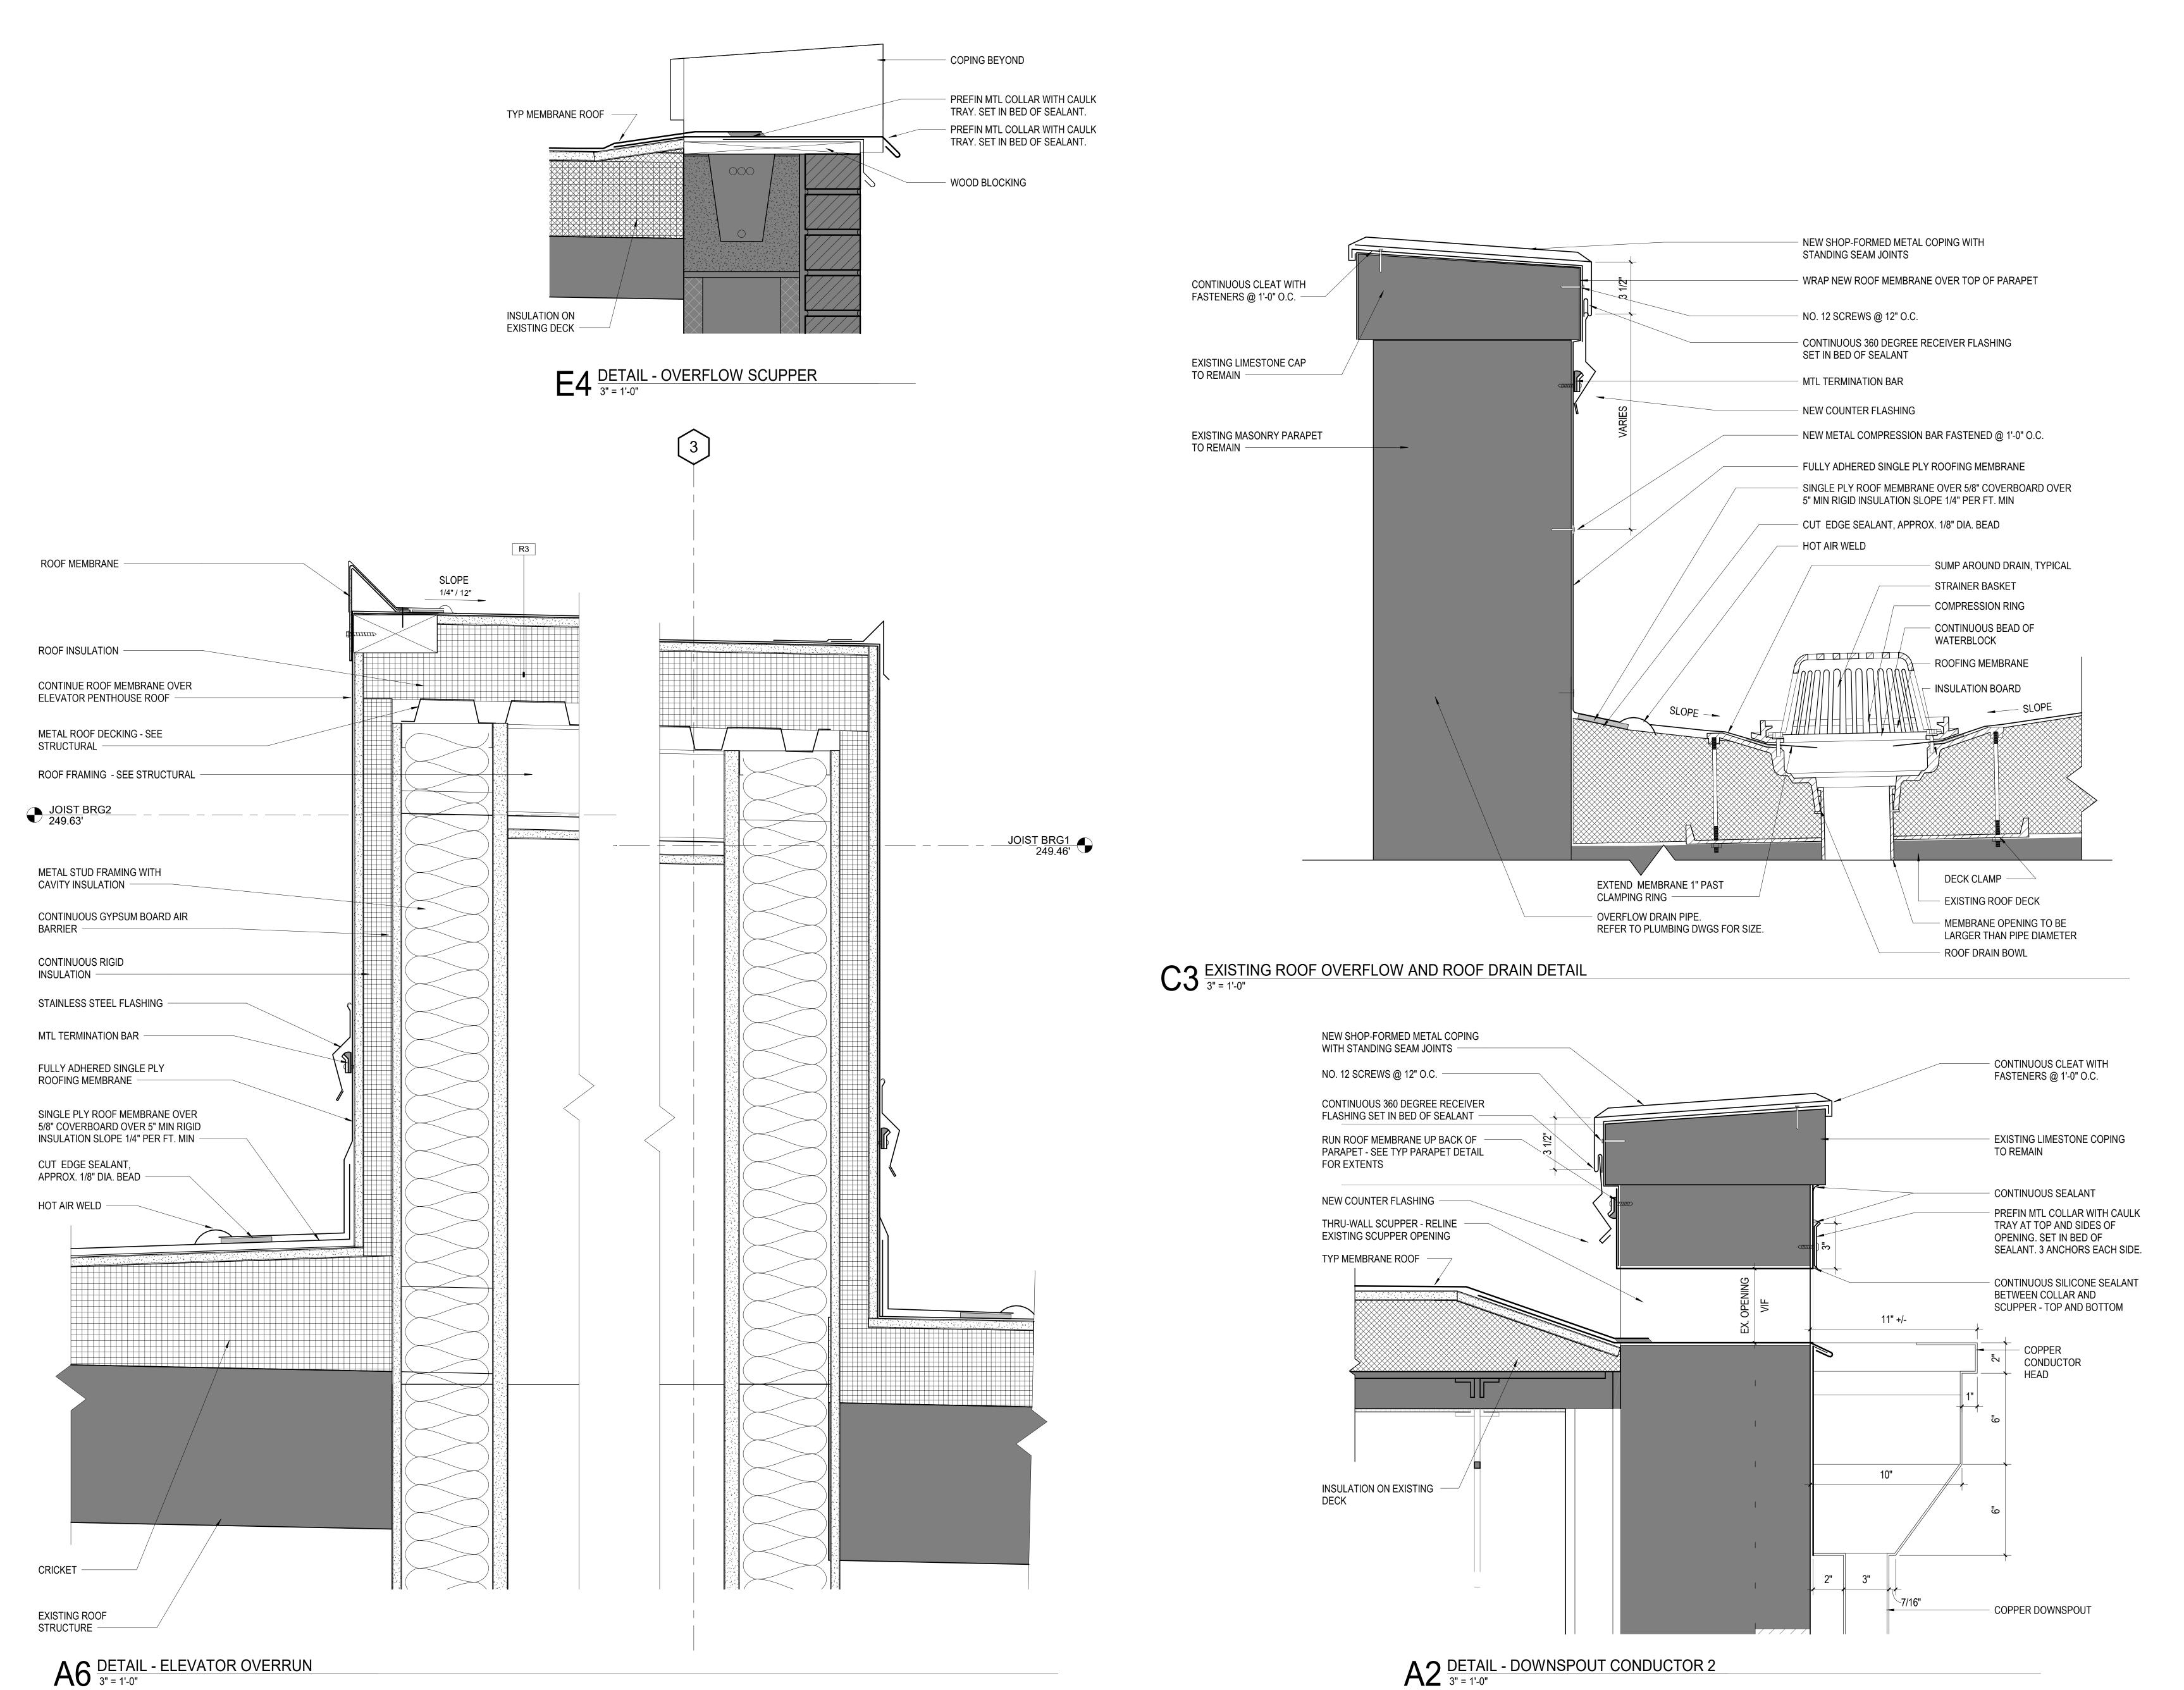



BAKERS ROW, Suite 100 60 14th Street South

Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.


The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract Documents.





PROJECT STATUS SSUED SET: BID SET SSUE DATE: 30 JAN 24 REVISIONS No. Description DETAILS - ROOF

ROJECT NUMBER 236002-02

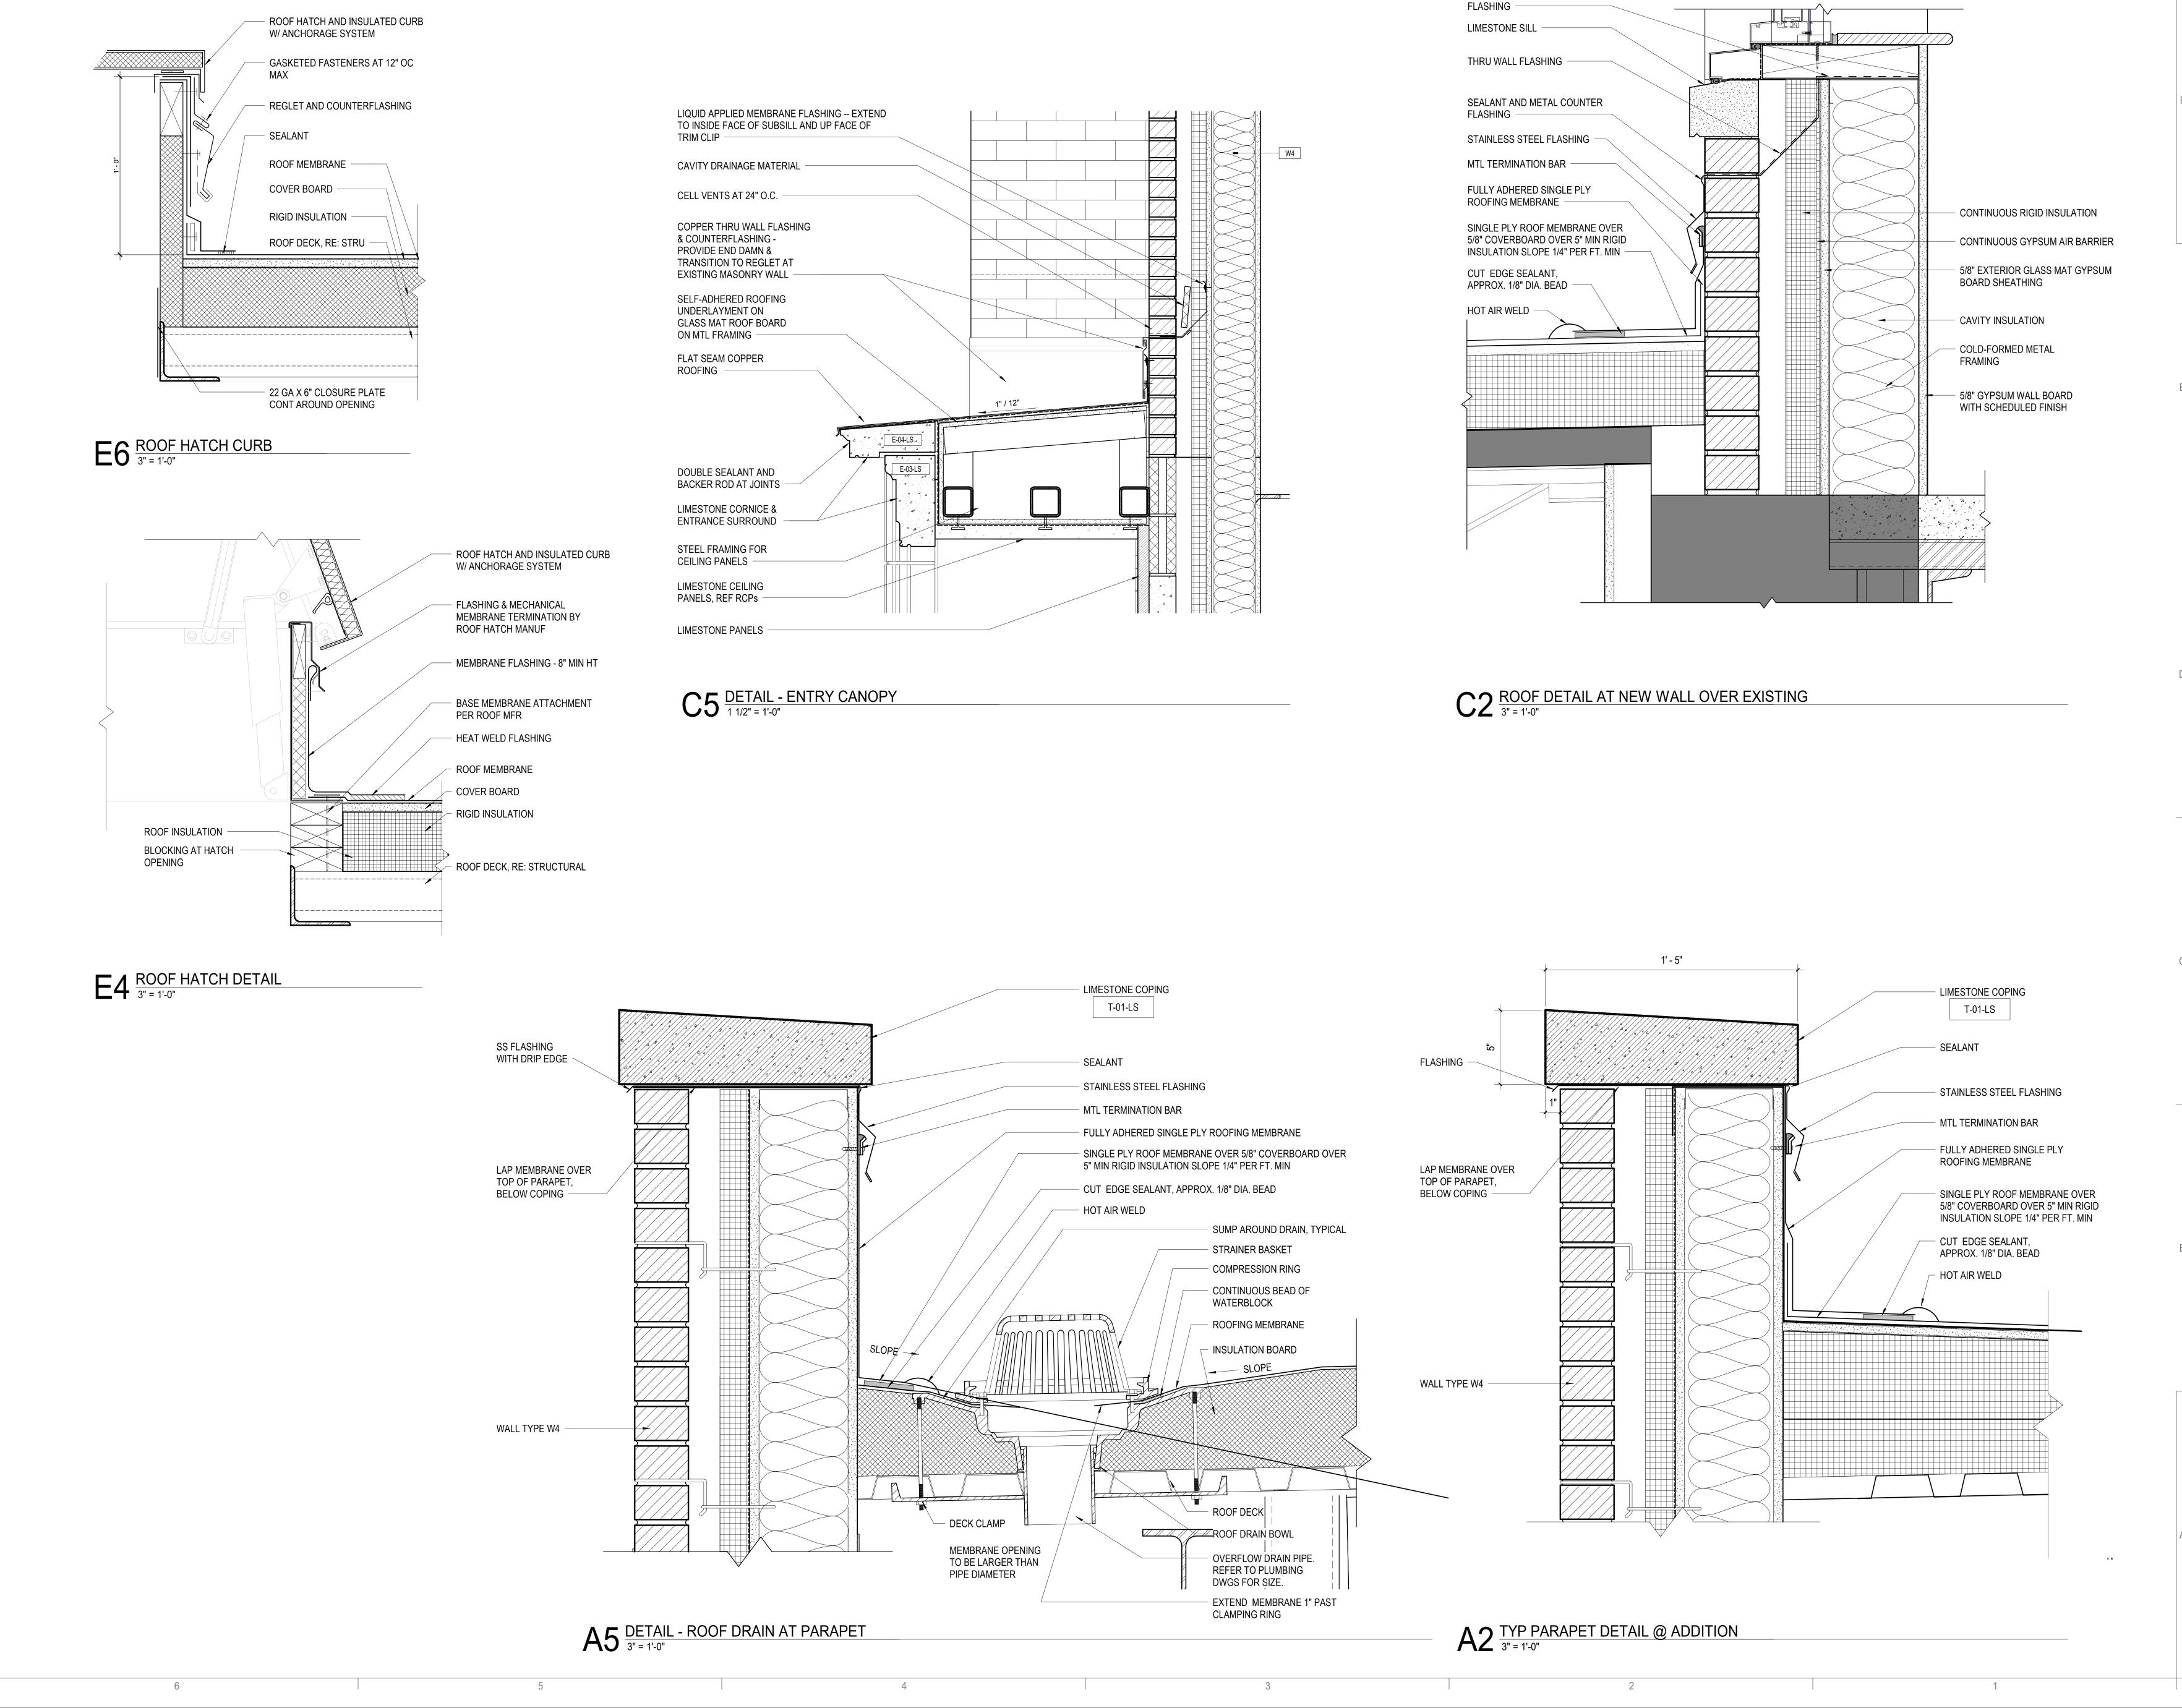

SELF-ADHERED MEMBRANE

RENOV IBR

PROJECT STATUS

No. Description

RAWING TITLE

ADDITION

DETAILS - ROOF AT

BID SET

30 JAN 24

SSUED SET:

SSUE DATE:

REVISIONS

Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited. The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor,

Subcontractors or any other persons performing

any of the Work in accordance with the Contract

3531

By DONALD C. SIMPSON

Documents.

Birmingham, AL 35233 205.251.0125 www.kpsgroup.com This drawing is an Instrument of Service for this


60 14th Street South

BAKERS ROW, Suite 100


HECKED BY: ROJECT NUMBER 236002-02

MARK	WID	тн	DESCRIPTION		SUFFIX
A2	7 1	1/4"	2 1/2" MTL STUDS	W/ 1" GAP	g - GLASS-MATT
A3	9 1	1/2"	3 5/8" MTL STUDS	W/ 1" GAP	I - LEAD LINED w - WATER-RESISTANT
A4	10 1	1/4"	4" MTL STUDS W/	1" GAP	
A6	1'-2 1	1/4"	6" MTL STUDS W/	1" GAP	

TYPE 'F' - WALL FURRING

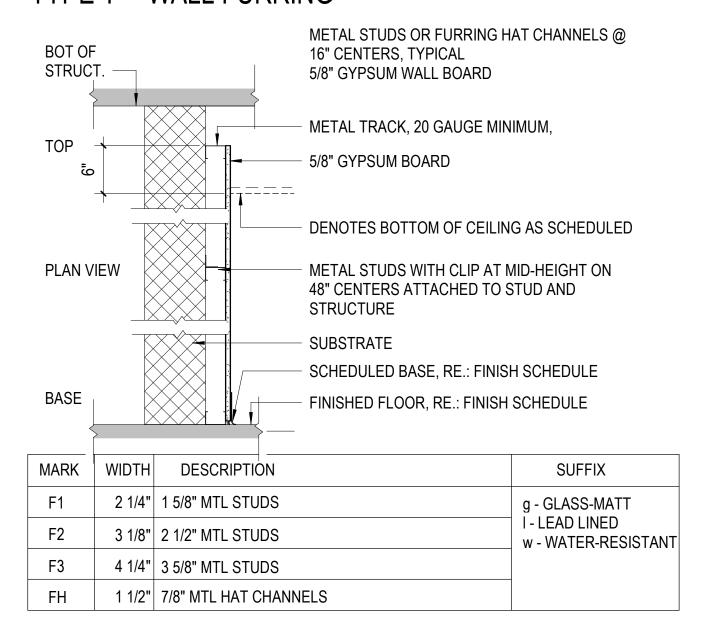


TYPE 'S' - STEEL STUDS, NON-BEARING GWB

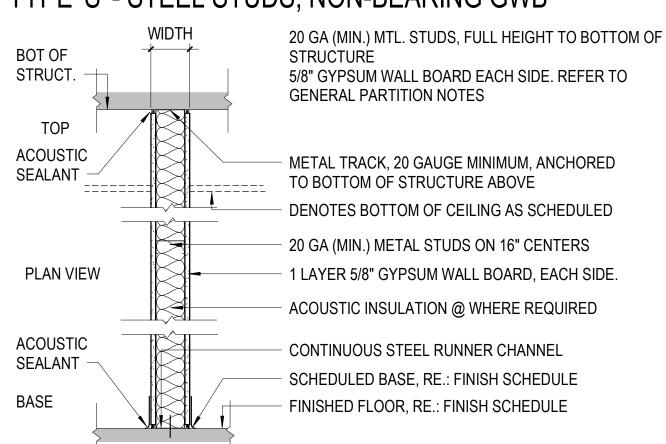


MARK	WIDTH	DESCRIPTION	SUFFIX
S2	3 1/4"	2-1/2" MTL STUDS	a - SOUND
S3	4 7/8"	3-5/8" MTL STUDS	g - GLASS-MATT I - LEAD LINED
S6	7 1/4"	6" MTL STUDS	w - WATER-RESISTANT
S8	9 1/4"	8" MTL STUDS	s - SMOKE BARRIER

TYPE 'F(X)' - FURRING, FIRE-RATED

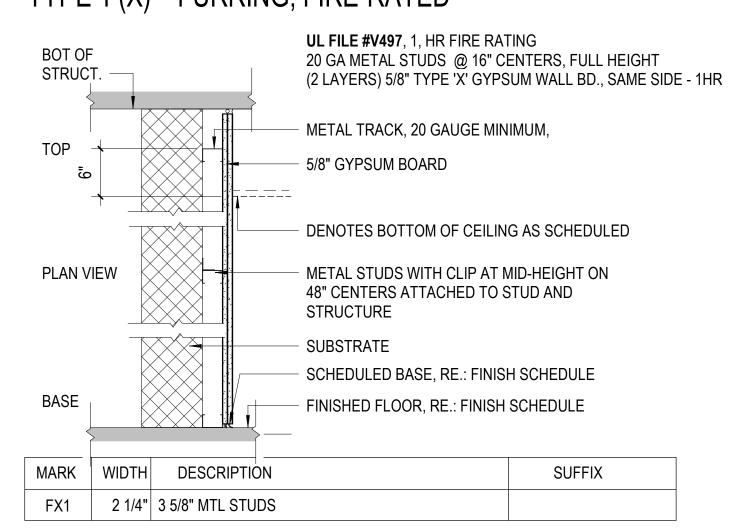


NOTE: NOT ALL WALL TYPES SHOWN MAY BE USED.

TYPE 'AF' - FIRE-RATED ACOUSTICAL PARTITION

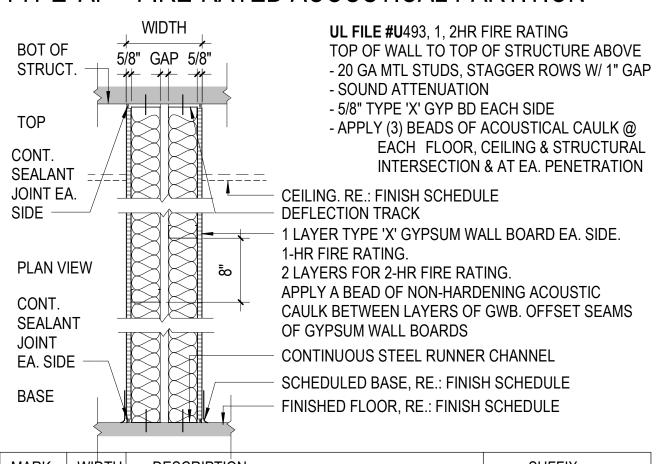


MARK	WIDT	H DESCRIPTION	DN	SUFFIX
AF2	7 1/4	4" 2 1/2" MTL STU	DS W/1" GAP	g - GLASS-MATT
AF3	9 1/2	2" 3 5/8" MTL STU	DS W/1" GAP	I - LEAD LINED w - WATER-RESISTANT
AF4	10 1/4	4" 4" MTL STUDS	W/ 1" GAP	
AF6	1'-2 1/4	4" 6" MTL STUDS	W/ 1" GAP	

TYPE 'H' - PARTIAL HEIGHT STEEL STUD PARTITION

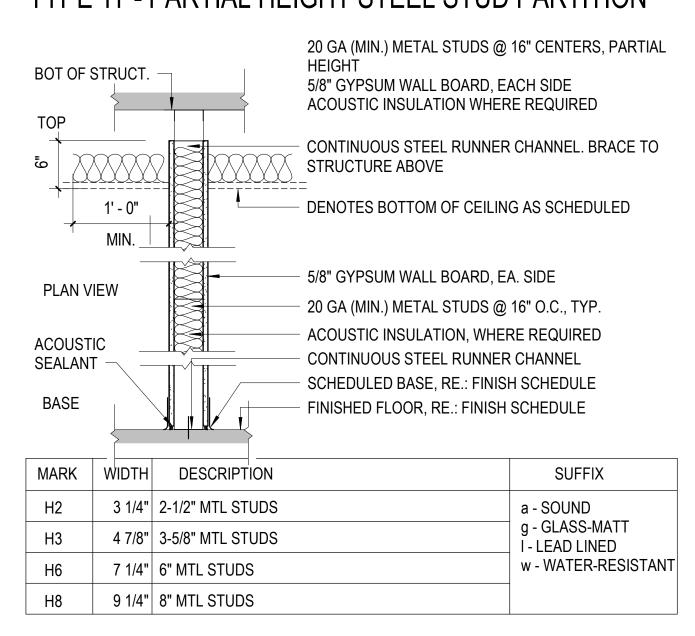


TYPE 'SH' - FIRE RATED SHAFT (CHASE) WALL

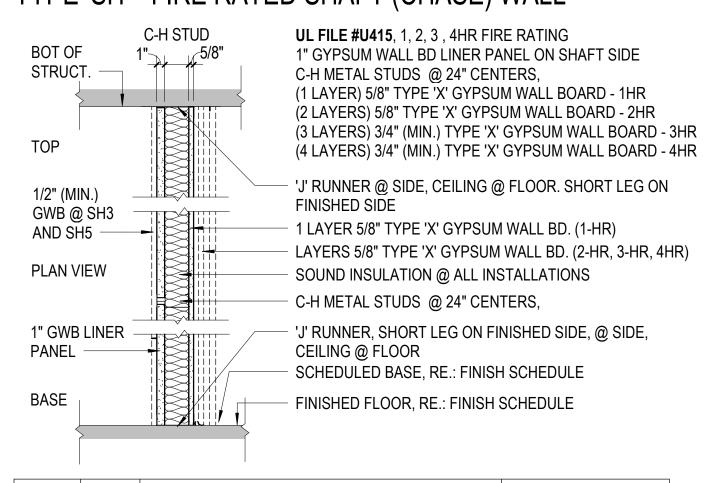


MARK	WIDTH	DESCRIPTION	SUFFIX
SH2/		2 1/2" MTL C-H STUDS, TYPE 'X' GWB FINISHED SIDE	g - GLASS-MATT
SH4/		4" MTL C-H STUDS, TYPE 'X' GWB FINISHED SIDE	I - LEAD LINED w - WATER-RESISTANT
SH3/		2 1/2" MTL. C-H STUDS, TYPE 'X' GWB EA. SIDE	
SH5/		4" MTL C-H STUDS, TYPE 'X' GWB EA. SIDE	
SH6/		6" MTL C-H STUDS, TYPE 'X' GWB EA. FINISHED SIDE	


TYPE 'C' - PLUMBING CHASE

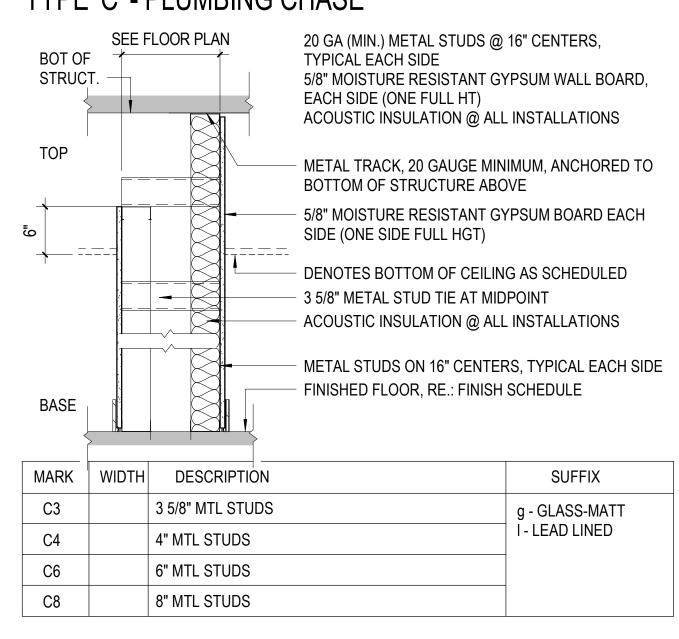

TYPE 'MF' - FIRE-RATED CONCRETE MASONRY

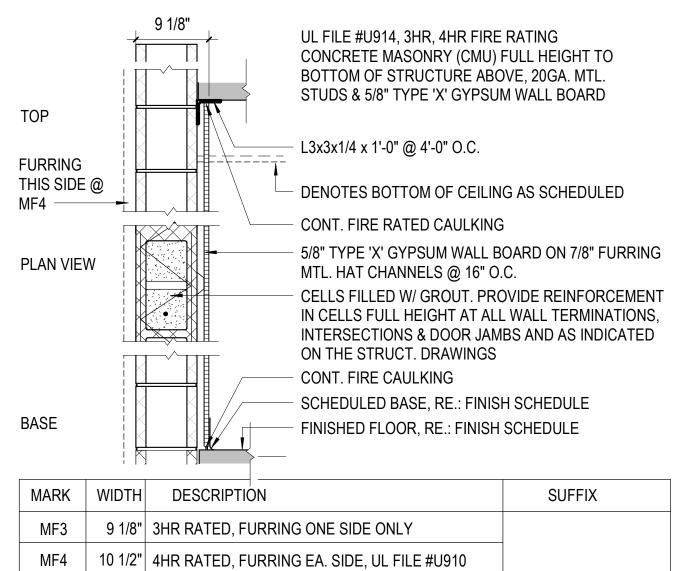

TYPE 'U' - FIRE RATED STEEL STUD PARTITION

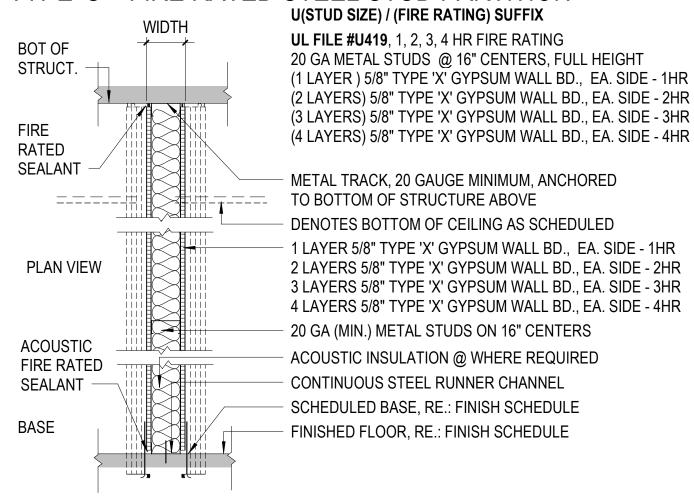

MARK	WIDTH	DESCRIPTION	SUFFIX
U1/		1 5/8" MTL STUDS - U1/1, U1/2, U1/3, U1/4	a - SOUND
U2/		2 1/2" MTL STUDS - U2/1, U2/2, U2/3, U2/4	g - GLASS-MATT I - LEAD LINED
U3/		3 5/8" MTL STUDS - U3/1, U3/2, U3/3, U3/4	w - WATER-RESISTAN
U6/		6" MTL STUDS - U4/1, U4/2, U4/3, U4/4	
U8/		8" MTL STUDS	

GENERAL MTL. STUD REQUIREMENTS:

REQUIREMENTS FOR GAUGES OF METAL STUDS EVEN WHEN STUD GAUGES ARE NOTED, THESE GAUGES SHALL BE CONSIDERED MINIMUM. THE CONTRACTOR SHALL PROVIDE AND INSTALL STUDS OF GAUGES AND CONFIGURATIONS AS RECOMMENDED BY THE STUD MANUFACTURER (EXCEPT WHERE REQUIREMENTS EXCEEDING THESE REQUIREMENTS ARE LISTED BELOW) TO MEET CONDITIONS INDICATED IN THESE DRAWINGS.

DEPTHS OF STUDS SHALL NOT BE CHANGED FROM THAT INDICATED ON THE DRAWINGS.

BRACING SHALL BE INSTALLED USING MATERIALS AND AT LOCATIONS AS RECOMMENDED BY THE STUD MANUFACTURER TO COMPLY WITH THE INDICATED. CONDITIONS, BUT IN NO CASE SHALL THIS BRACING:

BE LOCATED SO AS TO INTERFERE WITH ANY OTHER CONSTRUCTION. PROJECT BEYOND THE FINISH PLANES OF THE SPECIFIC CONSTRUCTION

GAUGES OF EXTERIOR STUDS SHALL PROVIDE ASSEMBLIES WHICH DO NOT

EXCEED THE FOLLOWING DEFLECTION CRITERIA: BRICK OR CMU VENEER: L/600

2. EIFS: L/360

GAUGES OF INTERIOR STUDS SHALL PROVIDE ASSEMBLIES THAT DO NOT EXCEED THE DEFLECTION CRITERIA OF L/240.

GENERAL PARTITION NOTES:

- FOR EXTERIOR WALLS SEE BUILDING AND WALL SECTIONS FOR CONSTRUCTION REQUIREMENTS.
- PARTITIONS SCHEDULED TO RECEIVE STONE VENEER ARE TO HAVE 16 GA. MIN. STUDS.
- ROOF DECK DEFLECTION: ALL PARTITIONS TERMINATING AT ROOF DECKS SHALL NOT BE ATTACHED TO ROOF DECKING AND SHOULD ACCOMMODATE 1/2" MINIMUM MOVEMENTS OF ROOF SYSTEM. SEE PARTITION DETAIL SHEET FOR TYPE OF JOINTS.
- PROVIDE MINIMUM TWO STUDS AT ALL DOOR AND WINDOW JAMBS FULL HEIGHT OF WALL AT ALL INTERIOR STUD PARTITIONS. REFER TO TYP. DETAILS ON THIS SHEET.
- TYPICAL IN PARTITION CAVITIES AT ALL WALL MOUNTED MILLWORK, CASEWORK, EQUIPMENT, GRAB BARS, ACCESSORIES ETC. PROVIDE FIRE RETARDANT WOOD BLOCKING AS REQUIRED TO SUIT THE INSTALLATION OF THE ITEM ANCHORED TO METAL STUDS ON 24 INCH CENTERS MAXIMUM. PROVIDE BLOCKING FULL WIDTH PLUS 12 INCHES PAST EACH END OF

CASEWORK OR EQUIPMENT THAT IS TO BE WALL MOUNTED OR ANCHORED PROVIDE ONE STUD AT EACH END OF THE BLOCKING TO SECURE ITEM TO THE PARTITION.

COORDINATE EXACT LOCATIONS OF WALL MOUNTED EQUIPMENT WITH OWNER OR EQUIPMENT PROVIDER. PARTITIONS SCHEDULED TO HAVE INSULATION ARE TO HAVE FULL

- ACOUSTICAL BATTS AND ARE TO BE SEALED WITH ACOUSTICAL SEALANT AT TOP, BOTTOM, AND AT PENETRATIONS. SEE PARTITION SCHEDULE.
- ALL INSULATION EXPOSED TO HVAC RETURN AIR PLENUMS SHALL COMPLY WITH BUILDING CODE FLAME SPREAD REQUIREMENTS.
- ALL WALLS REQUIRED TO BE FIRE RATED SHALL HAVE THE APPROPRIATE FIRE RATED GYPSUM BOARD INSTALLED IN ACCORDANCE WITH THE UL RATING CONSTRUCTION OF FIRE RATED WALLS SHALL BE IN STRICT ACCORDANCE WITH UL OR OTHER TEST LAB REQUIREMENTS.
- FIRE RATED DETAILS AND OTHER WALL RELATED DETAILS SHOWN ON THESE DOCUMENTS FOR THROUGH WALL PENETRATIONS IN FIRE RATED ASSEMBLIES PROVIDE BASIC REQUIREMENTS FOR VARIOUS PENETRATIONS. OBTAIN COMPLETE DETAIL INFORMATION FROM THE PRODUCT MANUFACTURER AND/OR THE LATEST EDITION OF THE UL DIRECTORY.
- PROVIDE 'MOISTURE RESISTANT' GYPSUM BOARD AT ALL LOCATIONS SUBJECT TO MOISTURE SUCH AS TOILETS, JANITOR CLOSETS, LOCKER ROOMS, ETC. SHOWER AREAS SHALL HAVE GLASS MATT WATER RESISTANT BACKING BOARD IN LIEU OF MOISTURE RESISTANT GYPSUM BOARD.
- 11. PARTITIONS SCHEDULED TO RECEIVE TILE OR STONE FINISHES ARE TO HAVE CEMENTITIOUS BACKERBOARD IN LIEU OF GYPSUM WALL BOARD.
- 12. INSTALL GYPSUM WALLBOARD 1/2" MINIMUM ABOVE FINISHED FLOOR.
- 13. CONTROL JOINTS SHALL BE PROVIDED IN ALL GYPSUM WALL BOARD PARTITIONS AND SHALL NOT EXCEED 30' CENTERS.CEILING JOINTS SHALL ALSO NOT EXCEED 30' CENTERS AND NO MORE THAN 900 SQUARE FEET IN
- 14. SEAL AROUND PERIMETER OF ALL FIRE AND SOUND RATED WALLS AND PARTITIONS IN ACCORDANCE WITH ALL FIRE AND STC RATINGS AND AS REQUIRED BY ALL APPLICABLE BUILDING CODES.
- 15. REFER TO ROOM FINISH SCHEDULE FOR WALL FINISHES.


PARTITION CLASSIFICATIONS & KEYS



BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

Γhe Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



SUED SET: **BID SET** SUE DATE: 30 JAN 24 EVISIONS No. Description

PROJECT STATUS

RAWING TITLE INTERIOR **PARTITIONS -**TYPES, NOTES &. DETAILS

PARTITION KEY

S2/al

PARTITION TYPE CLASSIFICATION

SUFFIX

WALL TYPES SUFFIX KEY

NOTES - PARTITION CLASSIFICATION

A ACOUSTICAL PARTITION

F FURRED

W WOOD

M MASONRY

S STEEL FRAMED


SH SHAFT (CHASE)


C PLUMBING (CHASE) WALL

a ADD SOUND ATTENUATION BLANKET OR AS OTHERWISE NOTED f FIRE RATED g SUBSTITUTE GLASS-MATT WATER RESISTANT BACKING BOARD (EACH SIDE) ON MINIMUM 20 GAUGE STEEL STUDS 16" OC I LINED WITH LEAD (EACH SIDE) W | SUBSTITUTE WATER RESISTANT GYPSUM BACKING BOARD (EACH SIDE) ON

MINIMUM 20 GAUGE STEEL STUDS AT 16" OC


RAWN BY: HECKED BY: ROJECT NUMBER 236002-02

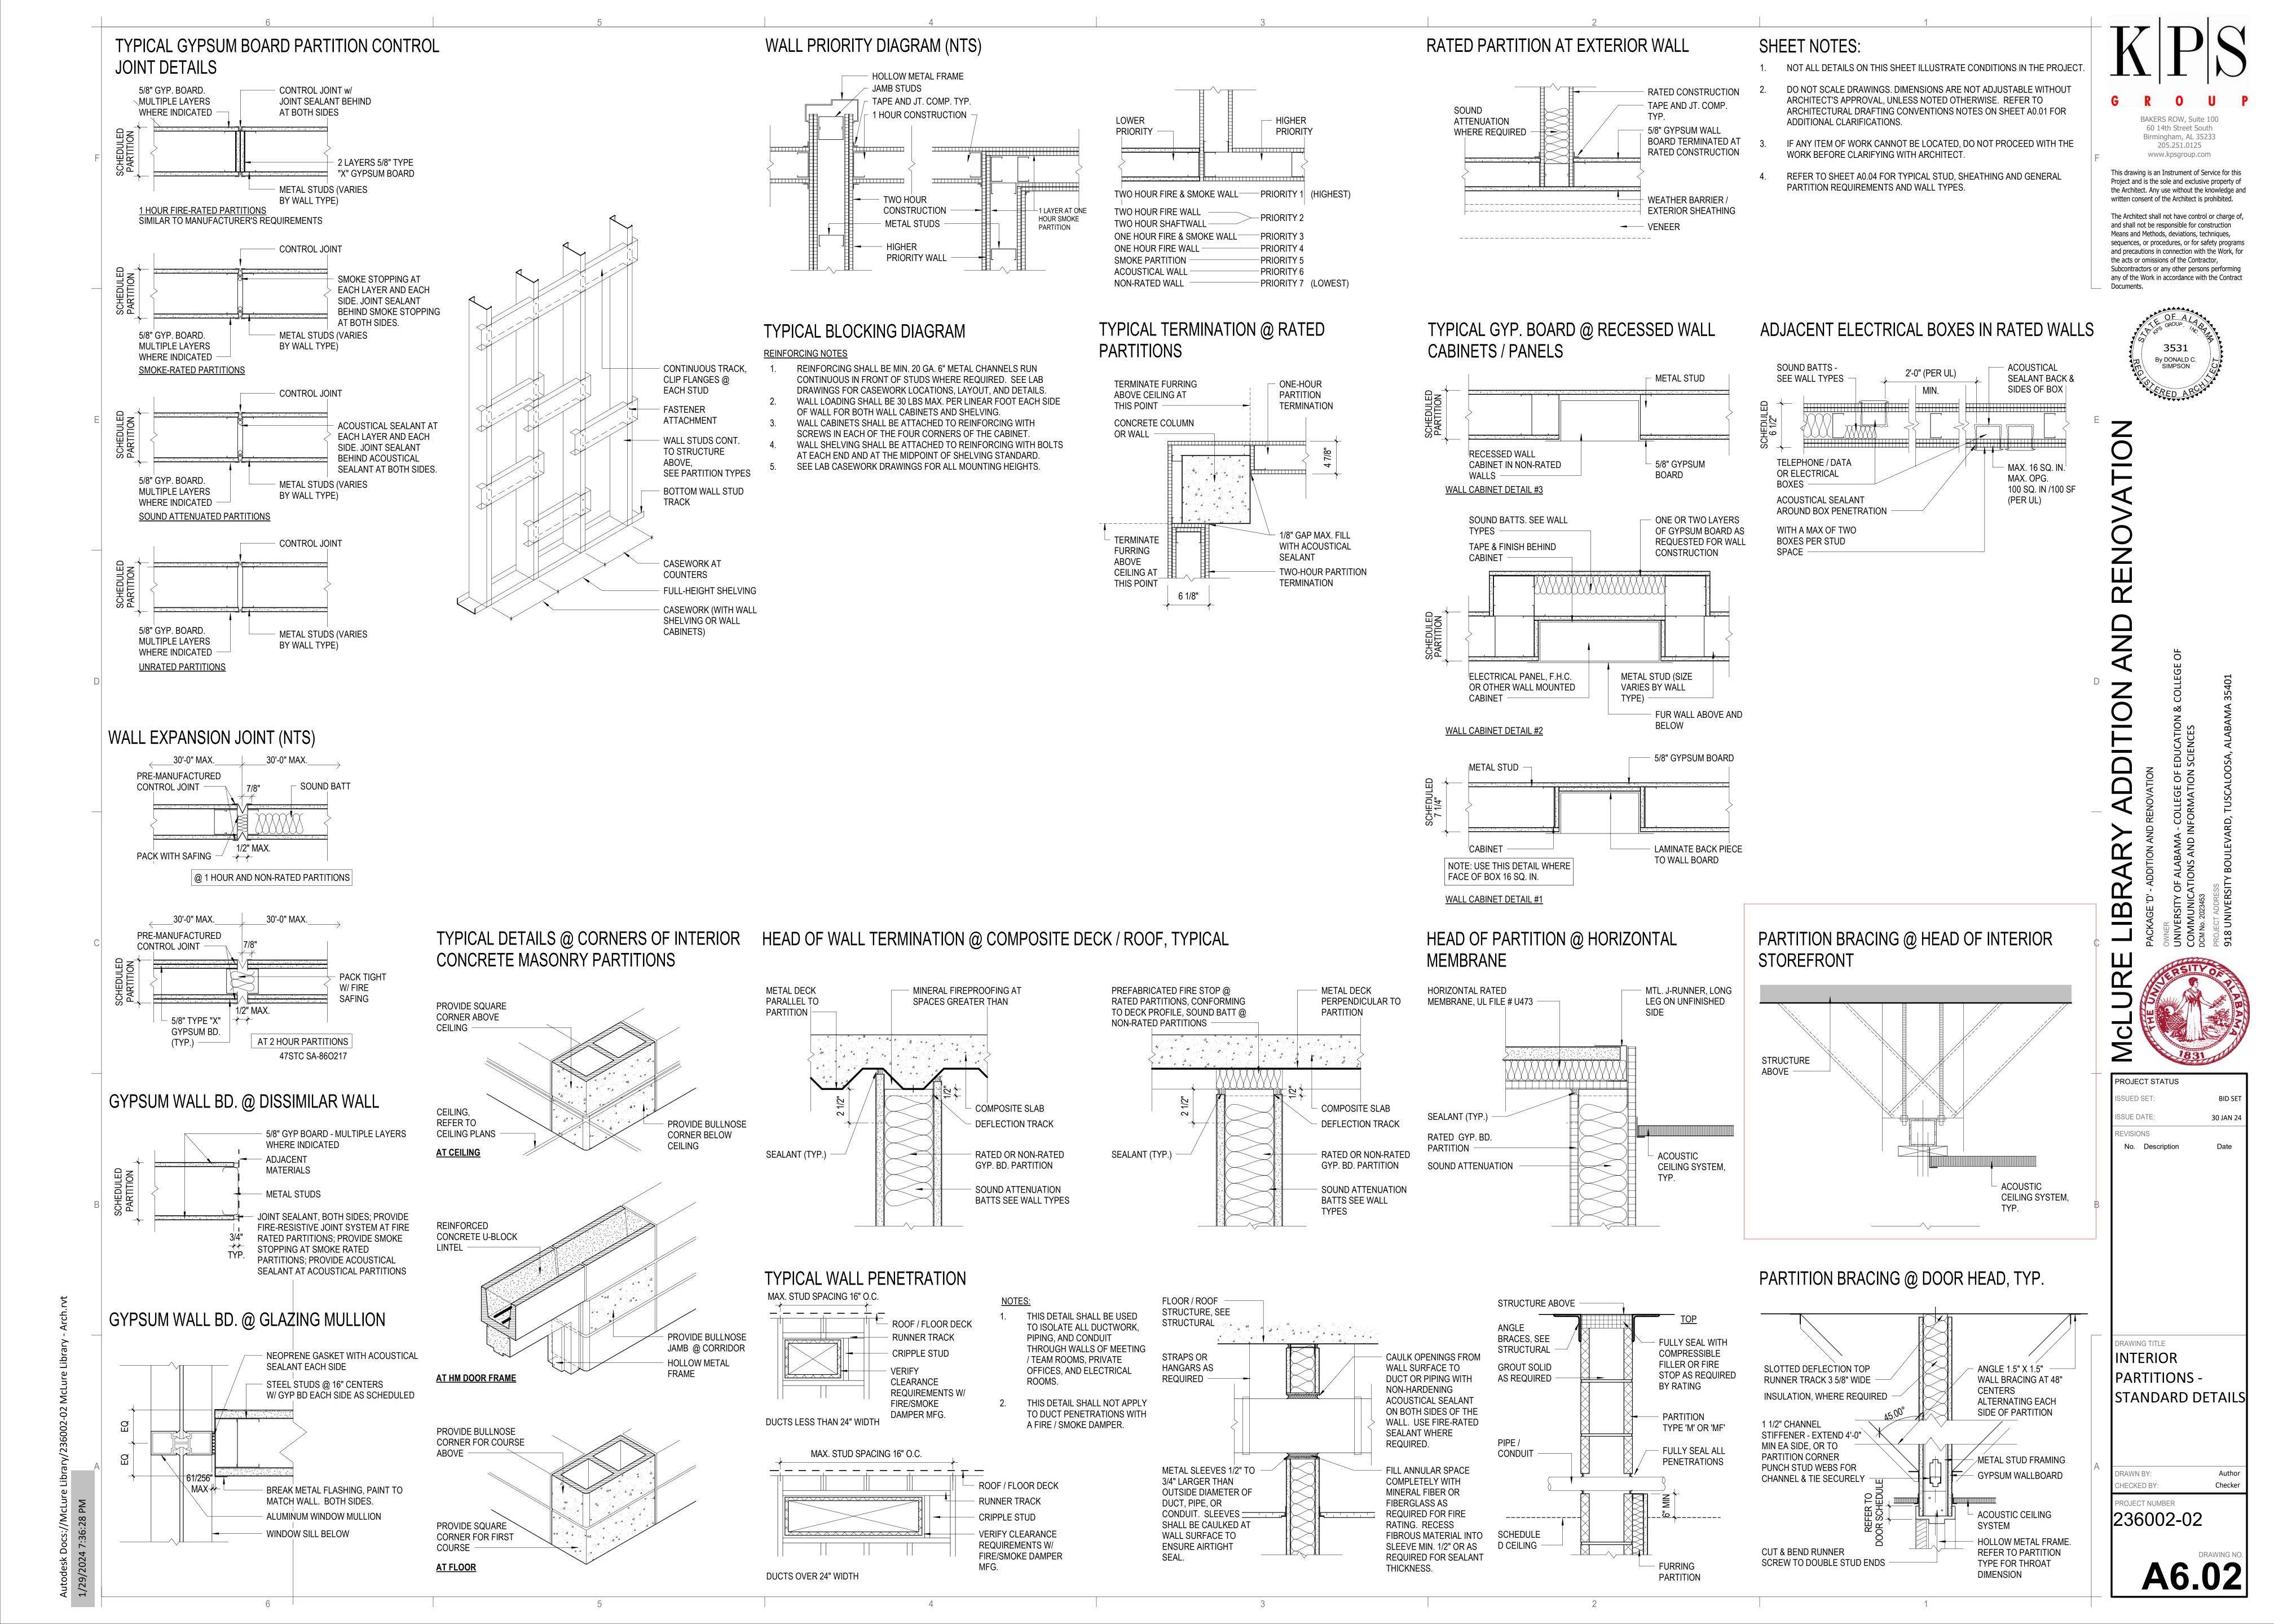


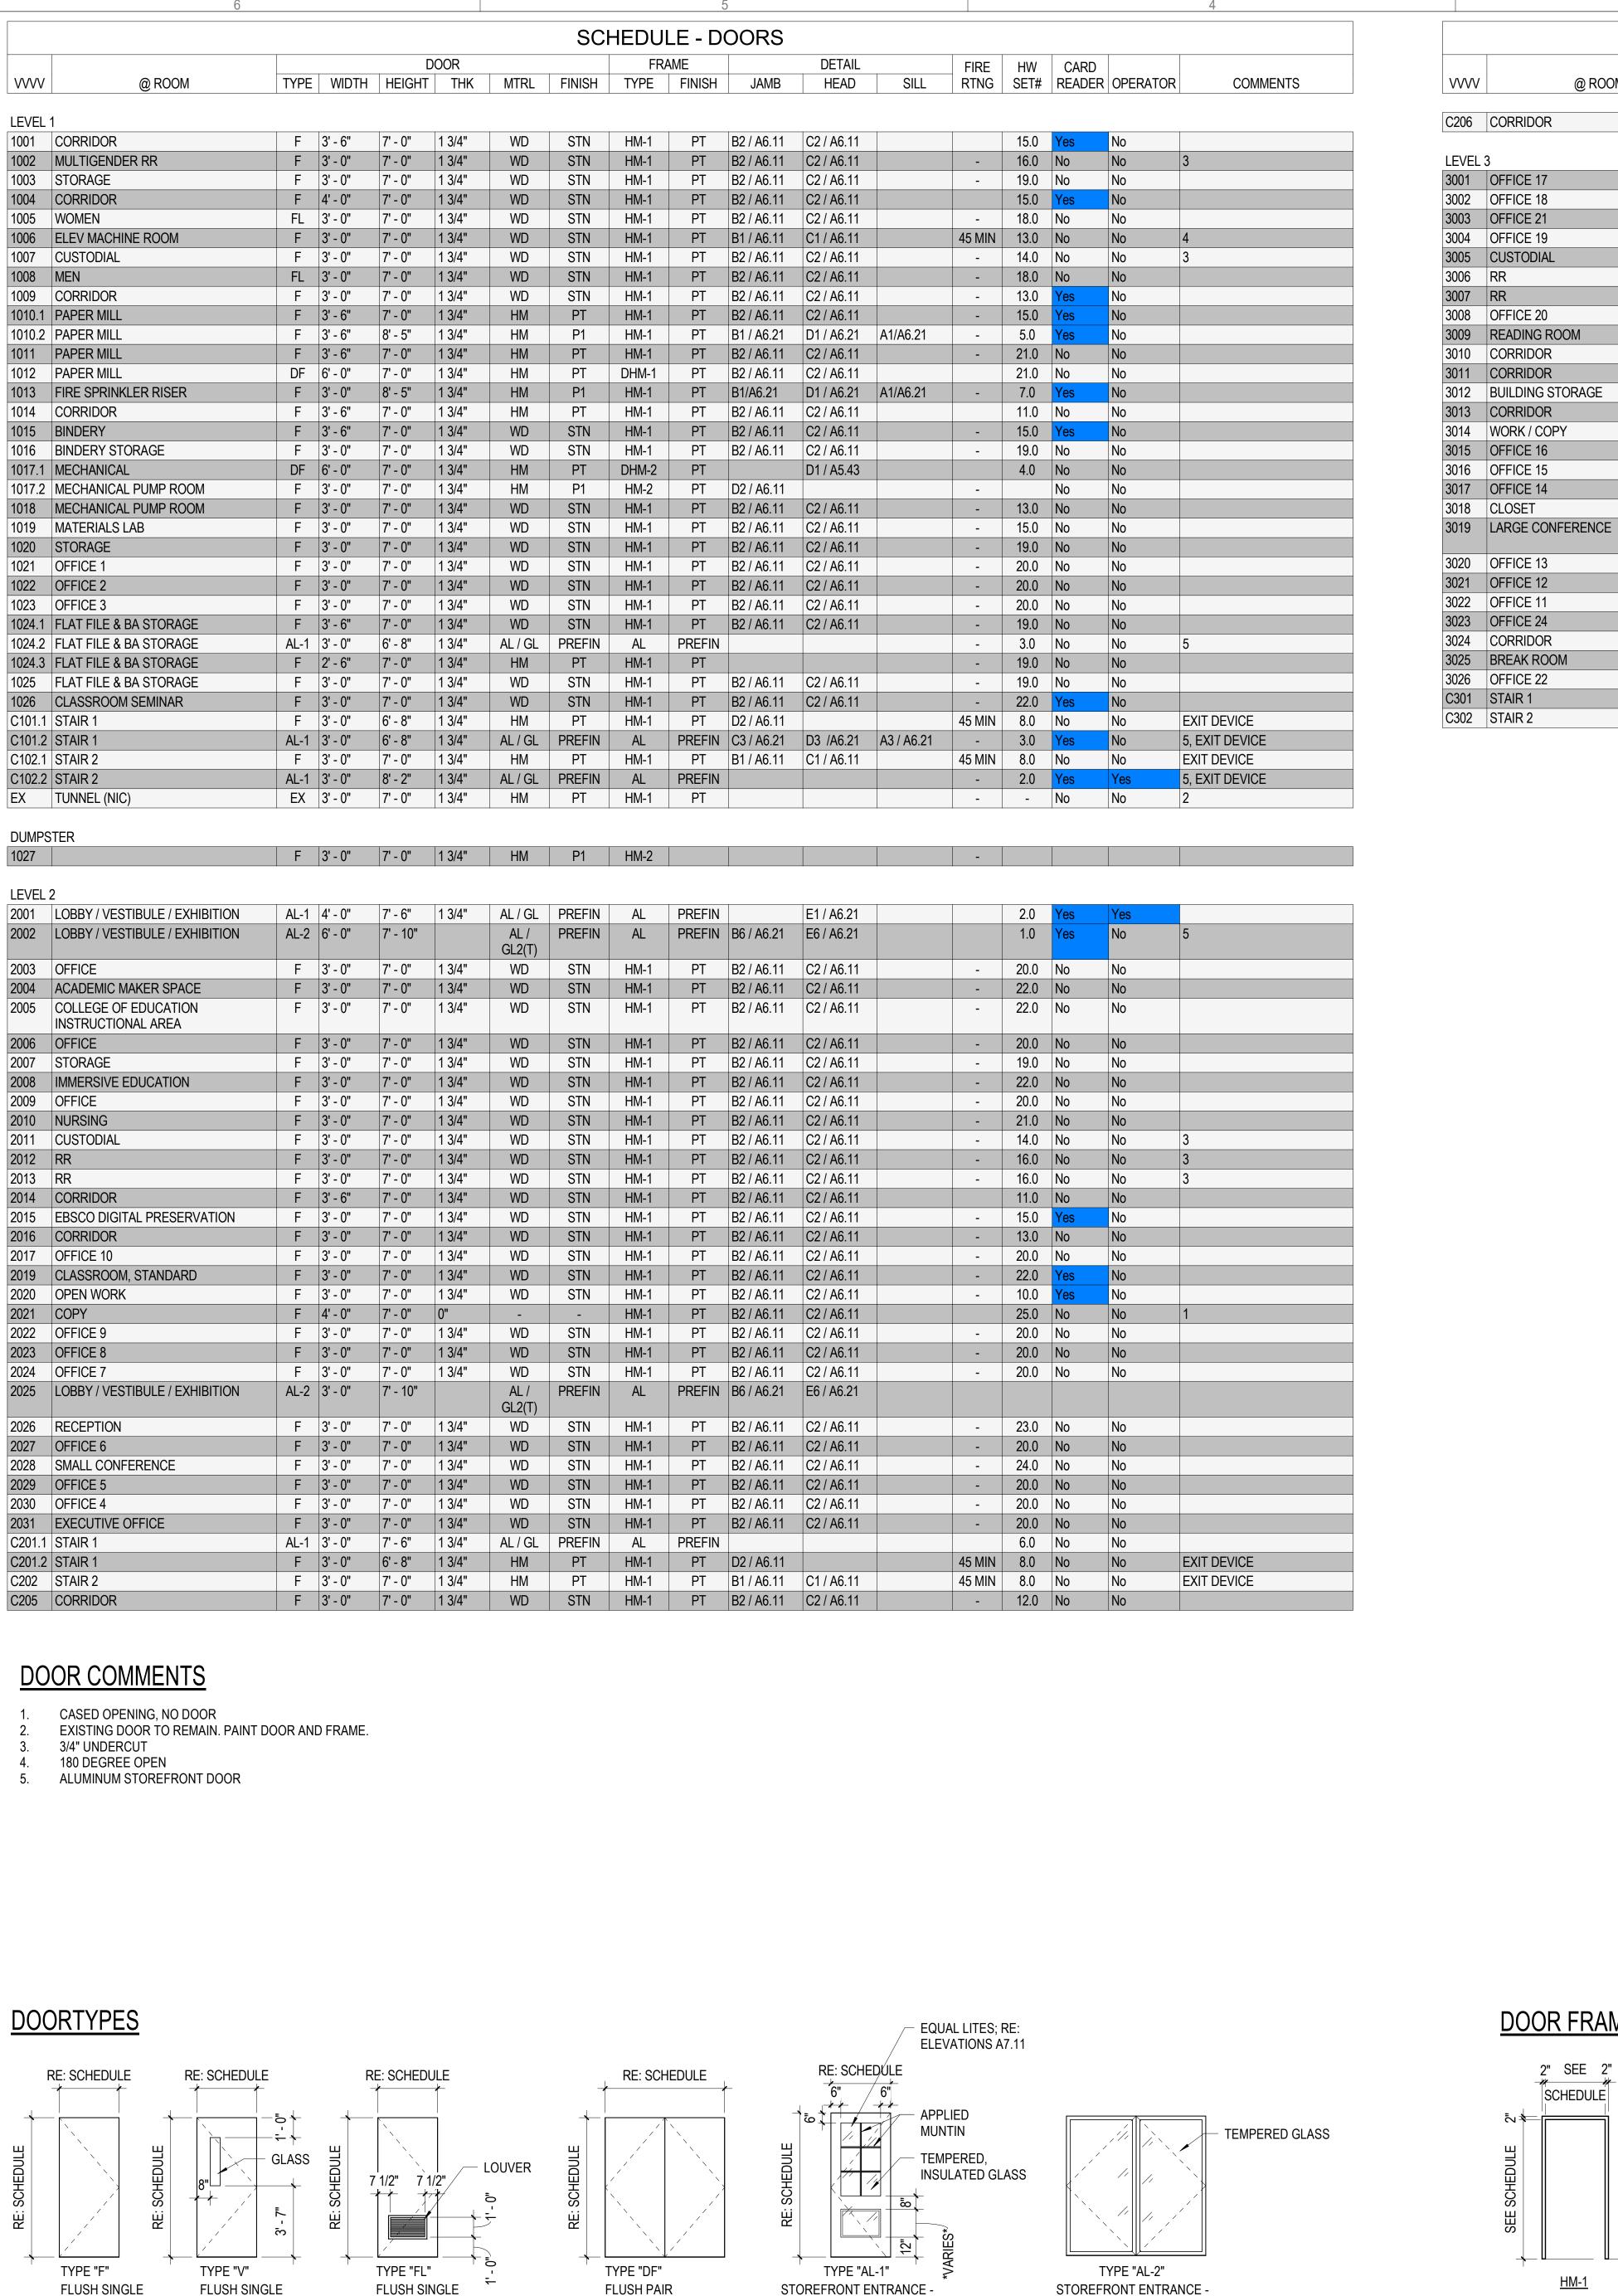


GLASSVISION

W/ LOUVER

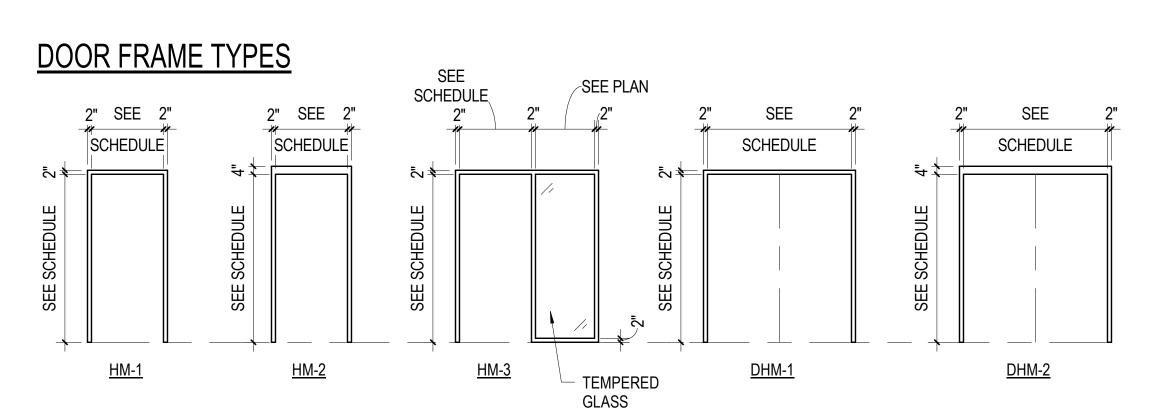


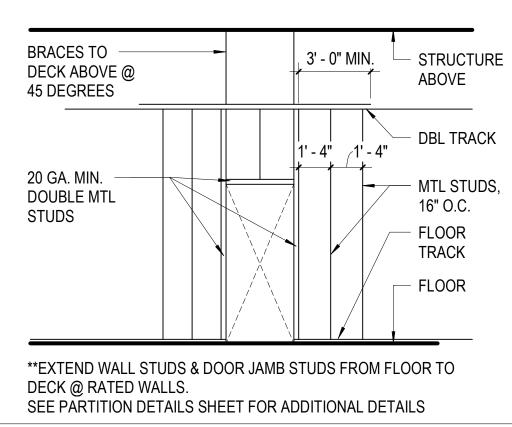





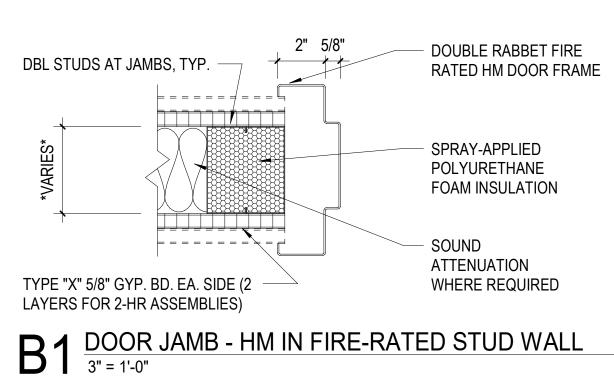




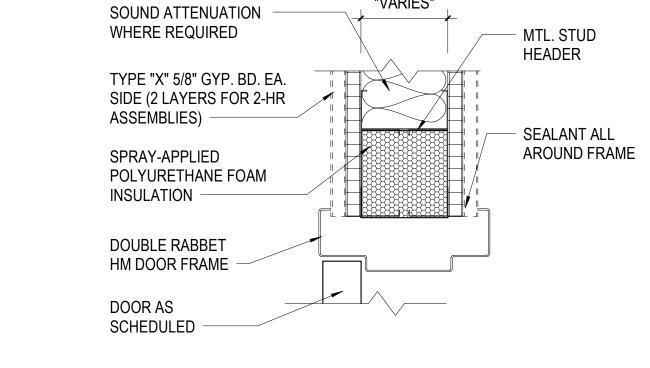


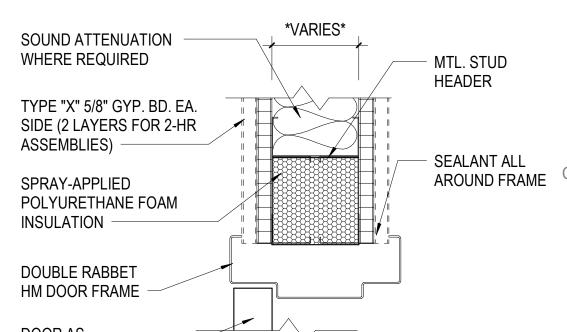


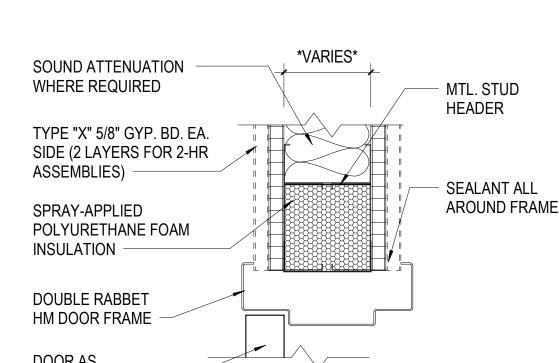

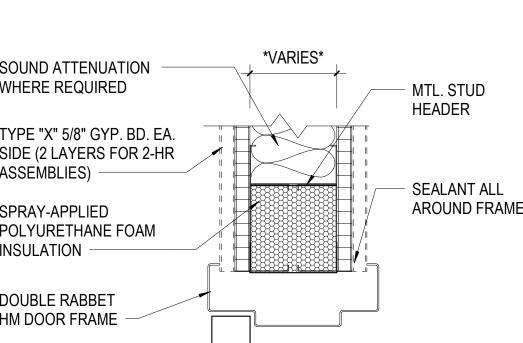



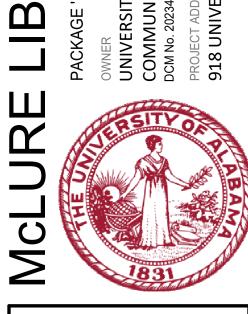

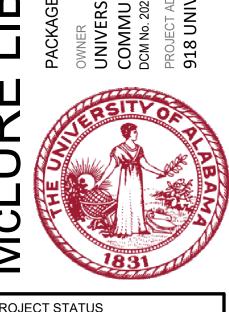

PROJECT STATUS SUED SET: SUE DATE: EVISIONS No. Description

30 JAN 24

SCHEDULE -DOORS, TYPES & **DETAILS**

HECKED BY: ROJECT NUMBER 236002-02

Checker

STOREFRONT ENTRANCE -

DOUBLE

SINGLE

F | 3' - 0" | 7' - 0" | 1 3/4"

DOOR @ ROOM TYPE | WIDTH | HEIGHT | THK | MTRL | FINISH | F | 3' - 0" | 7' - 0" | 1 3/4" | WD | STN | HM-1 | PT | B2 / A6.11 | C2 / A6.11 F 3' - 0" 7' - 0" 1 3/4" F | 3' - 0" | 7' - 0" | 1 3/4" F | 3' - 0" | 7' - 0" | 1 3/4"

F 3' - 0" 7' - 0" 1 3/4"

F | 3' - 0" | 7' - 0" | 1 3/4"

F | 3' - 0" | 7' - 0" | 1 3/4"

F | 3' - 0" | 8' - 0" | 1 3/4"

F 3' - 0" 7' - 0" 1 3/4"

F | 3' - 6" | 7' - 0" | 1 3/4"

F | 3' - 6" | 7' - 0" | 1 3/4"

F | 3' - 0" | 7' - 0" | 1 3/4"

- | 3' - 0" | 7' - 0" | 1 3/4"

F | 3' - 0" | 7' - 0" | 1 3/4"

F | 3' - 0" | 7' - 0" | 1 3/4"

F | 3' - 0" | 7' - 0" | 1 3/4"

F 3' - 0" 7' - 0" 1 3/4"

F 3' - 0" 7' - 0" 1 3/4"

F | 3' - 0" | 7' - 0" | 1 3/4"

F | 3' - 0" | 7' - 0" | 1 3/4"

F | 3' - 0" | 6' - 8" | 1 3/4"

F | 3' - 0" | 7' - 0" | 1 3/4"

F |3' - 0" |7' - 0"

F | 3' - 0" | 7' - 0"

PT B2 / A6.11 C2 / A6.11 STN HM-1 PT B2 / A6.11 C2 / A6.11 WD

STN

STN

STN

STN

STN

STN

STN

STN

STN

STN HM-1

STN HM-1

PT HM-1

HM-1

HM-1

HM-1

HM-1

HM-1

HM-1

WD

WD

WD

WD

WD

WD/

GL2(T)

WD

WD

WD

WD

HM

(2) LAYERS "TYPE X"

MTL. STUD FRAMING

EXISTING MASONRY WALI

SOUND ATTENUATION

WHERE REQUIRED

5/8" GYP. BD. EA. SIDE

POLYURETHANE FOAM

OF METAL STUDS

SPRAY-APPLIED

DOUBLE RABBET

HM DOOR FRAME

SEALANT EACH SIDE

DBL. STUDS AT JAMBS, TYP.

5/8" GYP. BD. EA. SIDE OF

3 5/8" METAL STUDS

DOOR AS

SCHEDULED

INSULATION

5/8"GYPSUM WALL BD ON 3 5/8"

- | -

SCHEDULE - DOORS FRAME TYPE | FINISH | JAMB

DETAIL HEAD

PT B2 / A6.11 C2 / A6.11

PT | B2 / A6.11 | C2 / A6.11

PT | B1 / A6.11 | C1 / A6.11

PT | B2 / A6.11 | C2 / A6.11

PT | B2 / A6.11 | C2 / A6.11

PT | B2 / A6.11 | C2 / A6.11

PT B2 / A6.11 C2 / A6.11

PT B2 / A6.11 C2 / A6.11

PT | B2 / A6.11 | C2 / A6.11

PT | B2 / A6.11 | C2 / A6.11

PT | B2 / A6.11 | C2 / A6.11

PT B1 / A6.11 C1 / A6.11

PT D2 / A6.11

D2 DOOR JAMB - EXISTING MASONRY WALL W/ FURRING

 $C_{3"=1'-0"}^{DOOR\ HEAD\ -\ HM\ IN\ METAL\ STUD\ WALL}$

 $B_{\frac{3}{3}=\frac{1}{0}}$

|B2 / A6.11 | C2 / A6.11

FIRE | HW | CARD SILL | RTNG | SET# | READER | OPERATOR | - 12.0 No

- 20.0 No

- 20.0 No

- 20.0 No

- 20.0 No

- 14.0 No

- 16.0 No

- | 16.0 |No

- 20.0 No

- 13.0 No

45 MIN | 9.0 | No

- 20.0 No

- 20.0 No

- 20.0 No

- 23.0 No

- 20.0 No

- 20.0 No

- 20.0 No

- 17.0 No

- 20.0 No

45 MIN 8.0 No

45 MIN | 8.0 | No

- SCHEDULED

HOLLOW METAL FRAME ANCHOR

DOUBLE RABBET HM DOOR FRAME.

FILL SOLID W/ GROUT. 3 ANCHORS

ELASTOMERIC SEALANT

MTL. STUD

SEALANT ALL

AROUND FRAME

WOOD BLOCKING

DOUBLE RABBET HM

DOOR FRAME

SPRAY-APPLIED

POLYURETHANE

ATTENUATION

WHERE REQUIRED

FOAM INSULATION

AS REQ'D

HEADER

DOOR

- 20.0 No

- 20.0 No No

- 24.0

- 15.0 **Yes** No

22.0 Yes

25.0 No

11.0 No No

No

No

EXIT DEVICE

EXIT DEVICE

COMMENTS

60 14th Street South 205.251.0125

BAKERS ROW, Suite 100 Birmingham, AL 35233 www.kpsgroup.com

This drawing is an Instrument of Service for this

Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

The Architect shall not have control or charge of,

and precautions in connection with the Work, for

any of the Work in accordance with the Contract

3531

By DONALD C.

RENOVATION

AND

ADDITI

SIMPSON


written consent of the Architect is prohibited.

and shall not be responsible for construction


Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs

the acts or omissions of the Contractor, Subcontractors or any other persons performing




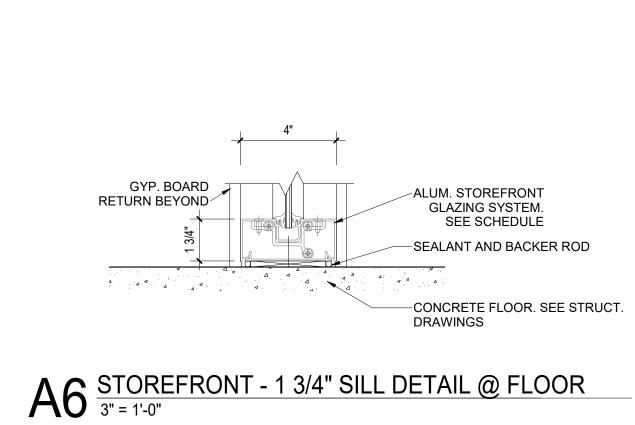


 $B6 \frac{\text{STOREFRONT - DOOR JAMB TO MULLION}}{3" = 1'-0"}$

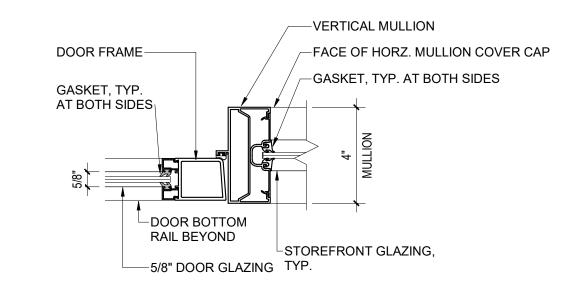


 $C6^{\frac{\text{STOREFRONT} - 1 3/4" JAMB DETAIL}{3" = 1'-0"}}$

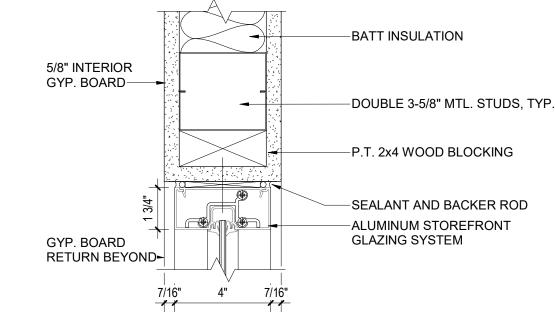


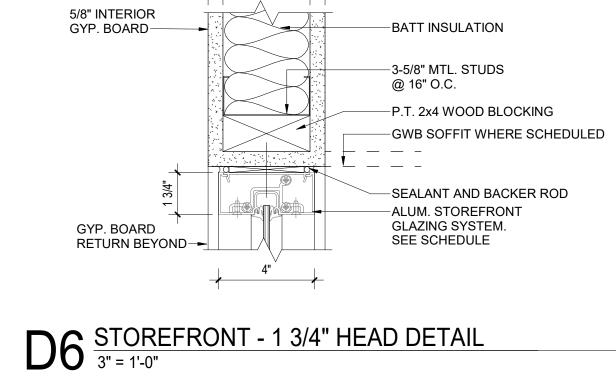

E6 STOREFRONT - 1 3/4" HEAD DETAIL, DOOR $\frac{1}{3}$ " = 1'-0"

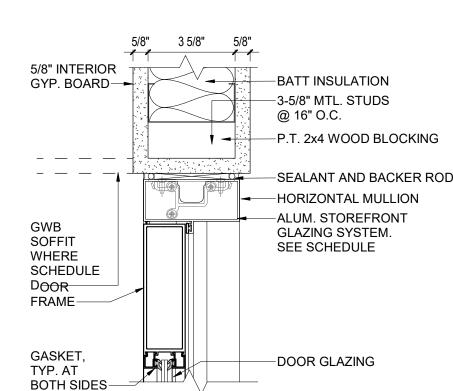

4 1/2"

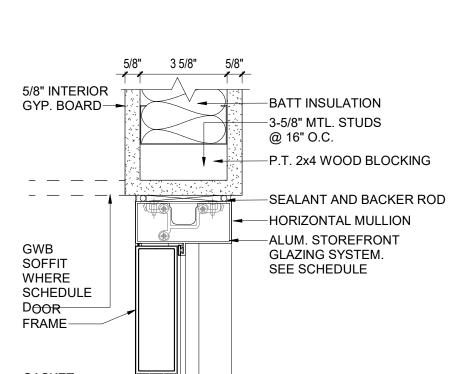


F6 STOREFRONT - 1 3/4" CORNER MULLION
3" = 1'-0"


SCHEDULED GLASS

-ALUMINUM


STOREFRONT

CORNER MULLION

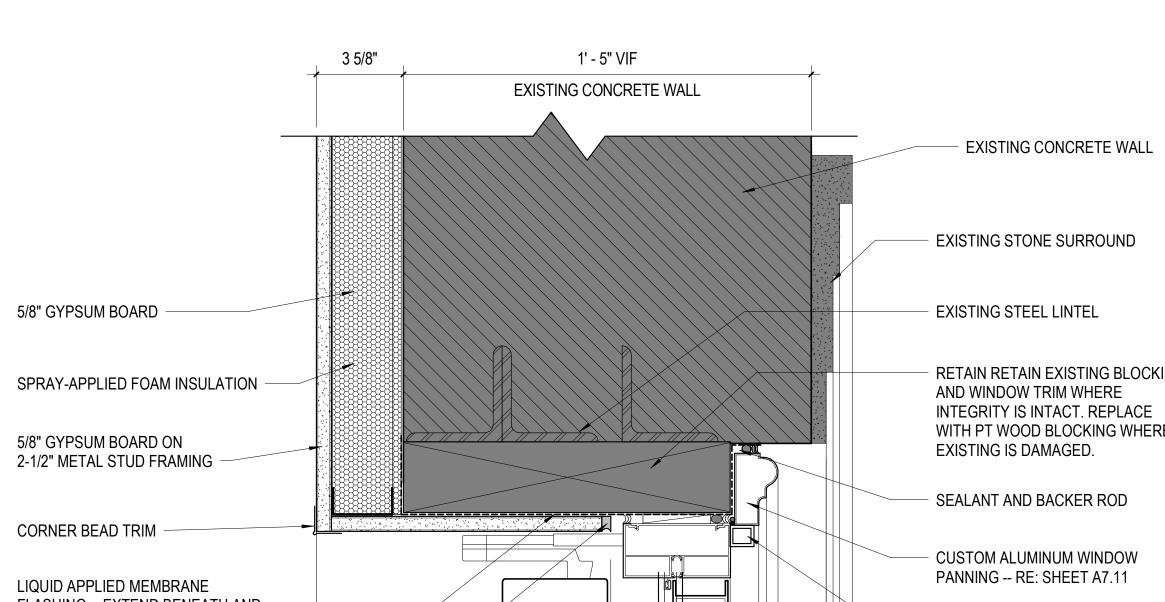


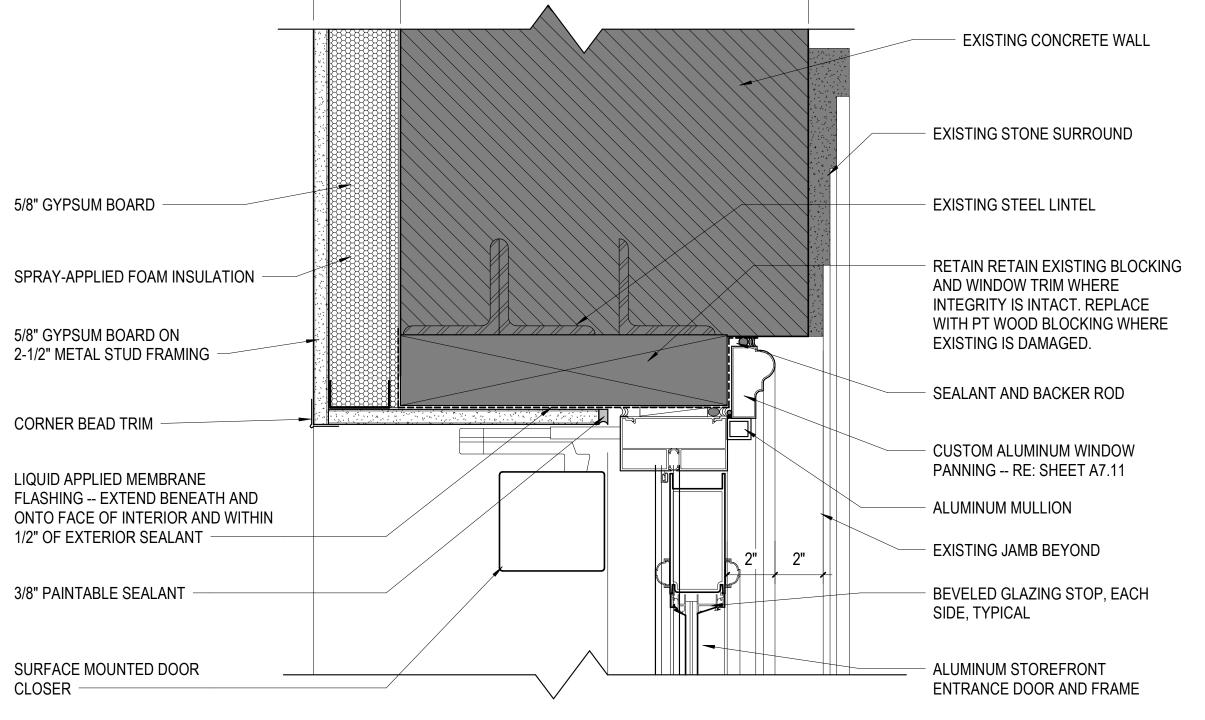

 $D3 \frac{\text{DETAIL - EXTERIOR DOOR HEAD}}{3" = 1'-0"}$ RETAIN RETAIN EXISTING BLOCKING AND WINDOW TRIM WHERE INTEGRITY IS INTACT. REPLACE WITH PT WOOD CORNER BEAD TRIM, TYP BLOCKING WHERE EXISTING IS DAMAGED. 5/8" GYPSUM BOARD ON 2-1/2" METAL STUD FRAMING -SPRAY-APPLIED FOAM INSULATION 5/8" GYPSUM BOARD ON 6" COLD FORMED METAL STUD FRAMING W/ CAVITY INSULATION

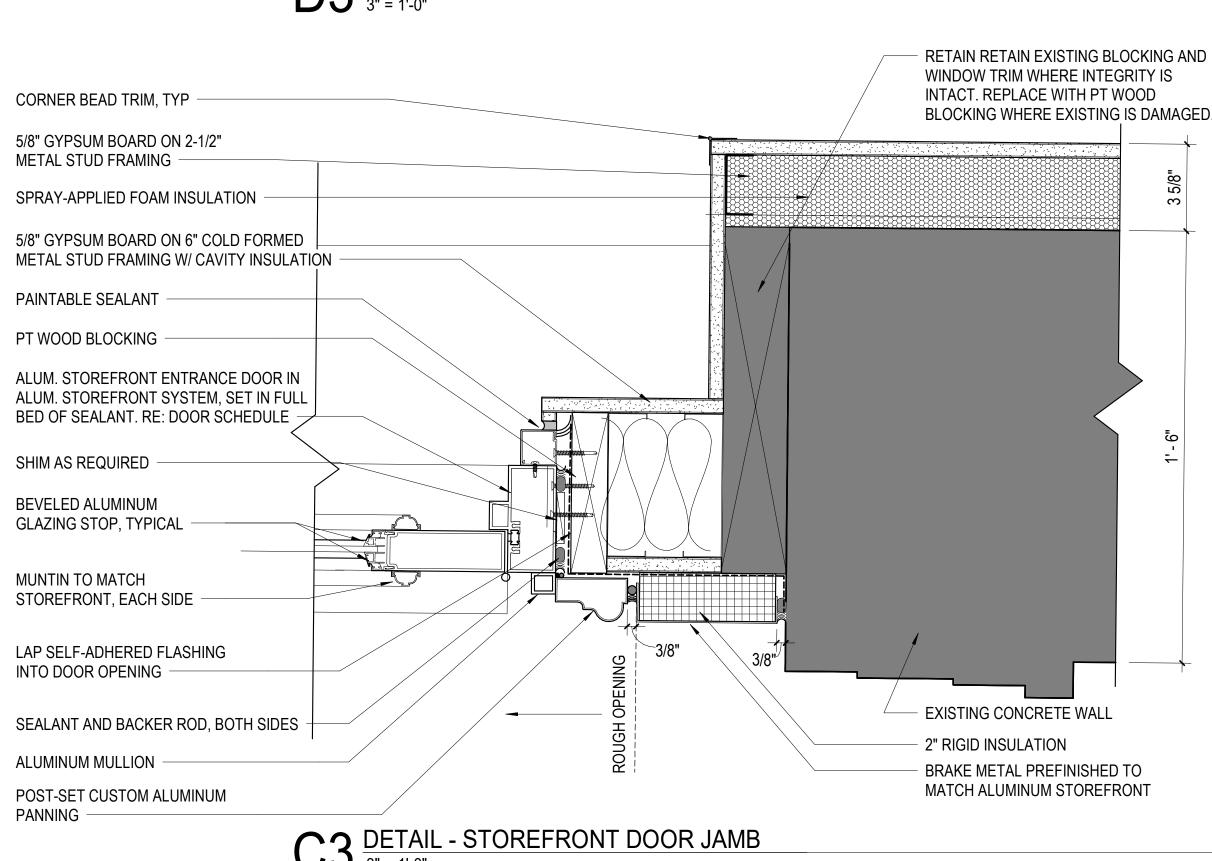

C3 DETAIL - STOREFRONT DOOR JAMB
3" = 1'-0" BEVELED ALUMINUM GLAZING STOP, EACH SIDE APPLIED ALUMINUM MUNTIN TO

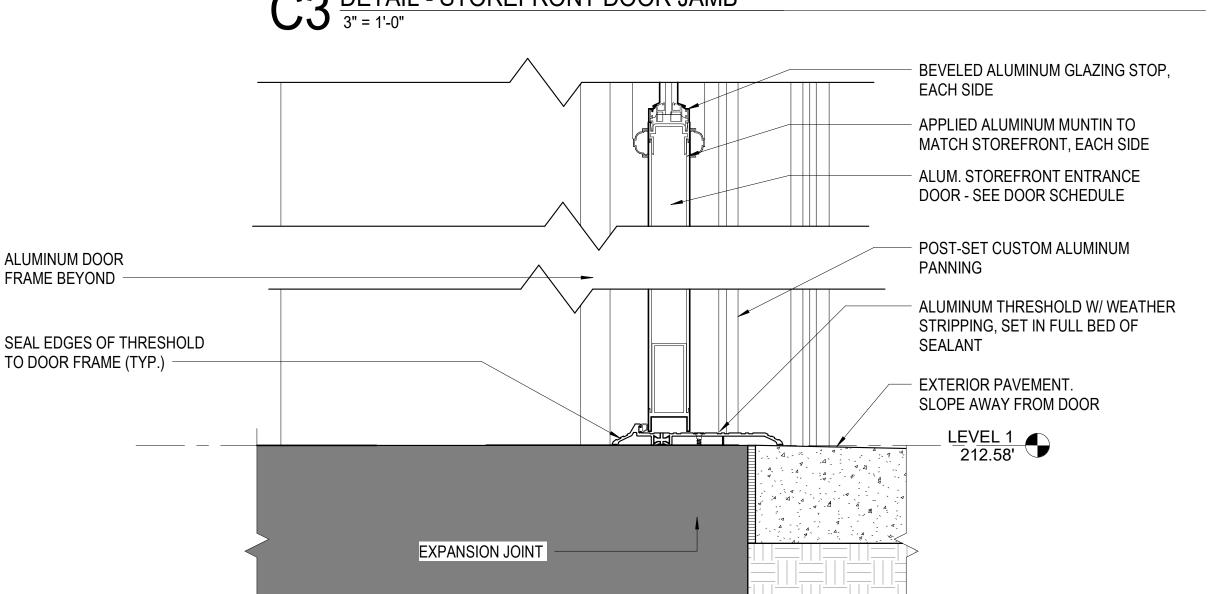

SCHEDULED CEILING

SPRAY-APPLIED FOAM

5/8" GYPSUM BOARD ON

2-1/2" METAL STUD

CORNER BEAD TRIM

LIQUID APPLIED MEMBRANE

1/2" OF EXTERIOR SEALANT

3/8" PAINTABLE SEALANT

SURFACE MOUNTED DOOR

CLOSER -

JAMB BEYOND

FLASHING -- EXTEND BENEATH AND

ONTO FACE OF INTERIOR AND WITHIN

T-03-LS

4" CMU -

BARRIER -

INSULATION

INTO OPENING

CONTINUOUS RIGID

STUCCO DIRECT APPLIED TO 4"

SELF ADHERED FLASHING LAPPED

ROUGH OPENING

INSULATION -

FRAMING

PAINTABLE SEALANT 1X1 24 GA SS ANGLE HOLLOW METAL DOOR FRAME ANCHOR SEALANT AND BACKER ROD HOLLOW METAL DOOR FRAME 1' - 0" SCHEDULED DOOR P1 DETAIL - HM DOOR JAMB AT NEW ADDITION 3" = 1'-0" ADA-COMPLIANT ALUMINUM THRESHOLD -SCHEDULED DOOR IN FULL BED OF SEALANT-SEALANT-HM DOOR FRAME BEYOND EXTERIOR CONCRETE -SEAL EDGES OF SIDEWALK-THRESHOLD TO DOOR FRAME (TYP.) EXPANSION JOINT $A_{3''=1'-0''}$

TERMINATION BAR AND CAULK TRAY - ANCHOR @ 8" O.C. -CONTINUOUS GYPSUM AIR BARRIER CAVITY DRAINAGE MATERIAL SELF-ADHERING FLASHING LAPPED OVER THRU-WALL FLASHING 5/8" GYPSUM WALL BOARD WITH SCHEDULED FINISH STUCCO DIRECT APPLIED TO COLD-FORMED METAL FRAMING CONCRETE LINTEL - SEE STRUCTURAL CONTINUOUS RIGID INSULATION THRU-WALL FLASHING, EXTEND 12" SPRAY FOAM INSULATION BEYOND JAMBS, EACH SIDE. LAP OVER STAINLESS STEEL DRIP EDGE AND HOLD 3/4" FROM EDGE CORNER BEAD TRIM ROUGH OPENING PAINTABLE SEALANT WEEP SCREED SS FLASHING DRIP EDGE SEALANT AND BACKER ROD, **BOTH SIDES** SEALANT AND BACKER ROD SELF ADHERED FLASHING SHIM AS REQUIRED LAPPED INTO OPENING HOLLOW METAL DOOR FRAME SCHEDULED DOOR D1 $\frac{\text{DETAIL} - \text{HM DOOR HEAD AT ADDITION}}{3" = 1'-0"}$ CONTINUOUS GYPSUM BOARD AIR

2 5/8" 2"

E1 $\frac{\text{DETAIL - ENTRY DOOR TRANSOM}}{3" = 1'-0"}$

+ +

1

INSULATION

5/8" GYPSUM BOARD ON

METAL STUD FRAMING

CORNER BEAD TRIM

EXISTING BRICK MASONRY WALL

AND WINDOW TRIM WHERE

EXISTING IS DAMAGED.

TRIM. PAINT.

INTEGRITY IS INTACT. REPLACE

SEALANT AND BACKER ROD

EXISTING STONE JAMB BEYOND

- BEVELED GLAZING STOP, EACH

ALUMINUM MULLION

SIDE, TYPICAL

- ALUMINUM MULLION

ALUMINUM STOREFRONT

ENTRANCE DOOR AND FRAME

- APPLIED ALUMINUM MUNTIN OT

BEVELED GLAZING STOP, EACH

SIDE, TYPICAL

MATCH STOREFRONT, EACH SIDE

WITH PT WOOD BLOCKING WHERE

WOOD TRIM TO MATCH WINDOW TYPE 09

REMOVE, STRIP, AND REFINISH. INSTALL

WATERPROOFING BEHIND & REINSTALL

RETAIN RETAIN EXISTING BLOCKING

 \Box

BAKERS ROW, Suite 100

60 14th Street South

Birmingham, AL 35233

205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this

Project and is the sole and exclusive property of

the Architect. Any use without the knowledge and

The Architect shall not have control or charge of,

sequences, or procedures, or for safety programs and precautions in connection with the Work, for

Subcontractors or any other persons performing

any of the Work in accordance with the Contract

3531

By DONALD C. SIMPSON

written consent of the Architect is prohibited.

and shall not be responsible for construction

Means and Methods, deviations, techniques,

the acts or omissions of the Contractor,

Documents.

Z

PROJECT STATUS BID SET SSUED SET: SSUE DATE: 30 JAN 24 EVISIONS No. Description

DOOR AND FRAME DETAILS


Checker HECKED BY: ROJECT NUMBER 236002-02

A3 DETAIL - EXTERIOR DOOR SILL 3" = 1'-0"

ALUMINUM DOOR

FRAME BEYOND

TO DOOR FRAME (TYP.)

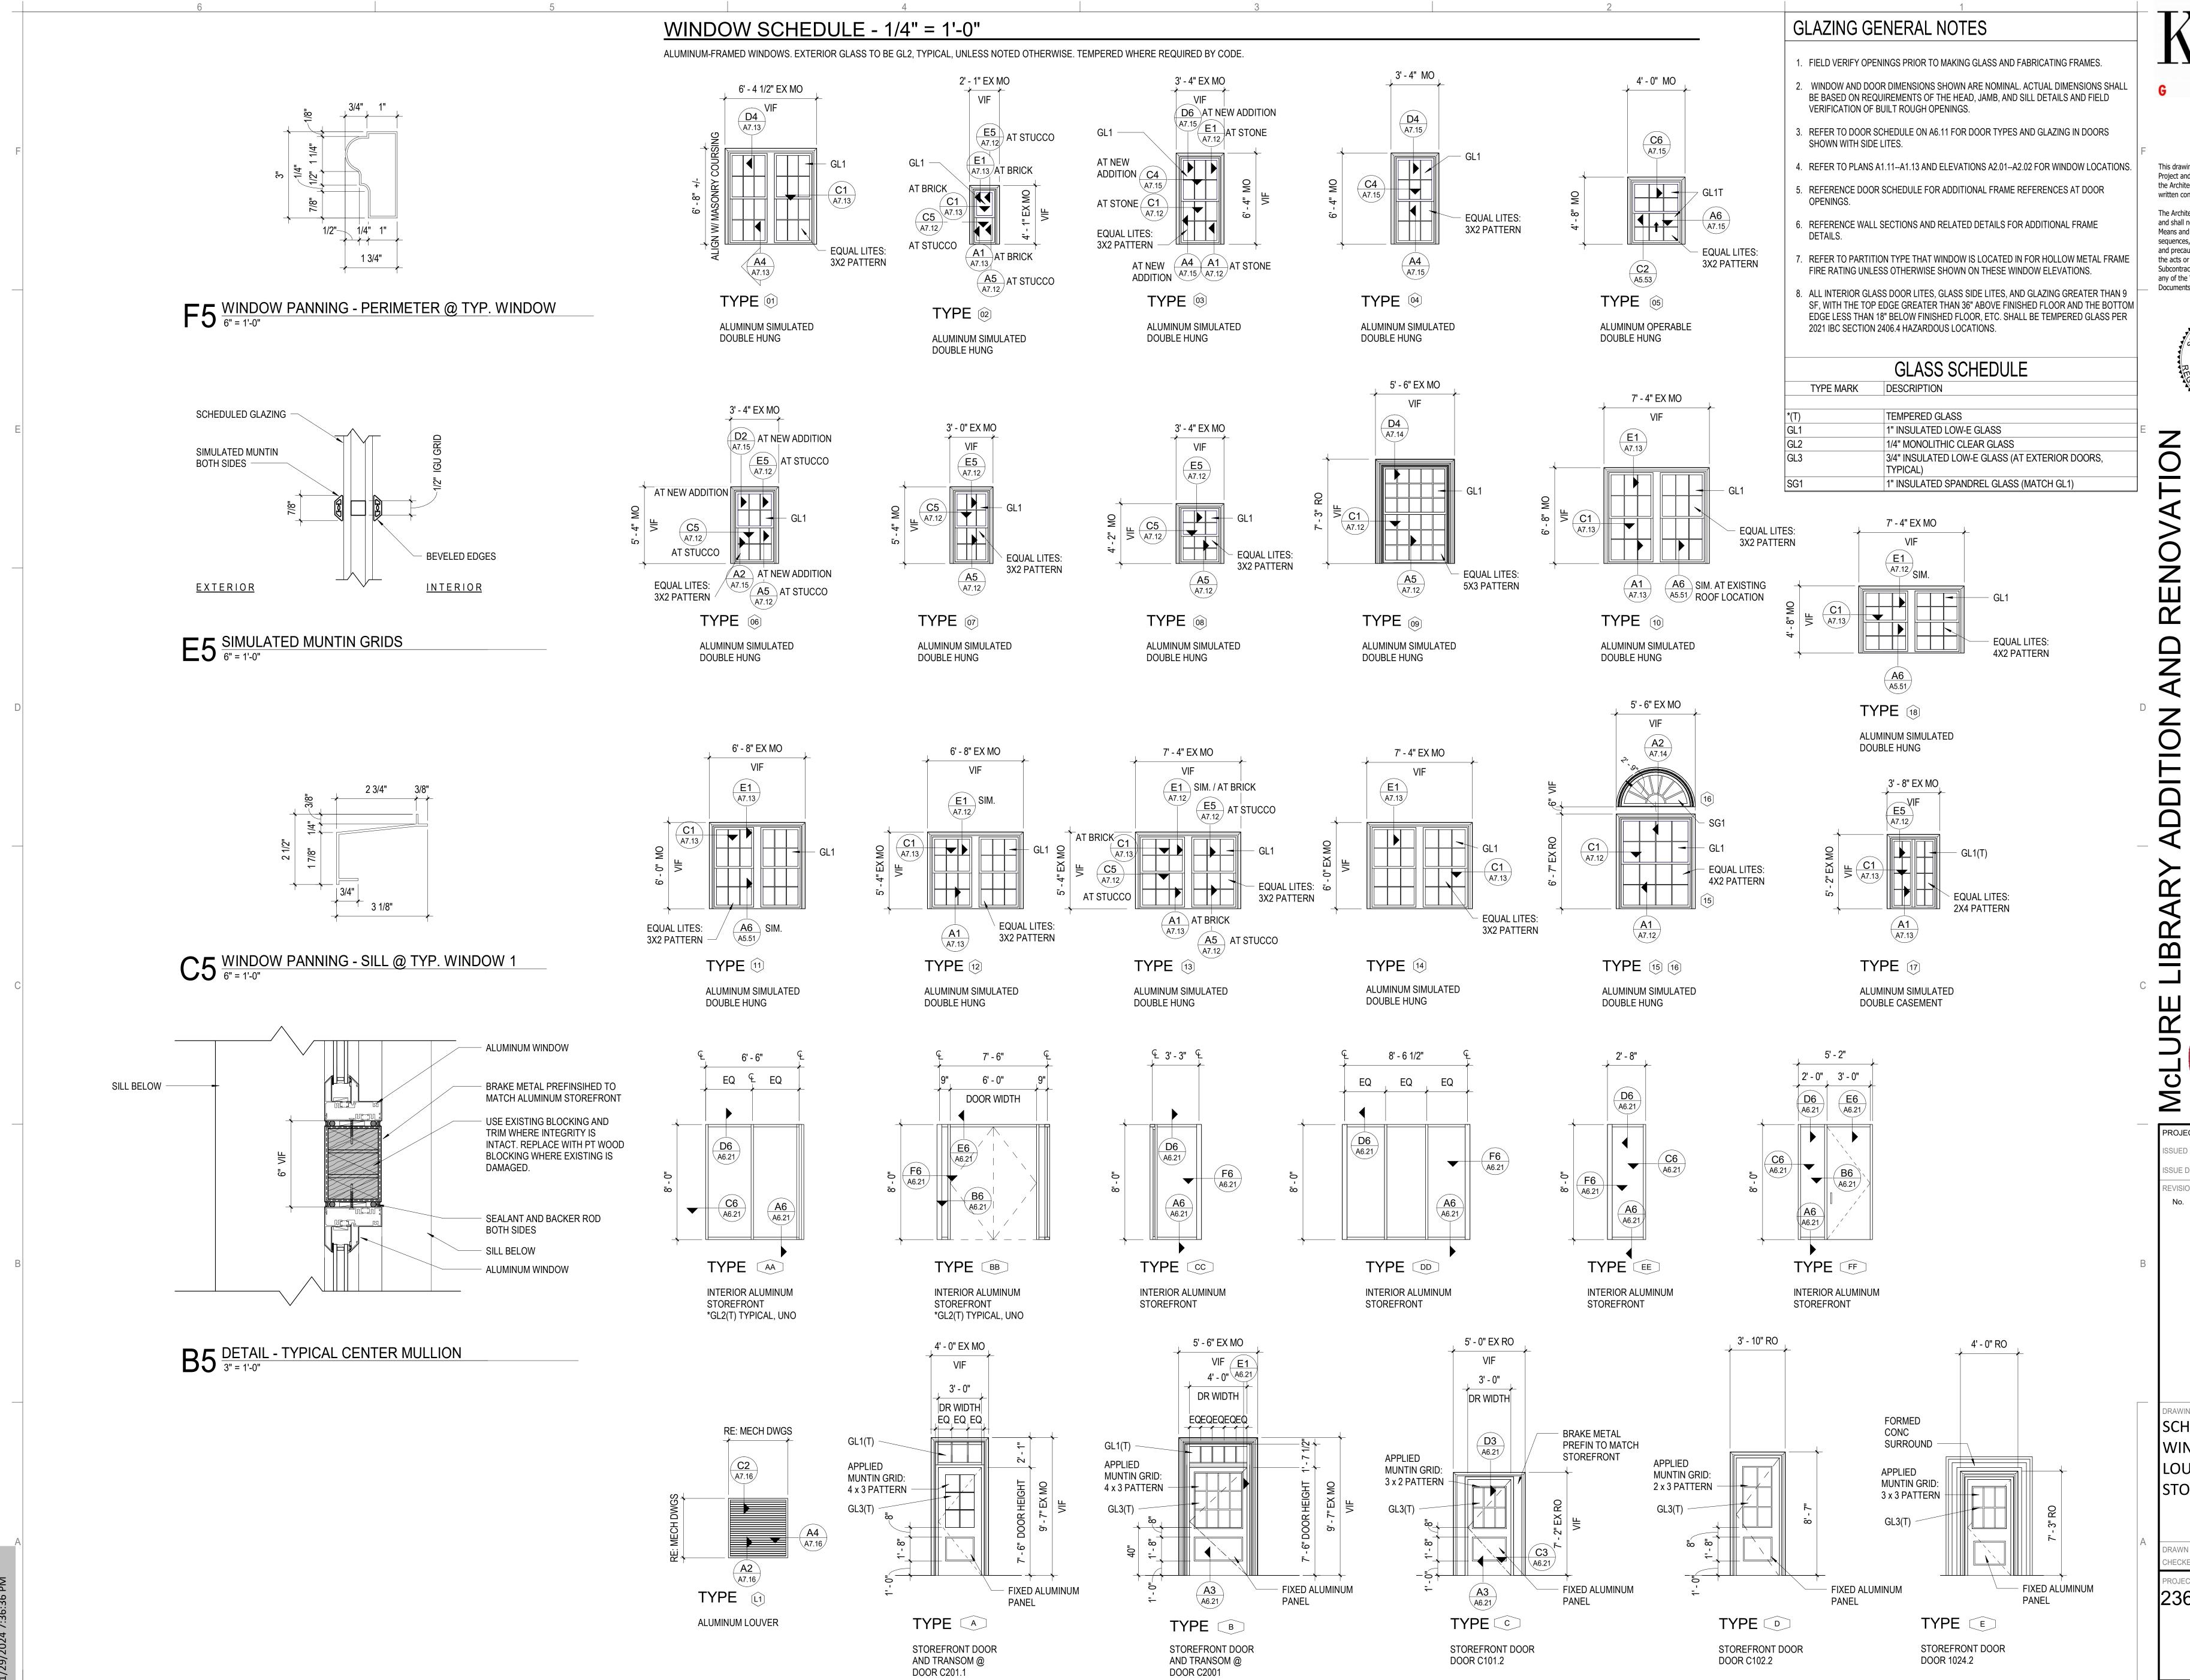



BAKERS ROW, Suite 100 60 14th Street South

Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract






PROJECT STATUS BID SET SSUED SET: SSUE DATE: 30 JAN 24 REVISIONS No. Description RAWING TITLE SCHEDULE -WINDOWS / LOUVERS /

STOREFRONT


HECKED BY: ROJECT NUMBER

236002-02


A5 DETAIL - SILL AT EXISTING STUCCO $\frac{3}{3} = 1.0$

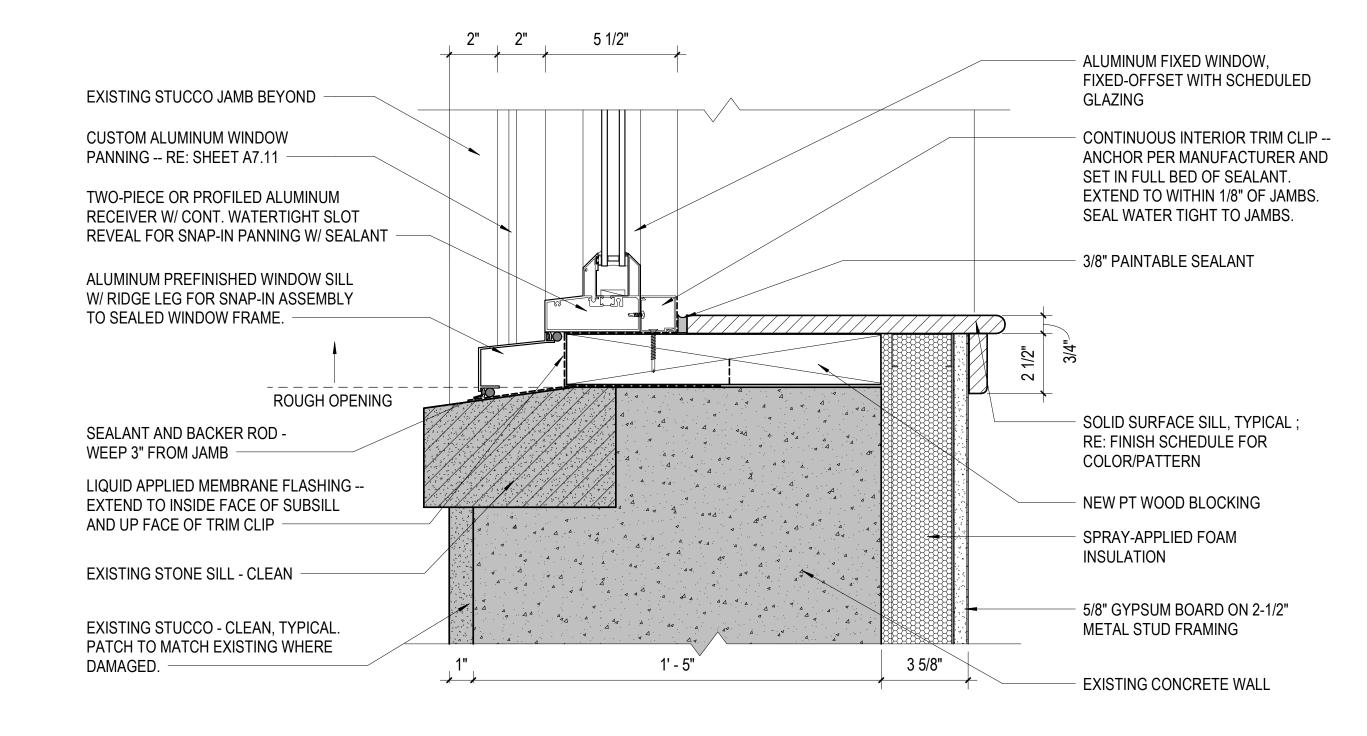


C5 DETAIL - JAMB AT EXISTING STUCCO

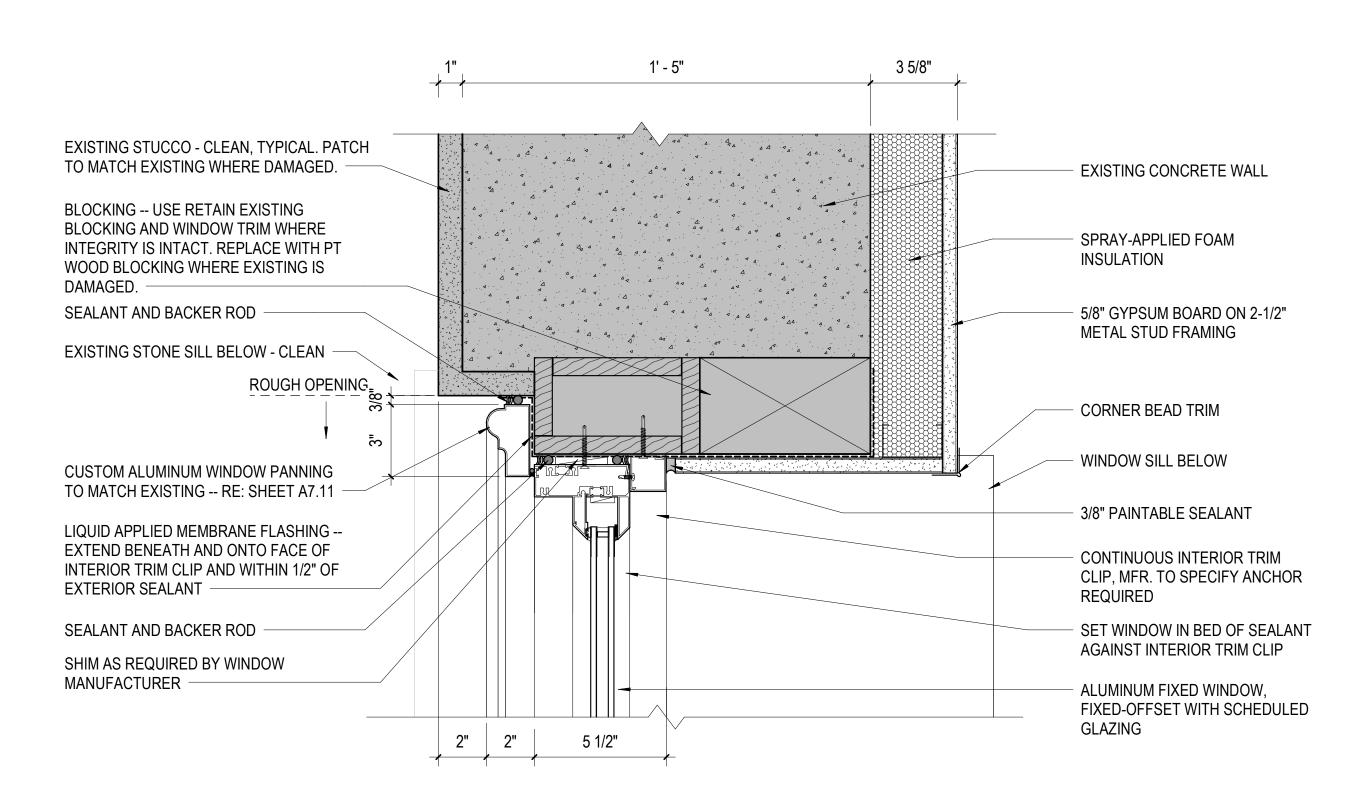

E5 DETAIL - HEAD AT EXISTING STUCCO

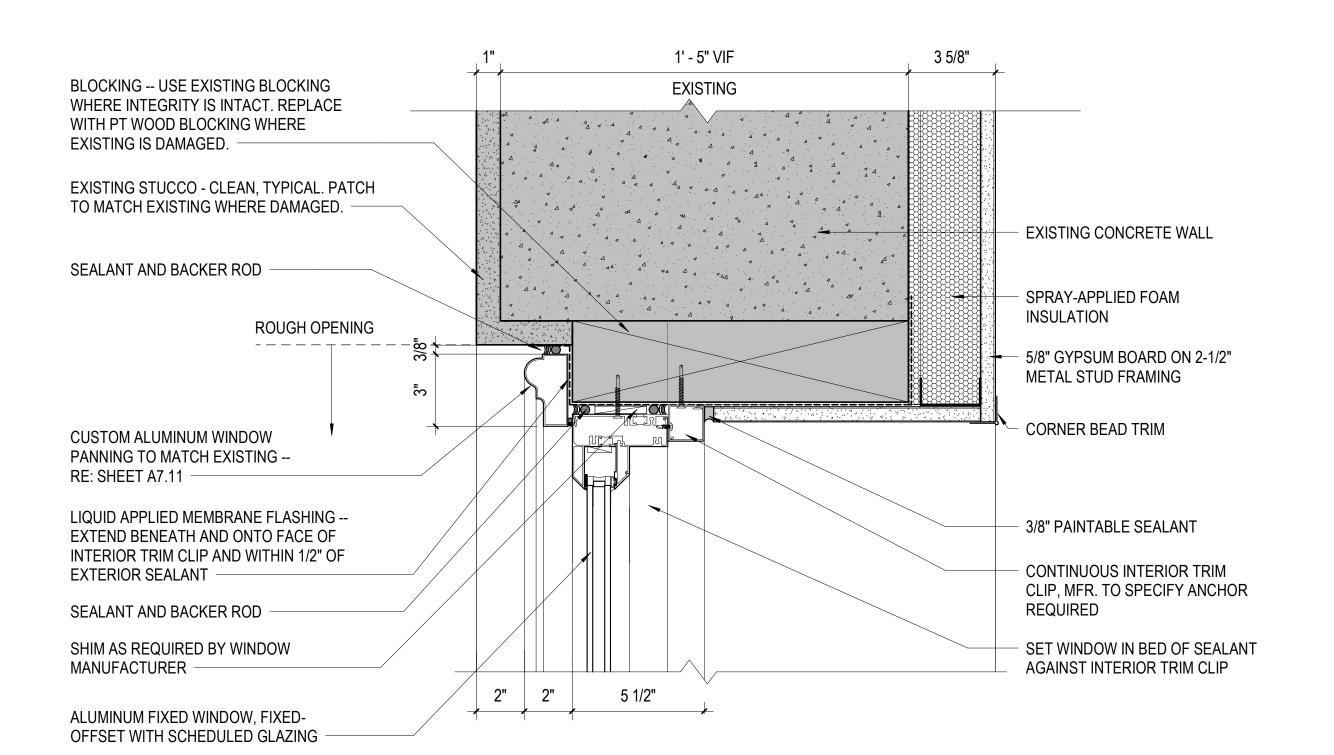

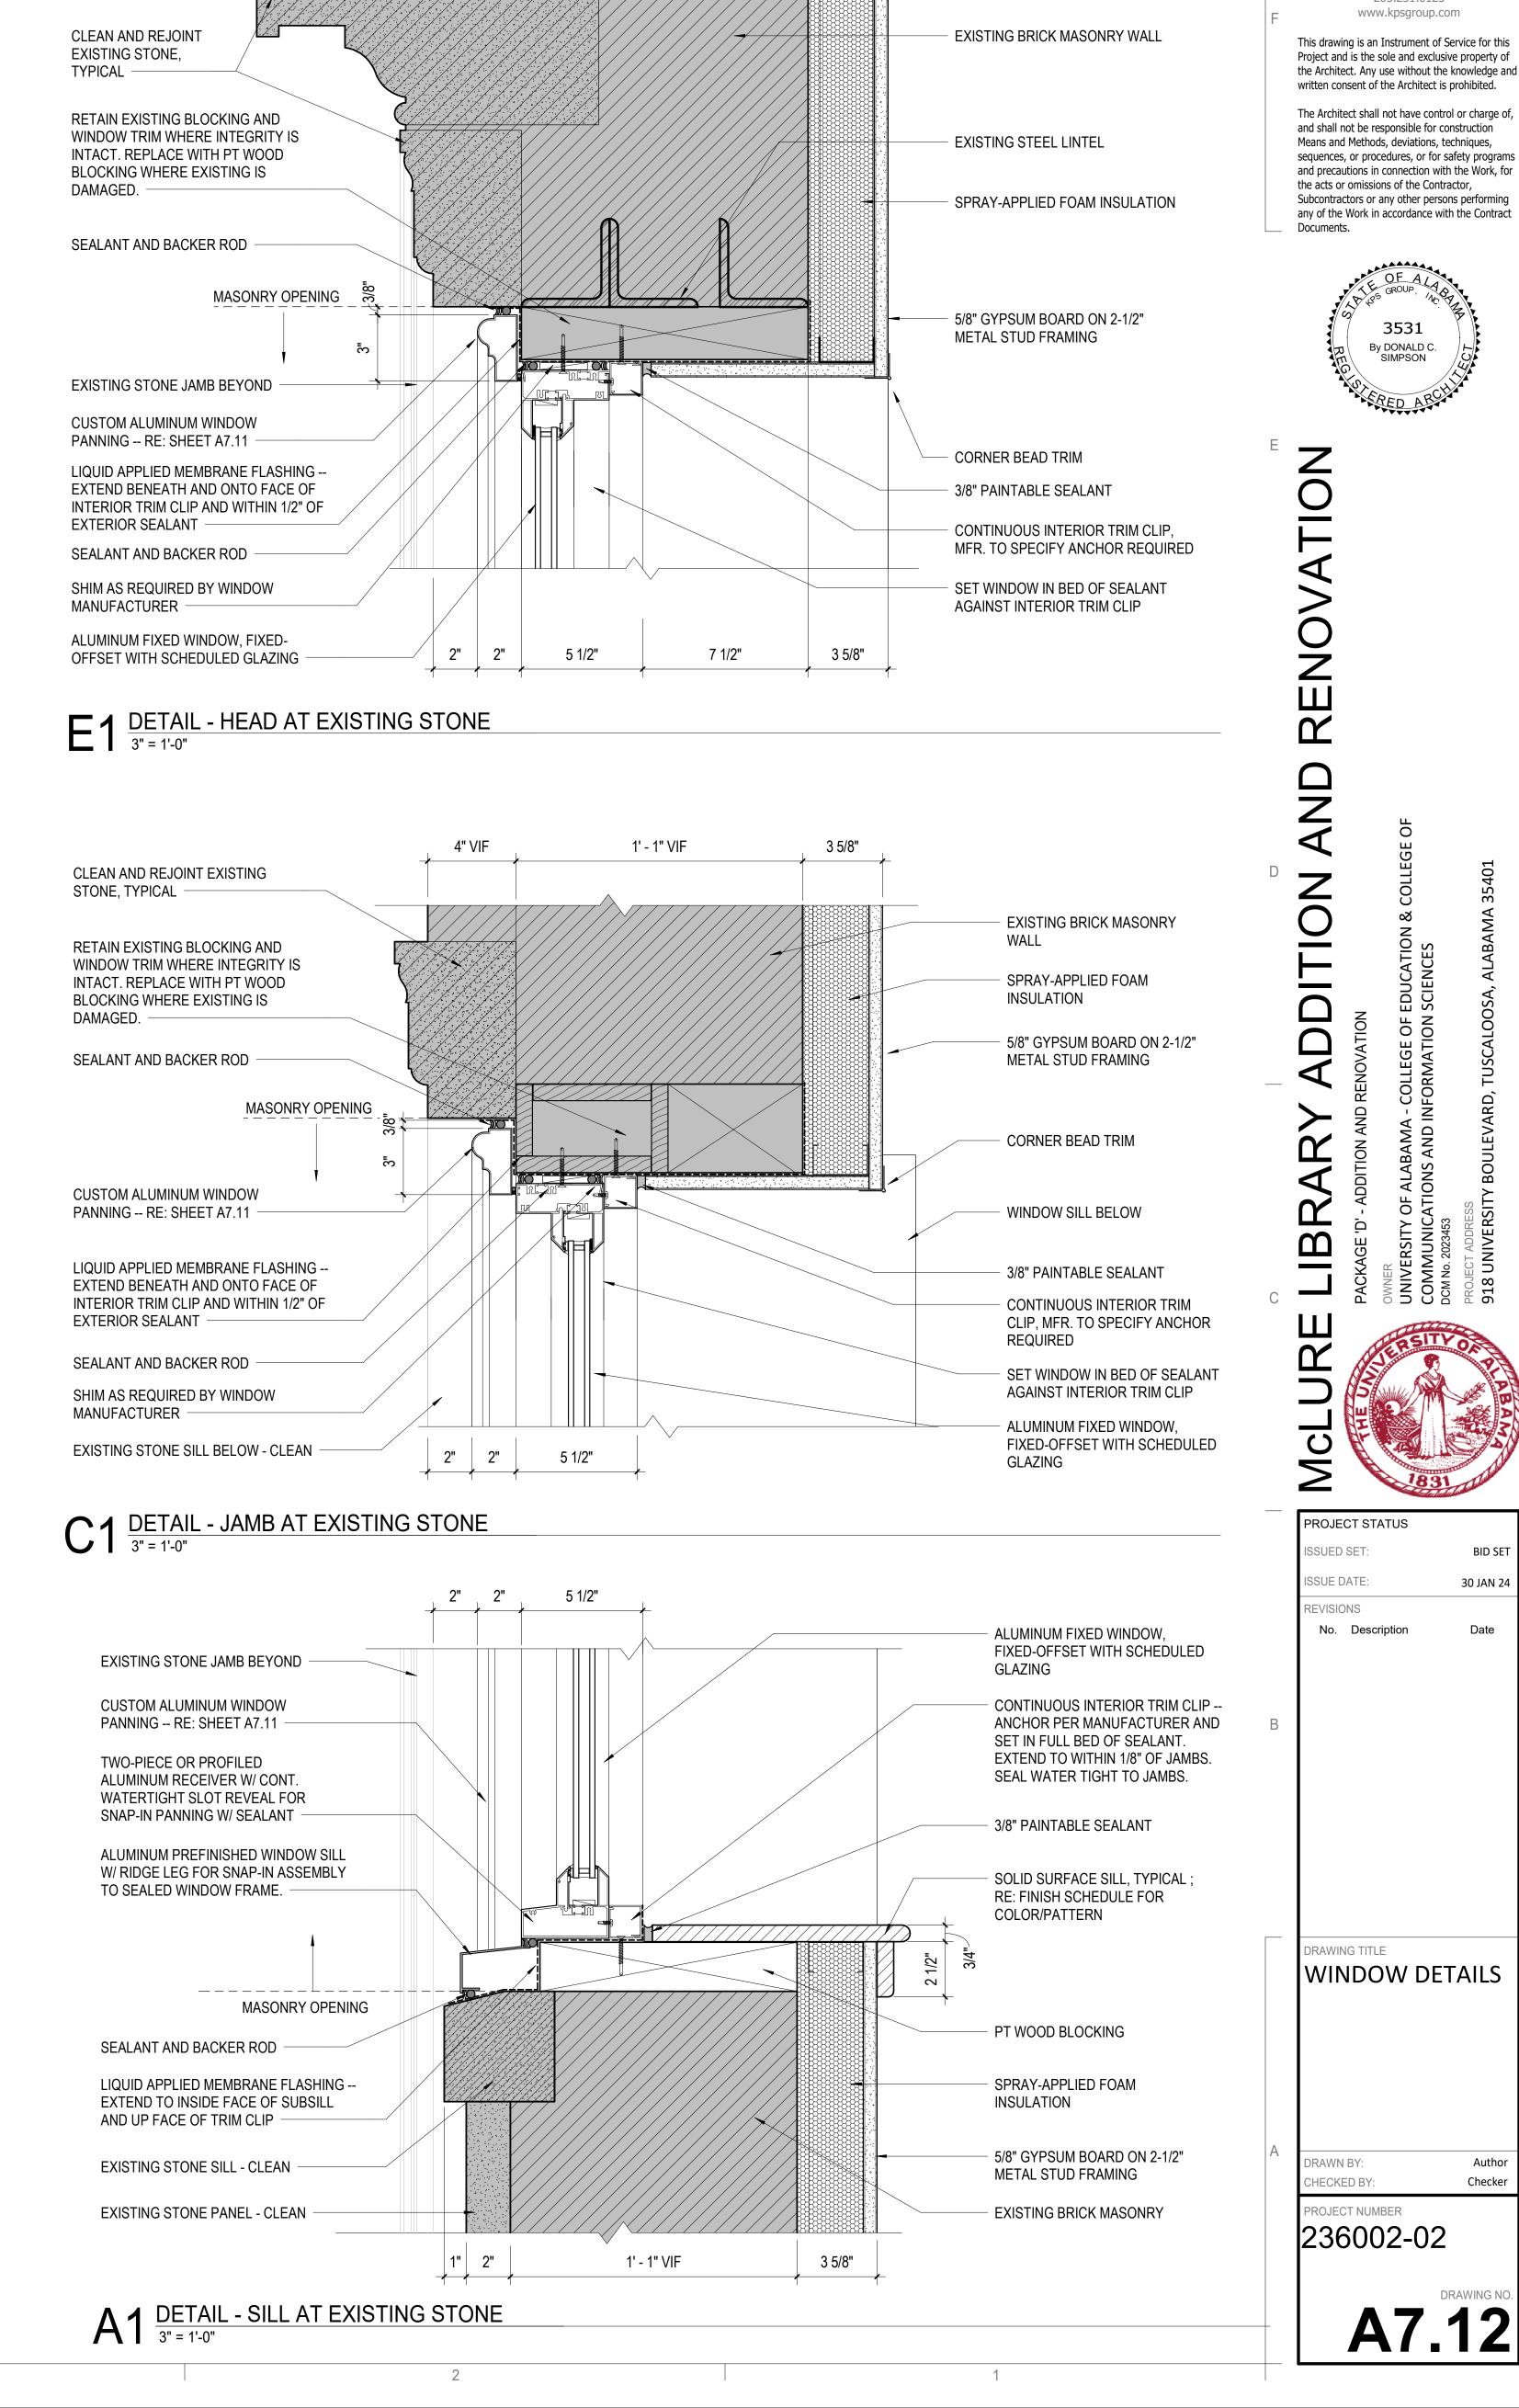

BAKERS ROW, Suite 100

60 14th Street South Birmingham, AL 35233


205.251.0125


3531


BID SET

30 JAN 24


ALUMINUM FIXED WINDOW, FIXED-

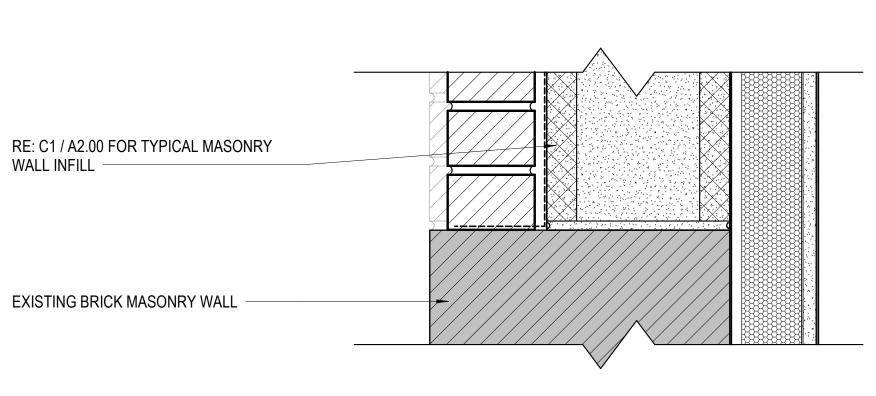

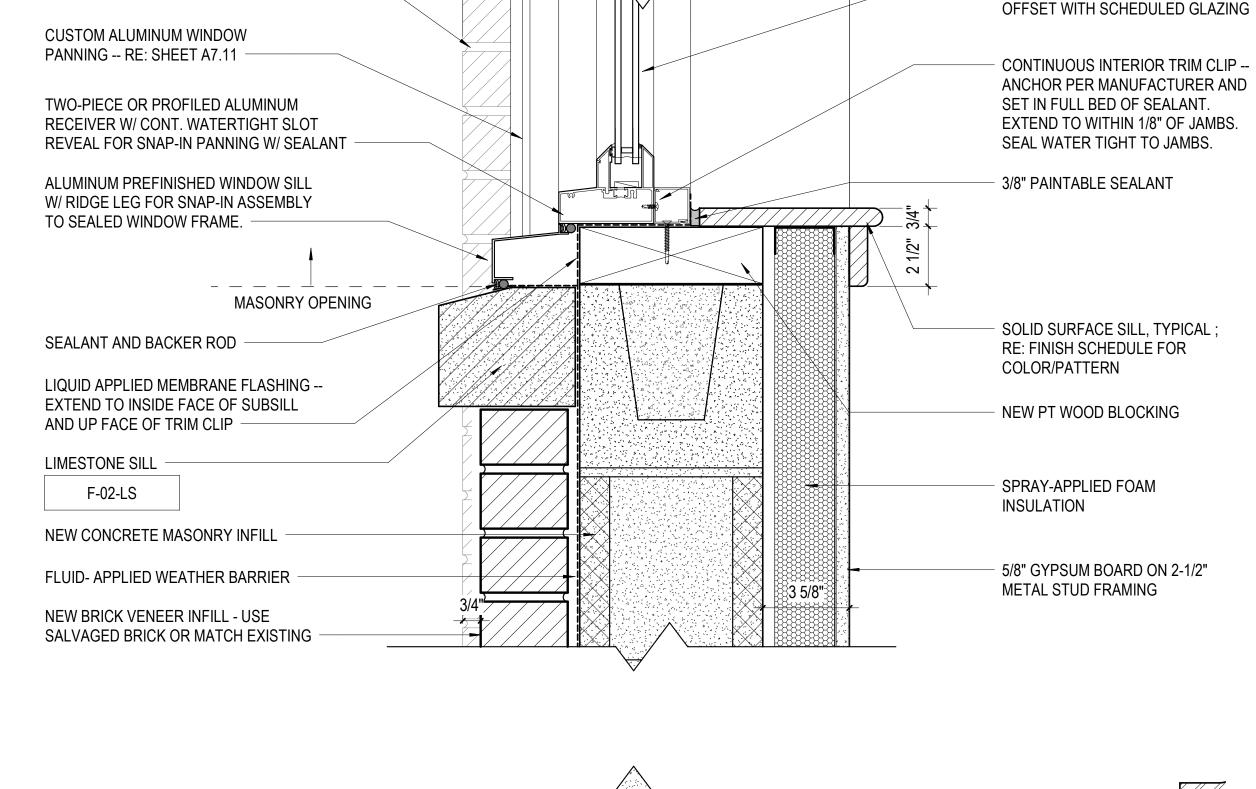

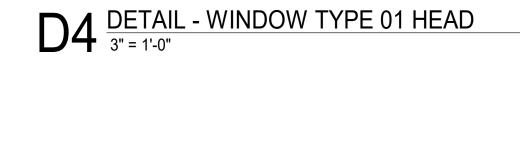


EXISTING BRICK WINDOW JAMB

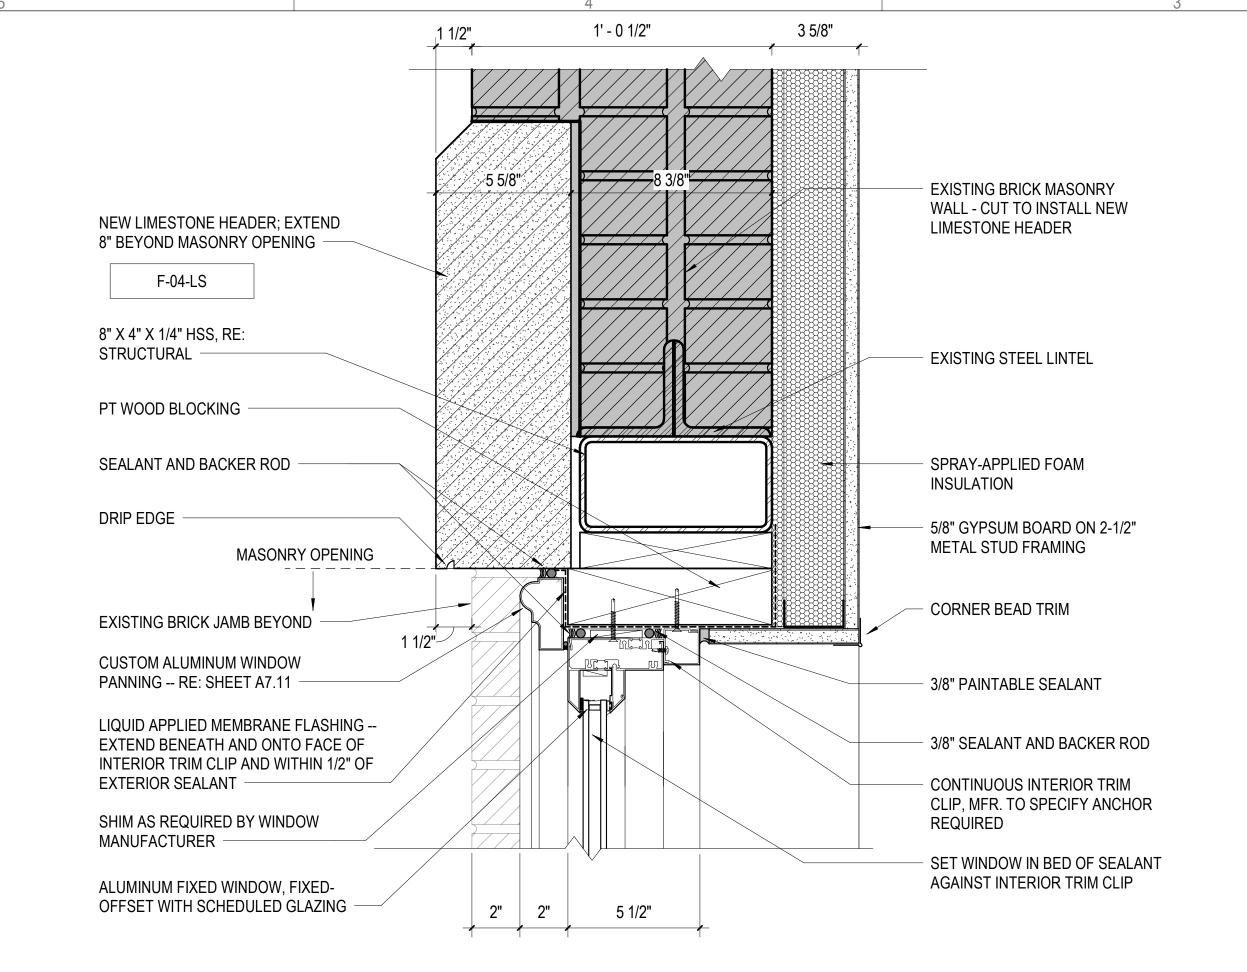


ALUMINUM FIXED WINDOW, FIXED-OFFSET WITH SCHEDULED GLAZING **EXISTING BRICK WINDOW JAMB** CONTINUOUS INTERIOR TRIM CLIP -- ANCHOR PER CUSTOM ALUMINUM WINDOW MANUFACTURER AND SET IN PANNING -- RE: SHEET A7.11 -FULL BED OF SEALANT. EXTEND TO WITHIN 1/8" OF JAMBS. SEAL WATER TIGHT TO JAMBS. TWO-PIECE OR PROFILED ALUMINUM RECEIVER W/ CONT. WATERTIGHT SLOT 3/8" PAINTABLE SEALANT REVEAL FOR SNAP-IN PANNING W/ SEALANT SOLID SURFACE SILL, TYPICAL; RE: FINISH SCHEDULE FOR ALUMINUM PREFINISHED WINDOW SILL COLOR/PATTERN W/ RIDGE LEG FOR SNAP-IN ASSEMBLY TO SEALED WINDOW FRAME. MASONRY OPENING NEW PT WOOD BLOCKING SEALANT AND BACKER ROD -LIQUID APPLIED MEMBRANE FLASHING --- SPRAY-APPLIED FOAM EXTEND TO INSIDE FACE OF SUBSILL INSULATION AND UP FACE OF TRIM CLIP -EXISTING STONE SILL - CLEAN 5/8" GYPSUM BOARD ON 2-1/2" EXISTING BRICK MASONRY WALL METAL STUD FRAMING 3 5/8"

C1 DETAIL - WINDOW JAMB AT EXISTING BRICK WALL 3'' = 1'-0''

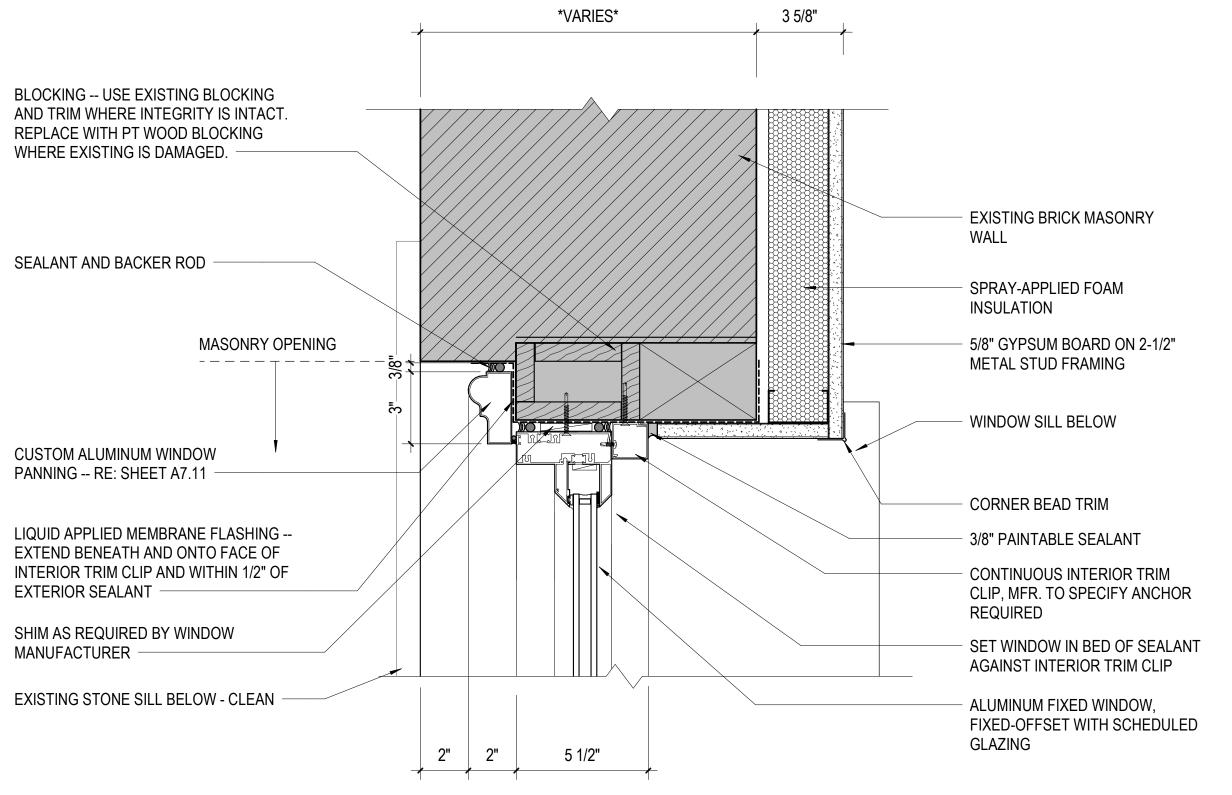

$\mathbf{E1}$ DETAIL - WINDOW HEAD AT EXISTING BRICK WALL 3" = 1'-0"

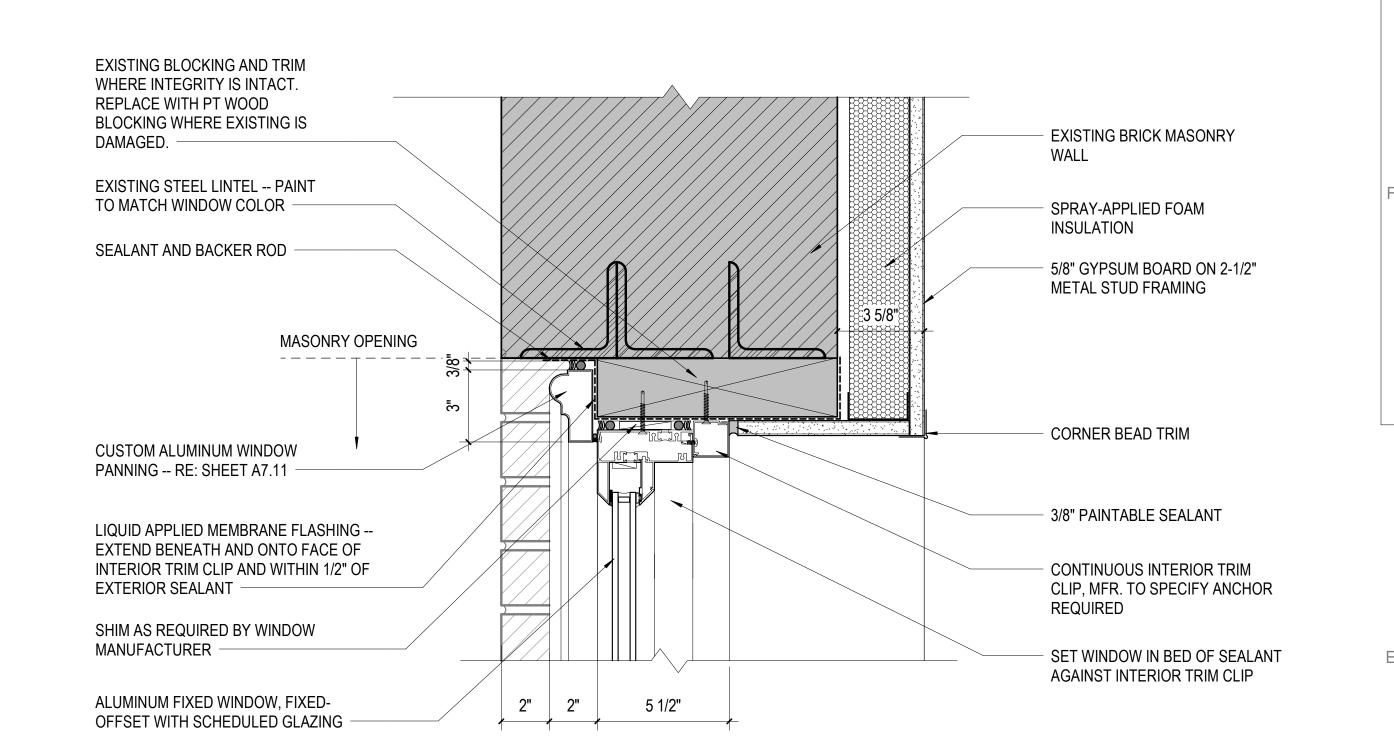

RENO AND \Box

PROJECT STATUS

No. Description

RAWING TITLE

HECKED BY:

ROJECT NUMBER

236002-02

WINDOW DETAILS


BID SET

30 JAN 24

SSUED SET:

SSUE DATE:

REVISIONS

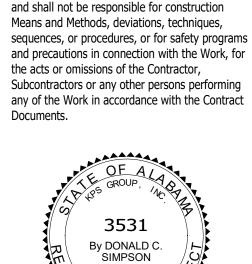



205.251.0125 www.kpsgroup.com This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of,

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233



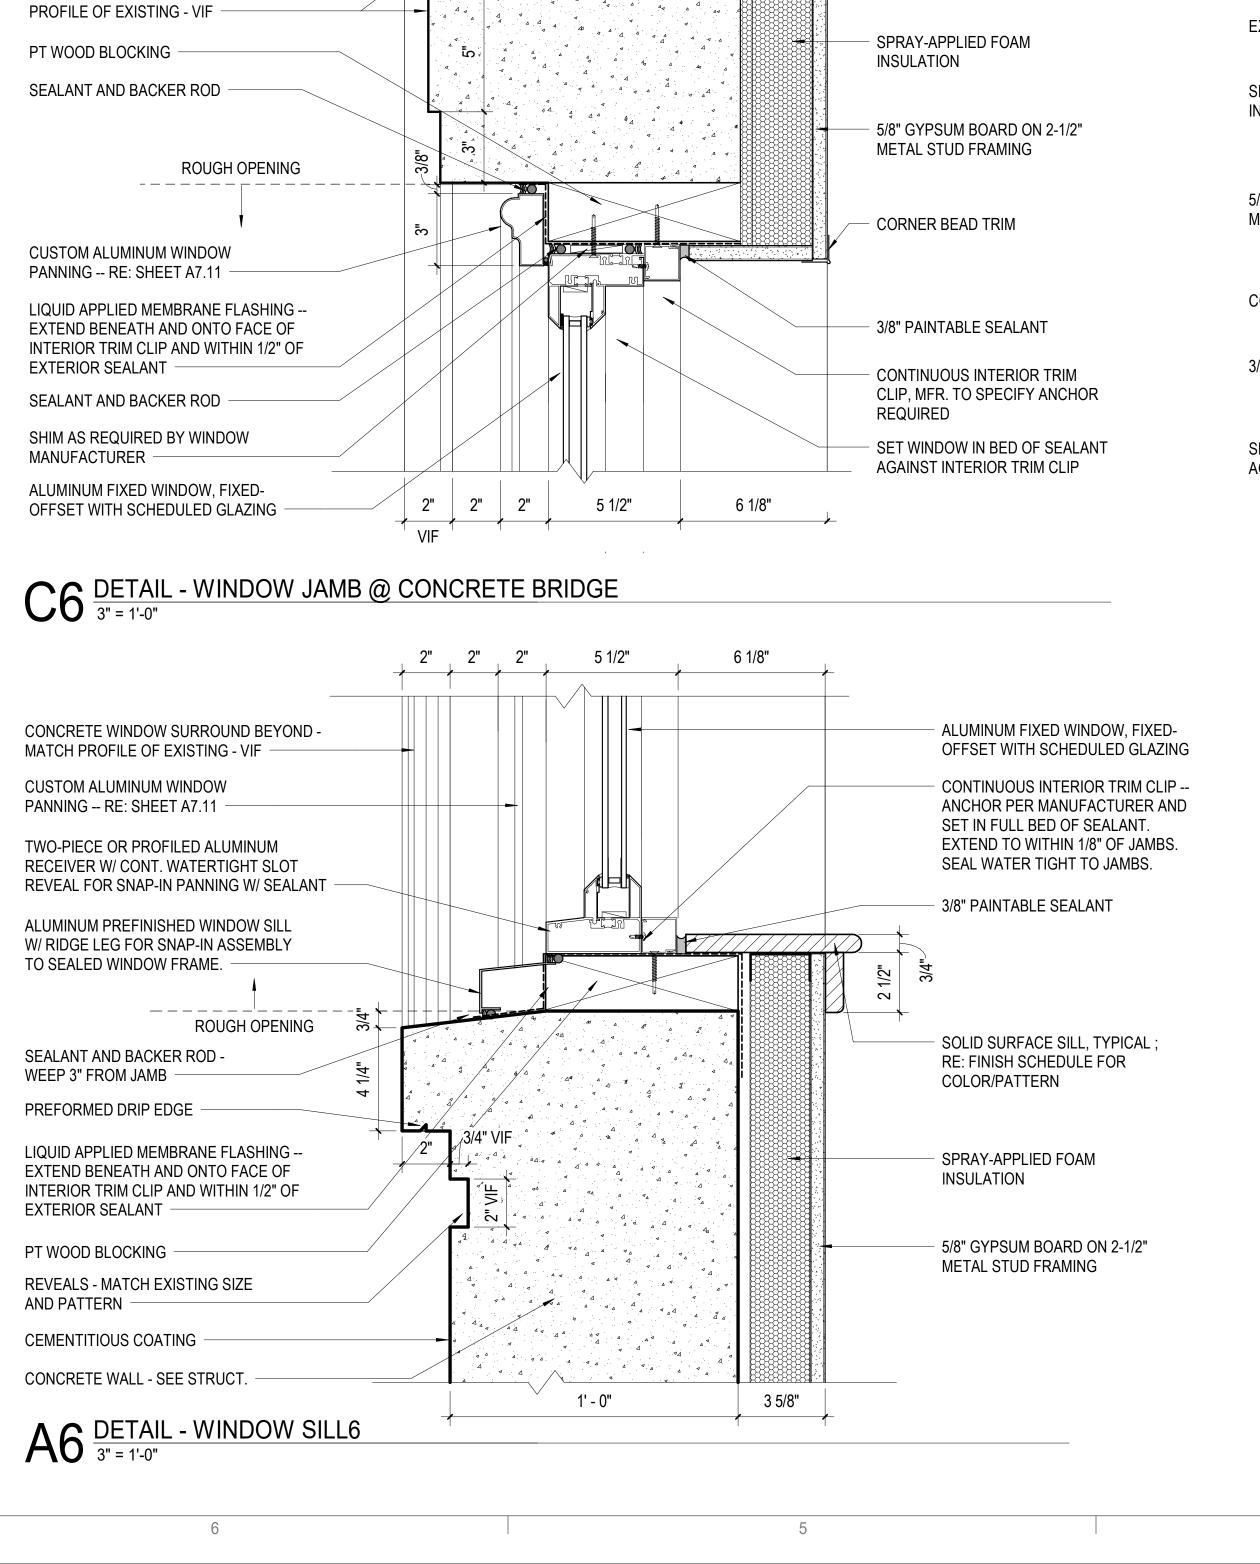

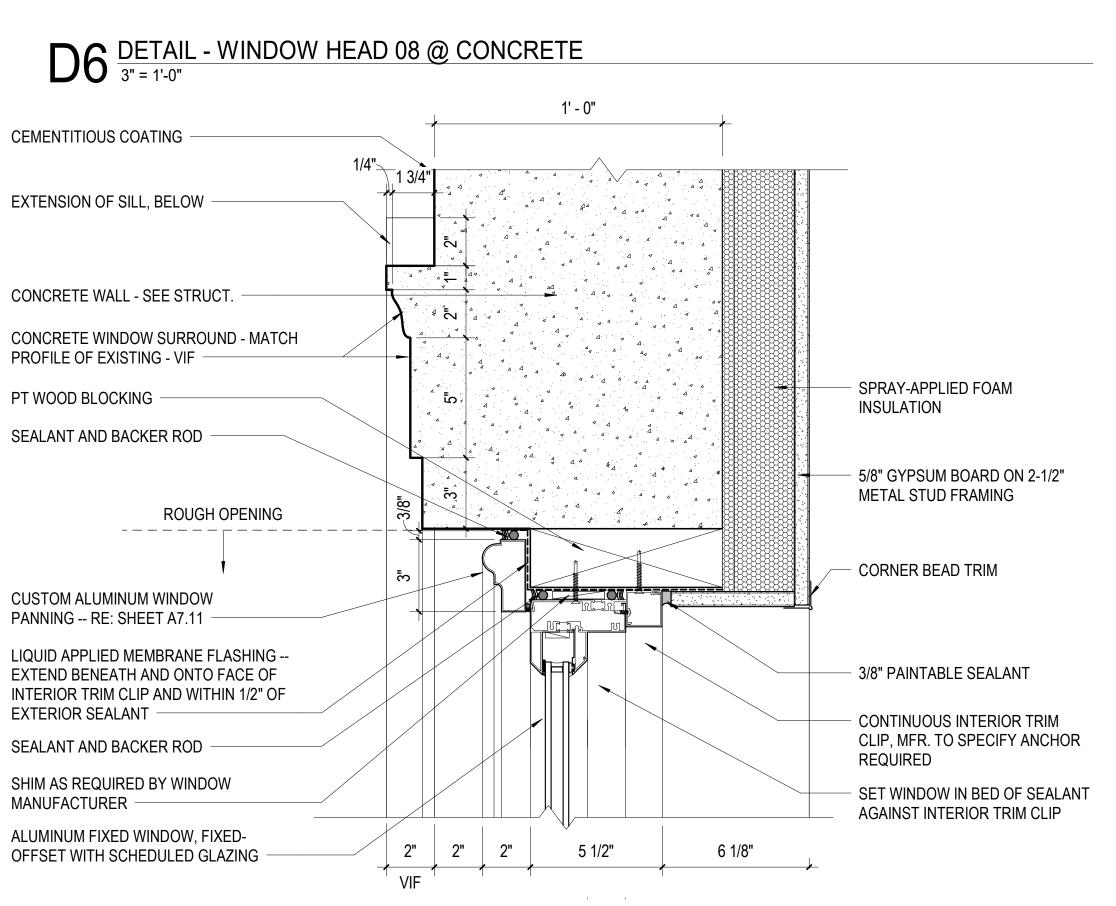

1' - 0"

4 4 4 4 4 4

5 1/2"

+ + +

6 1/8"

SPRAY-APPLIED FOAM

METAL STUD FRAMING

CORNER BEAD TRIM

3/8" PAINTABLE SEALANT

REQUIRED

INSULATION

CEMENTITIOUS COATING

CONCRETE WALL - SEE STRUCT.

PROFILE OF EXISTING - VIF

SEALANT AND BACKER ROD

CUSTOM ALUMINUM WINDOW

PANNING -- RE: SHEET A7.11

SEALANT AND BACKER ROD

SHIM AS REQUIRED BY WINDOW

ALUMINUM FIXED WINDOW, FIXED-

OFFSET WITH SCHEDULED GLAZING

EXTERIOR SEALANT

MANUFACTURER

LIQUID APPLIED MEMBRANE FLASHING

EXTEND BENEATH AND ONTO FACE OF


INTERIOR TRIM CLIP AND WITHIN 1/2" OF


PT WOOD BLOCKING

CONCRETE WINDOW SURROUND - MATCH

ROUGH OPENING

SLOPE 1/2" / FT MIN

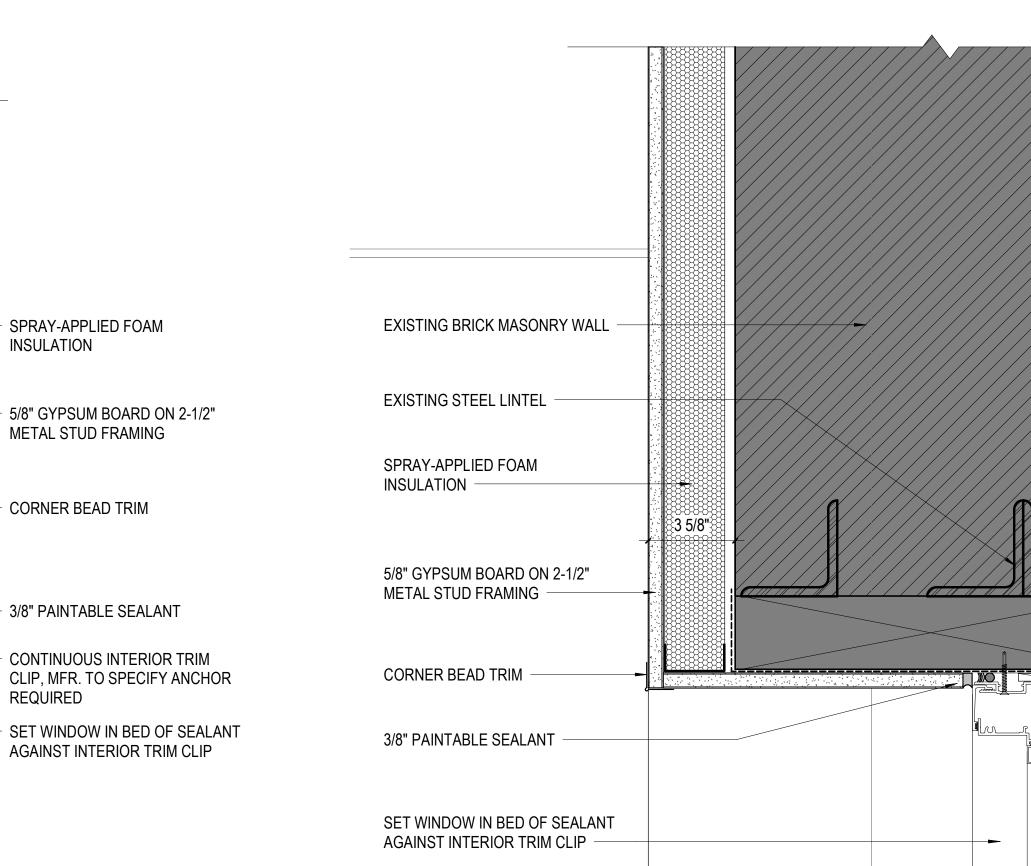

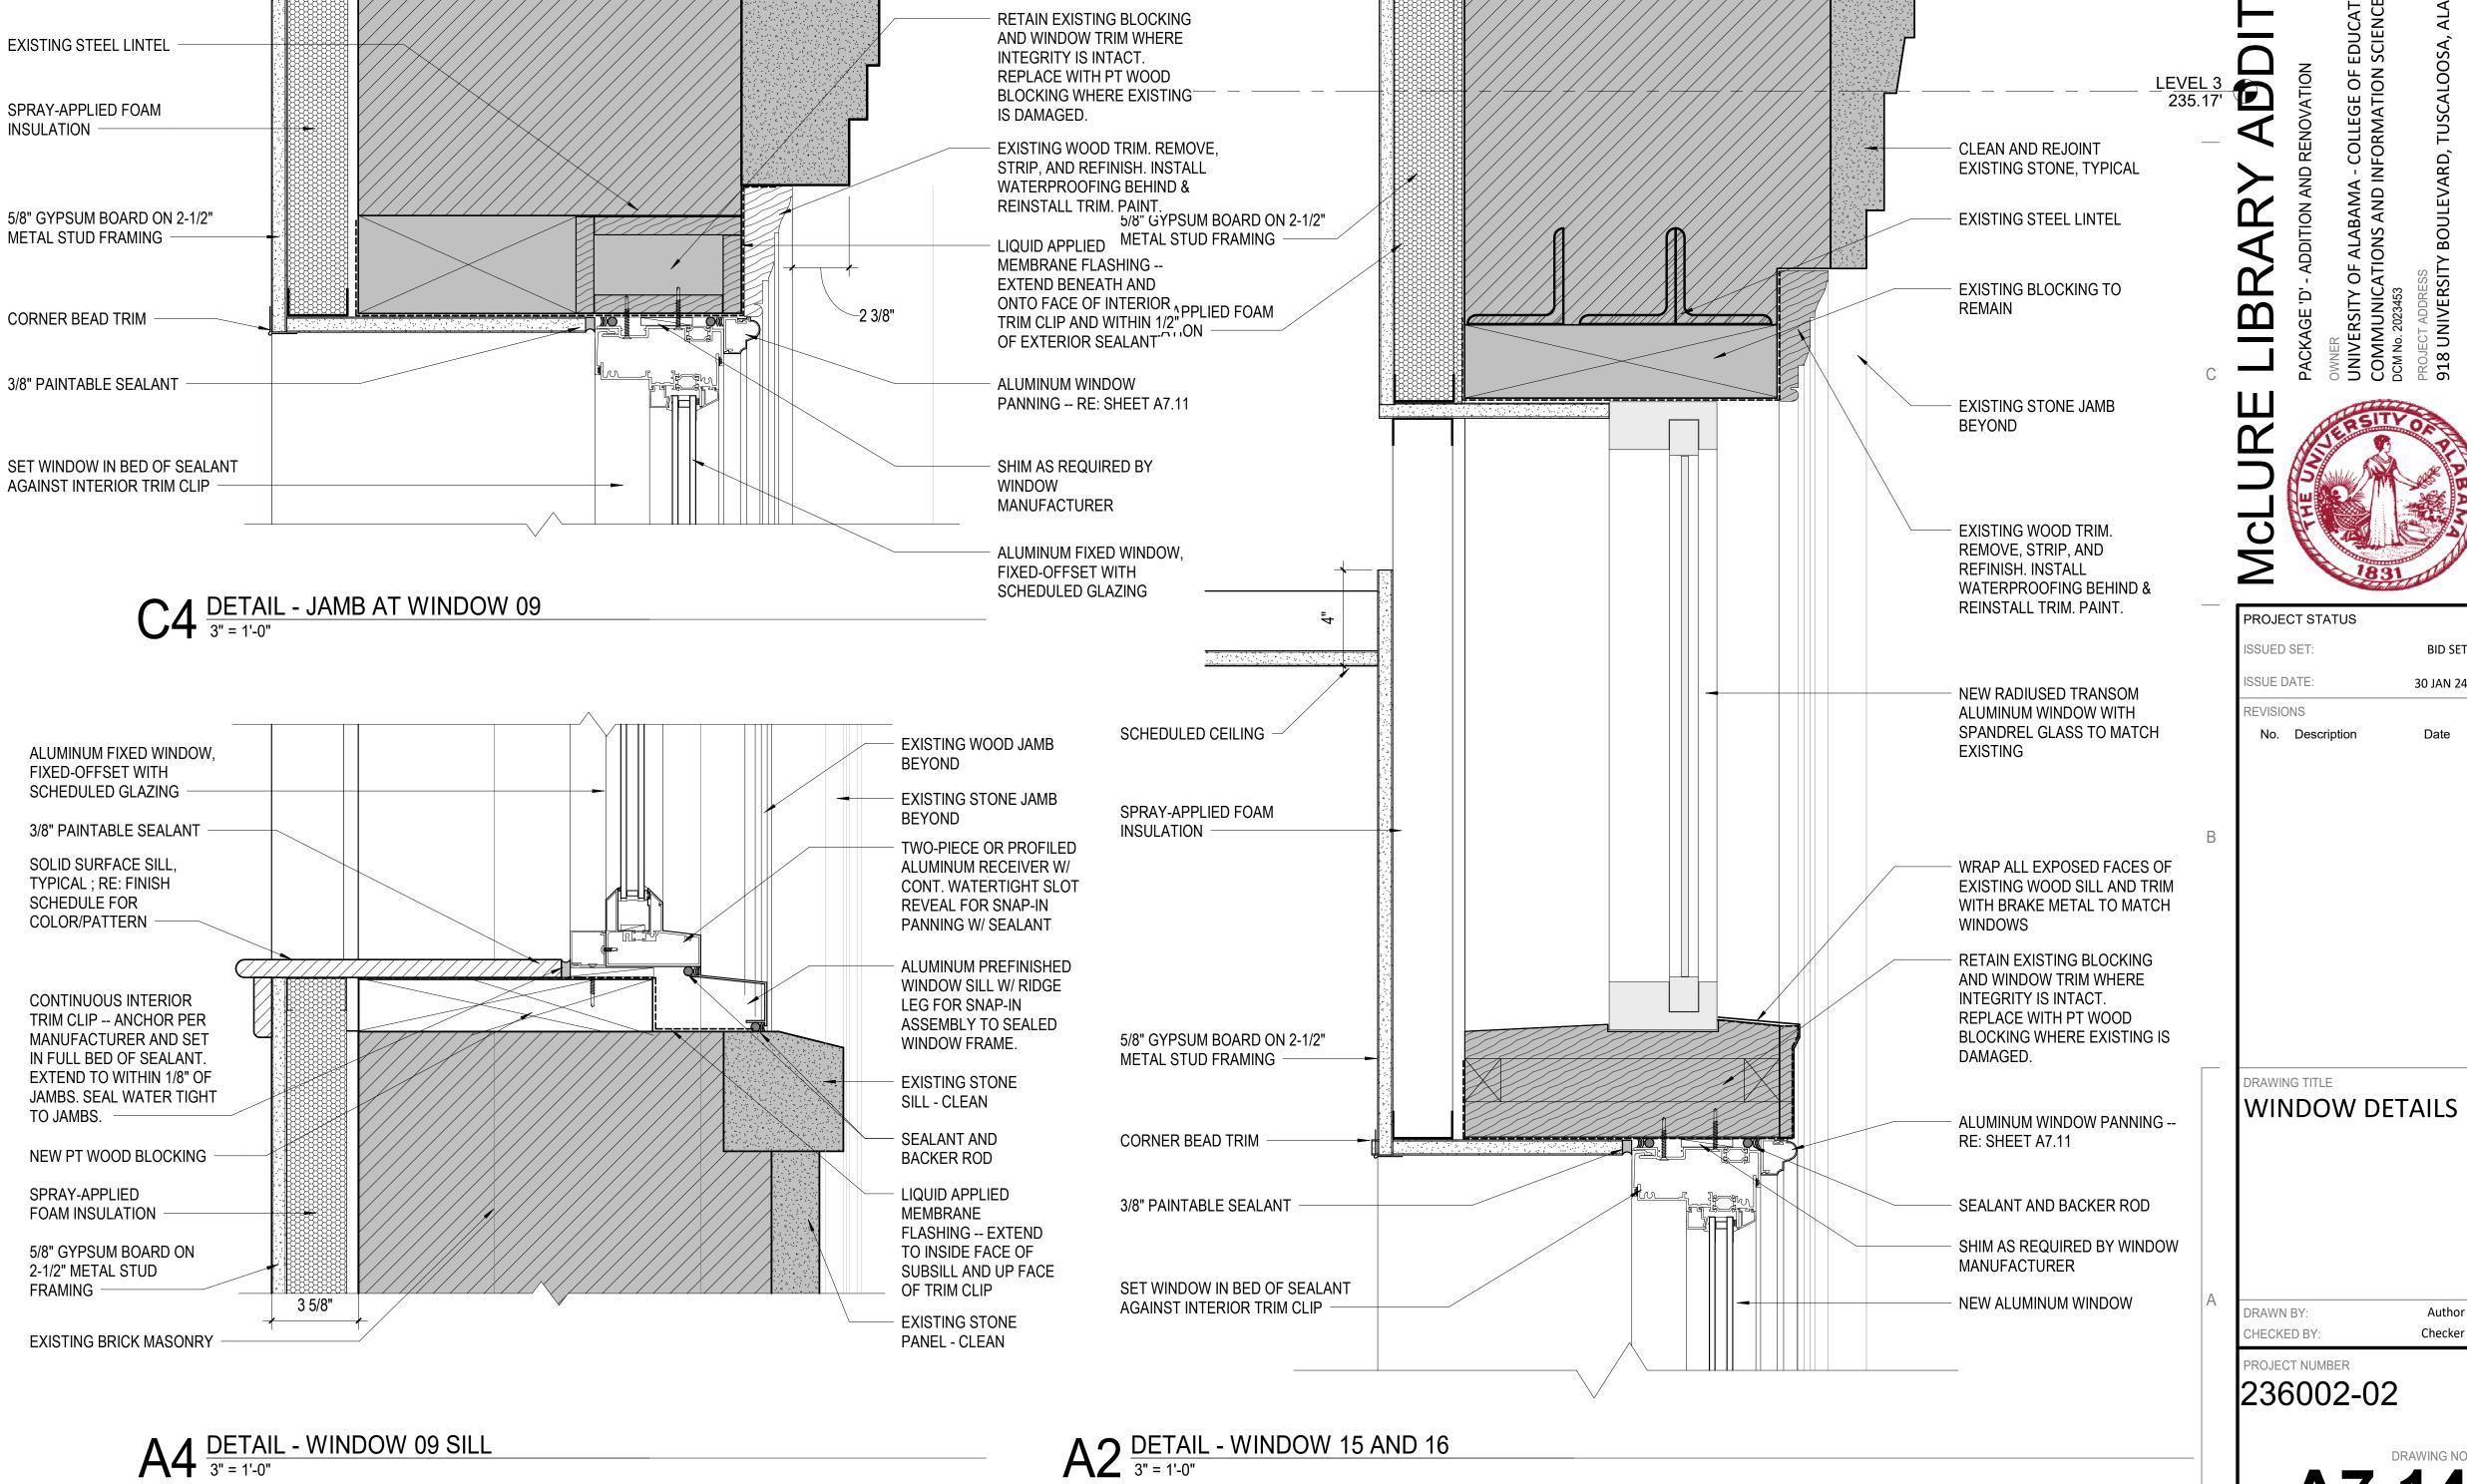

MANUFACTURER


CLEAN AND REJOINT

EXISTING STONE, TYPICAL

ALUMINUM FIXED WINDOW, FIXED-OFFSET WITH SCHEDULED GLAZING

D4 DETAIL - HEAD AT WINDOW 09 3'' = 1'-0''

EXISTING BRICK MASONRY WALL

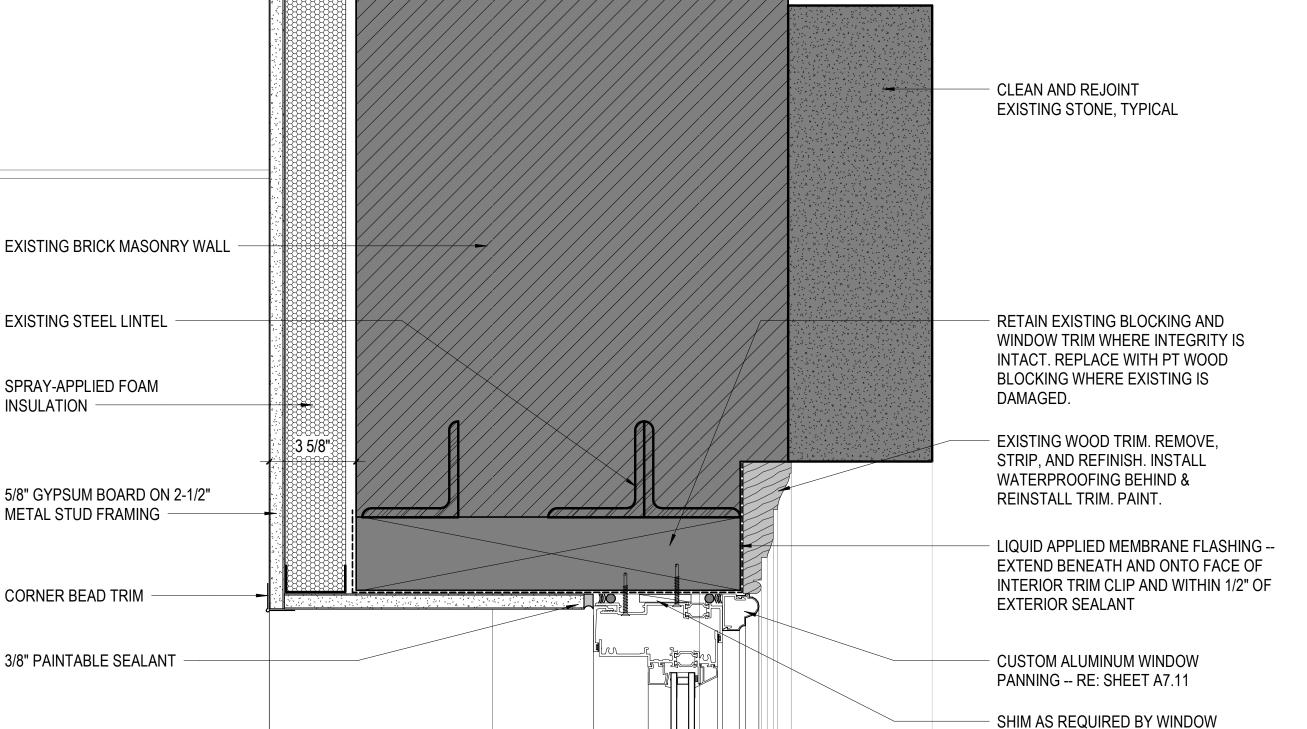

the Architect. Any use without the knowledge and written consent of the Architect is prohibited. The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract Documents. 3531 By DONALD C. SIMPSON

PROJECT STATUS

No. Description

RAWING TITLE

RAWN BY:

HECKED BY:

ROJECT NUMBER

BID SET

30 JAN 24

SSUED SET:

SSUE DATE:


REVISIONS

EXISTING BRICK MASONRY WALL

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this

Project and is the sole and exclusive property of

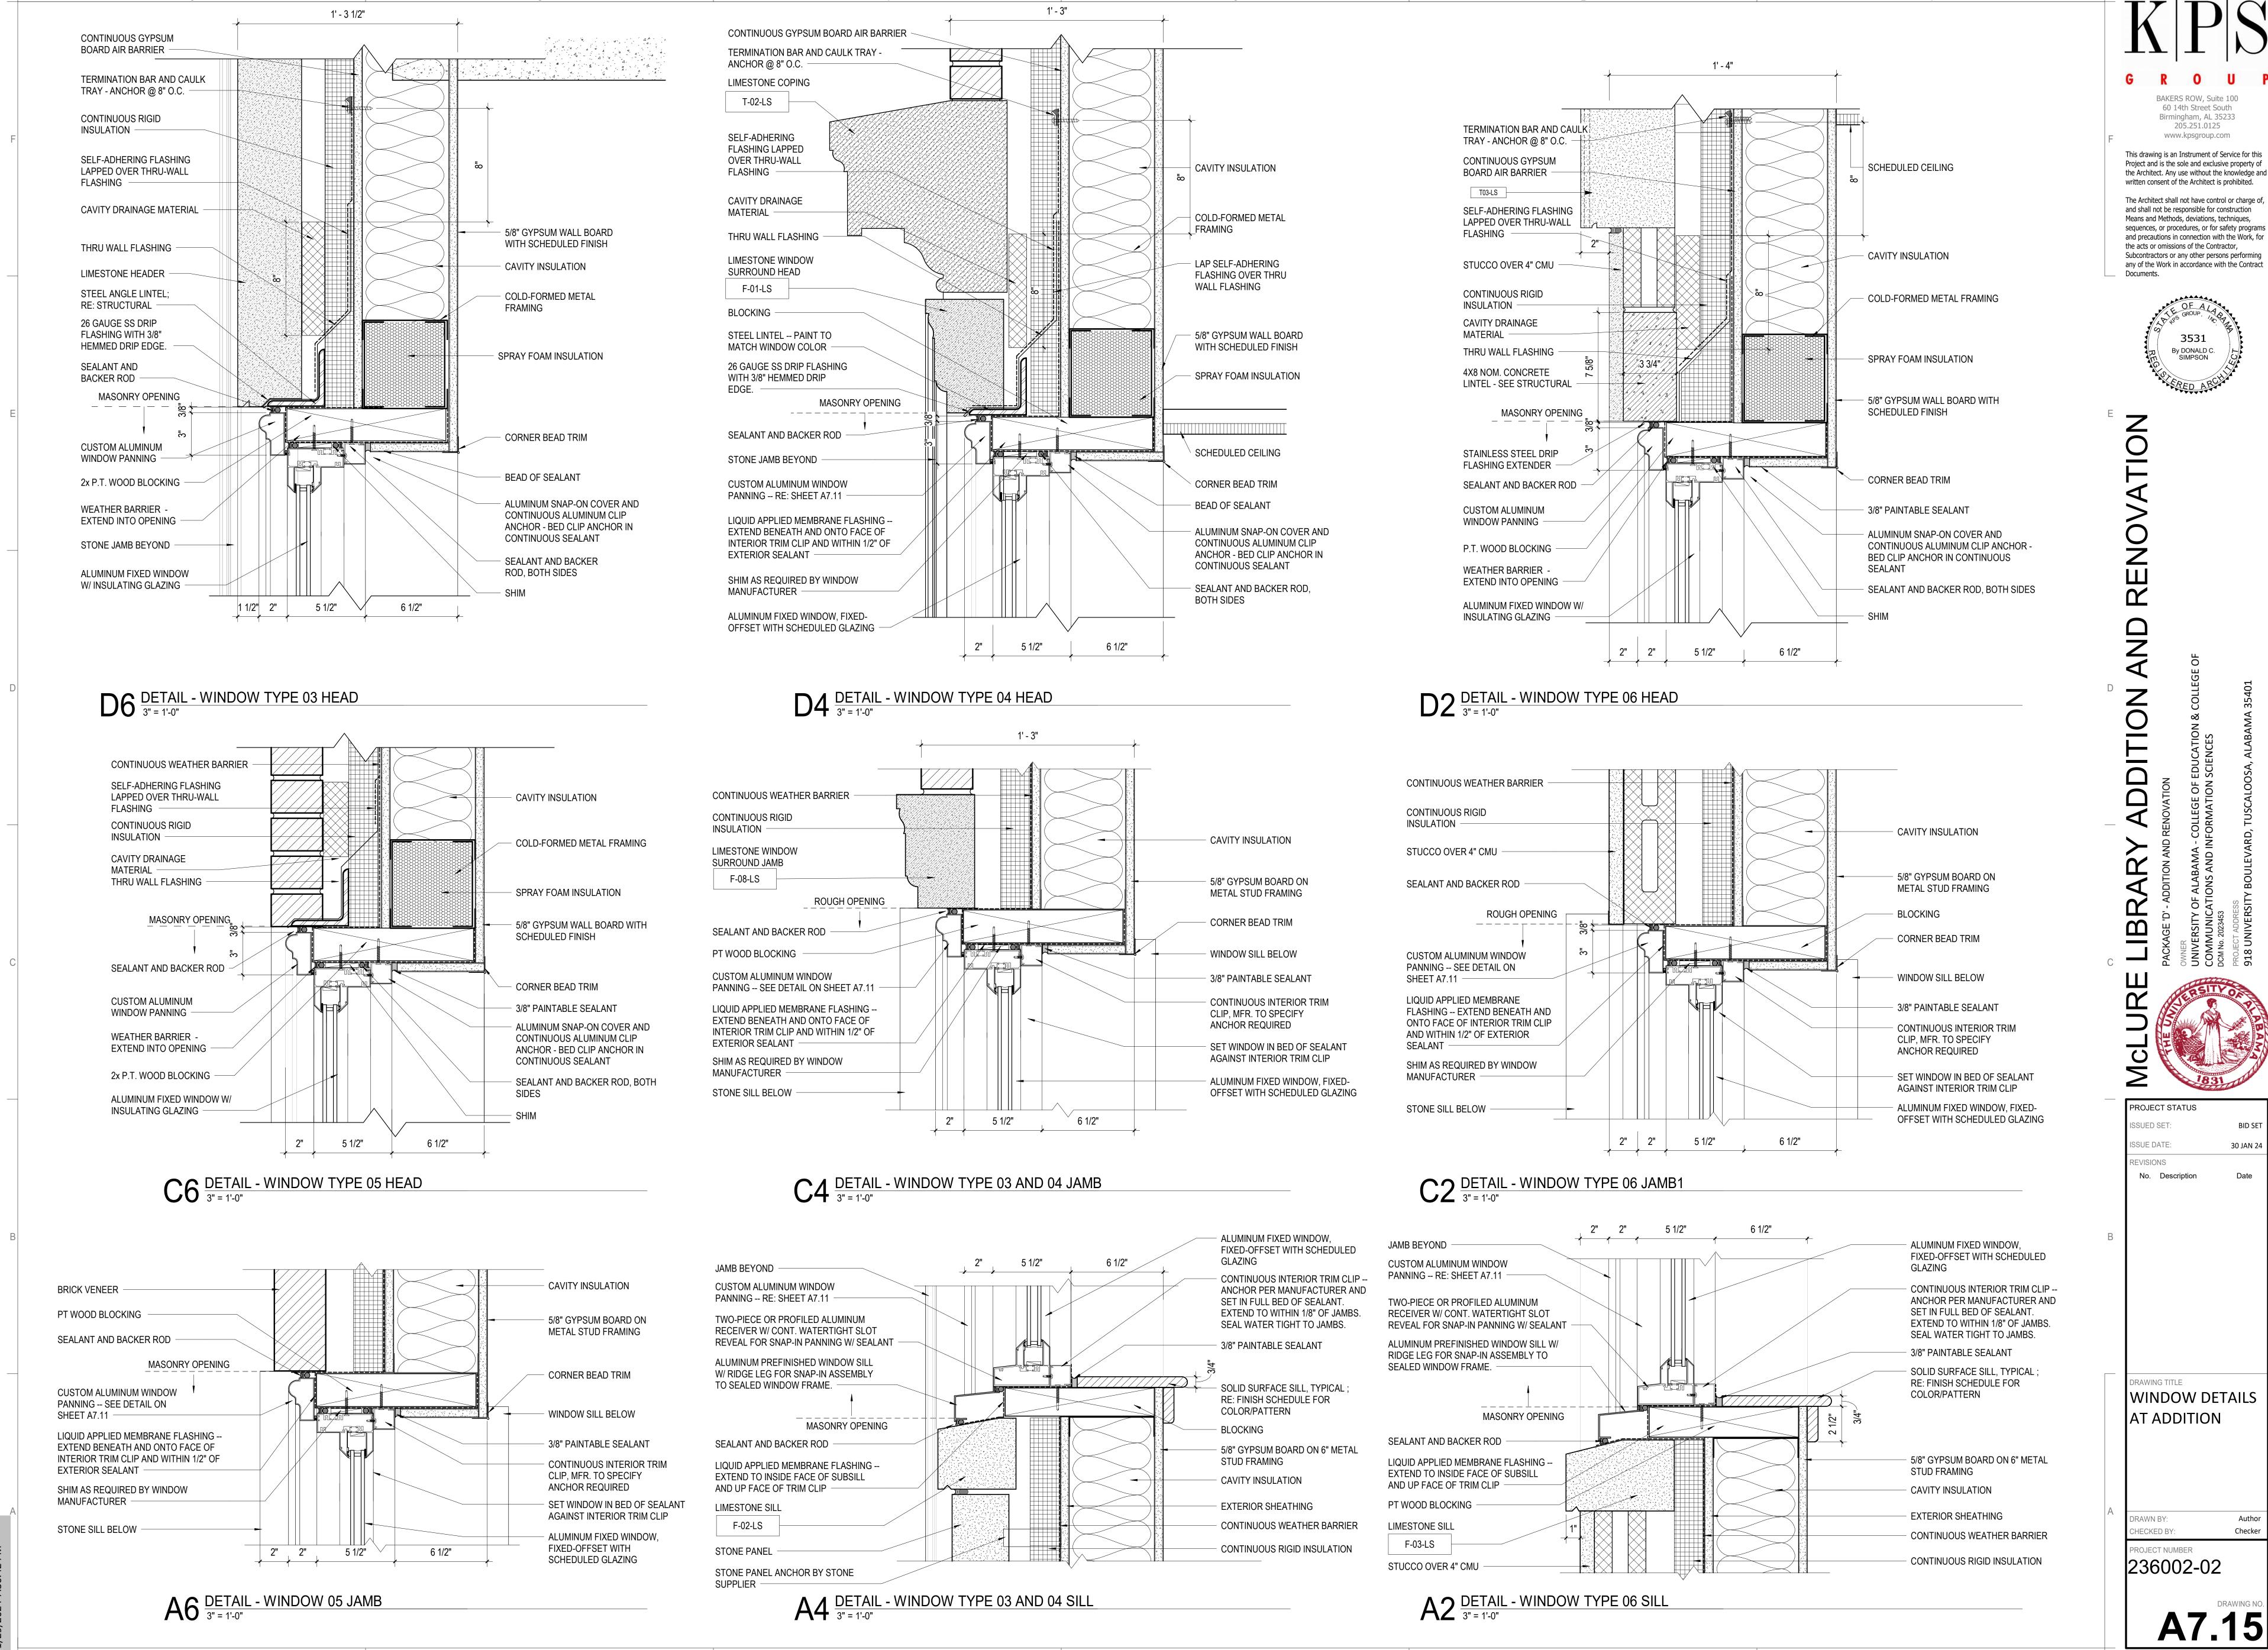

Z < \Box

BID SET

30 JAN 24

BAKERS ROW, Suite 100


60 14th Street South Birmingham, AL 35233

205.251.0125

www.kpsgroup.com

3531

By DONALD C. SIMPSON

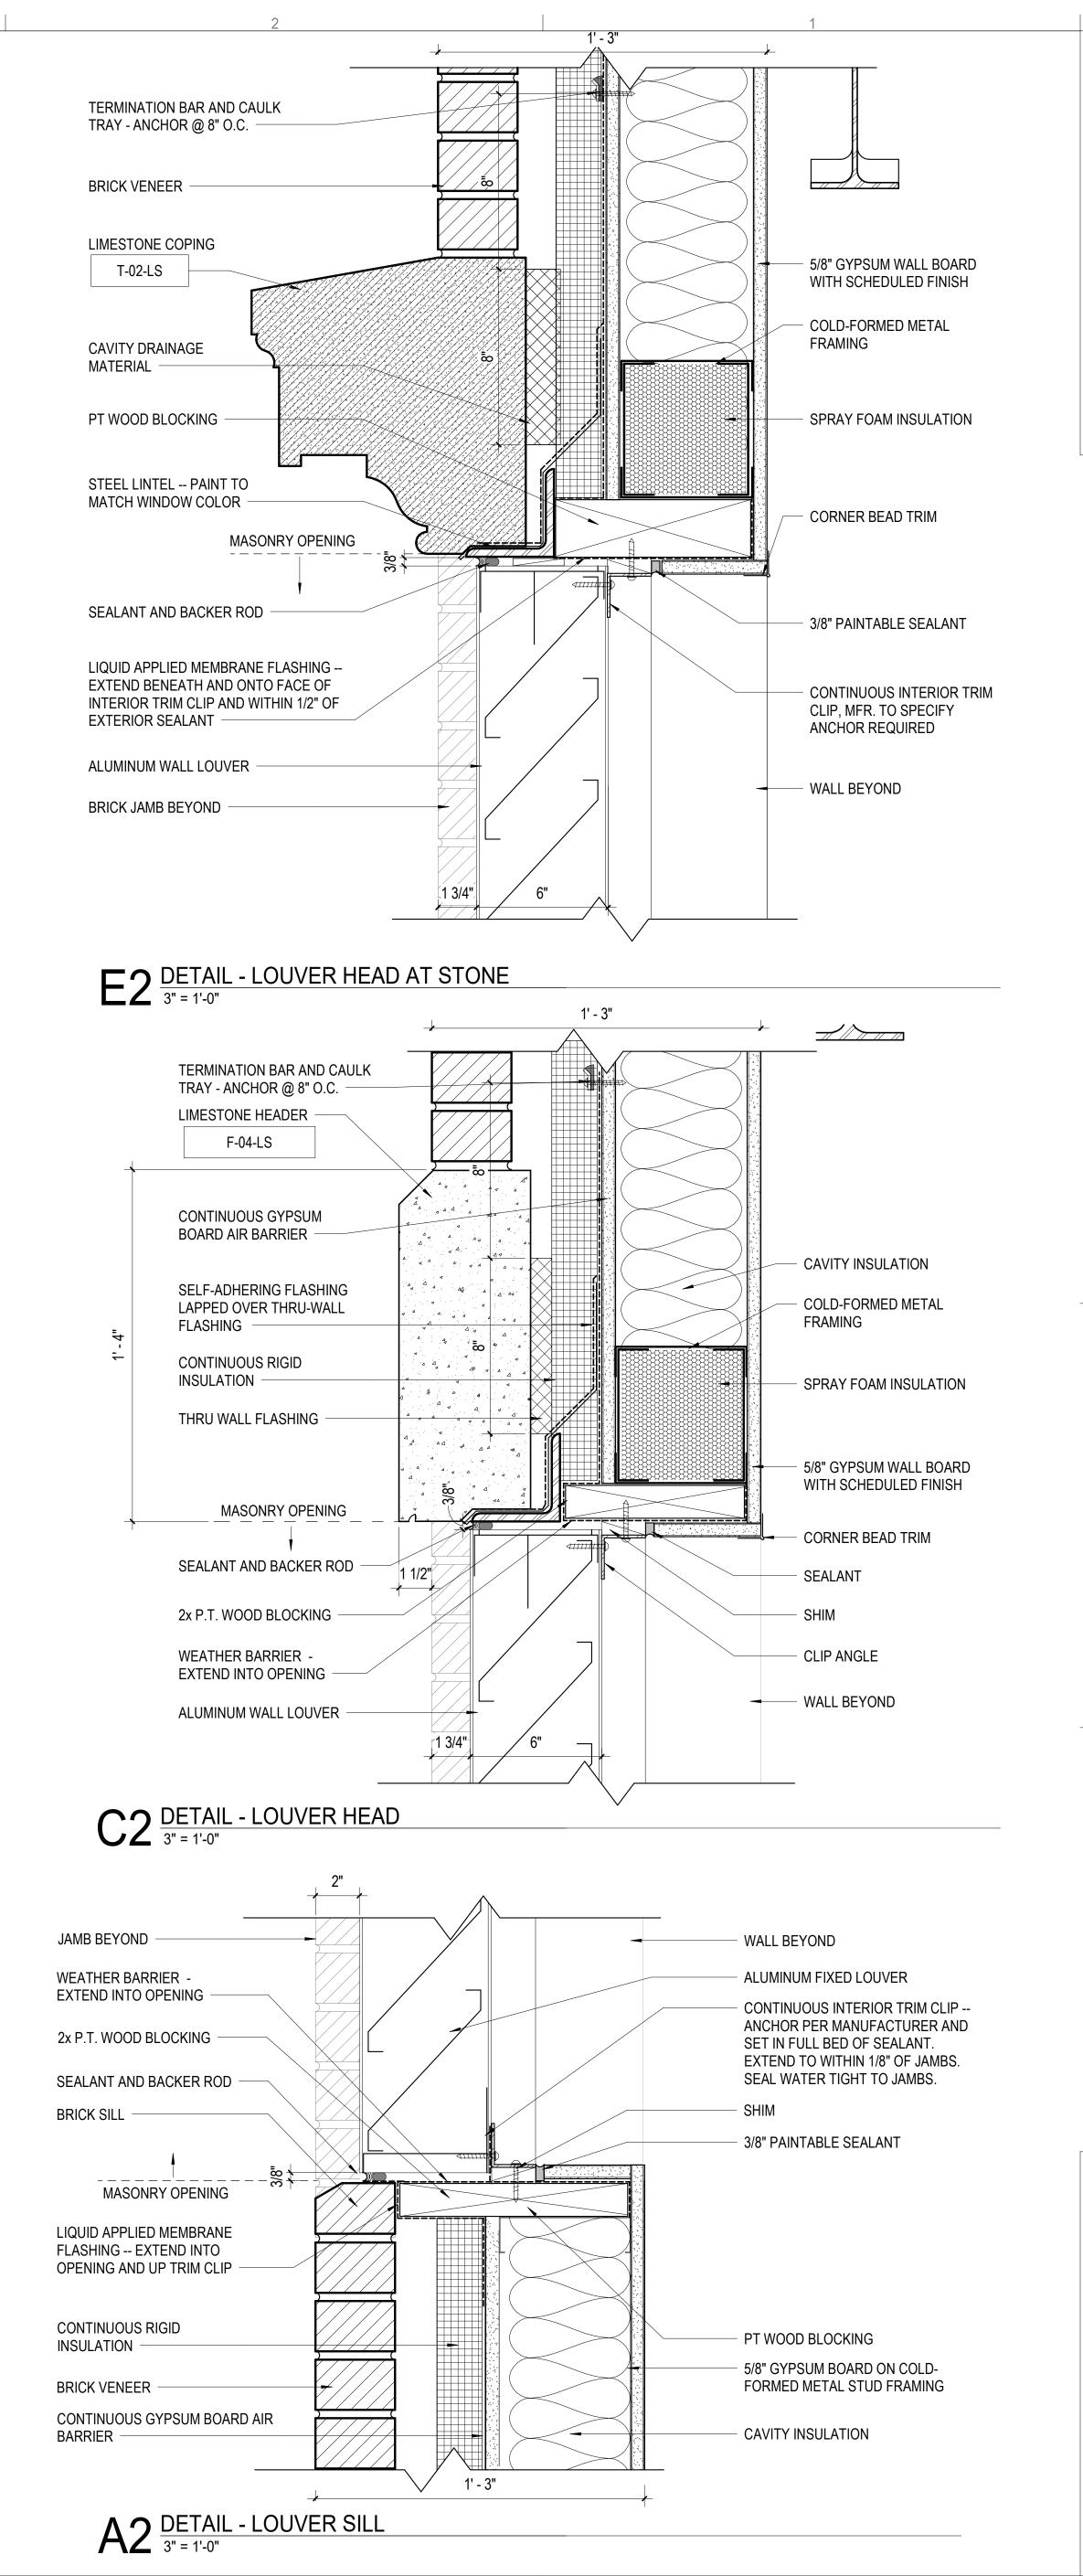


BAKERS ROW, Suite 100
60 14th Street South
Birmingham, AL 35233
205.251.0125
www.kpsgroup.com

205.251.0125
www.kpsgroup.com

This drawing is an Instrument of Service f
Project and is the sole and exclusive prop

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract Documents.



3531
By DONALD C
SIMPSON

JRE LIBRARY ADDITION AND RENOVATION

PACKAGE 'D' - ADDITION AND RENOVATION

OWNER

PROJECT STATUS
ISSUED SET:
ISSUE DATE:
30 JAN 24

SSUE DATE: 30 JAN 24
REVISIONS
No. Description Date

DRAWING TITLE
LOUVER DETAILS

DRAWN BY: Auth CHECKED BY: Check

PROJECT NUMBER 236002-02

A7.16

CONTACT: LESLIE GALIFIANAKIS

CONTACT: STEPHANIE CALDARELLO

NOTES: MATCHING 3mm PVC EDGED

SS-1 MANUFACTURER: CORIAN

INSTALLATION:

NOTES: COUNTERS & WINDOW SILLS

PRODUCT:

COLOR / FINISH: | CLEAR SIZE: PROFILE: CONTACT: PHONE / EMAIL:

FOR FINAL APPROVAL

SPECIES: WALNUT

ST-1 MANUFACTURER:

COLOR / FINISH: BISQUE

SIZE:

PHONE / EMAIL: /LESLIE.GALIFIANAKIS@FORMICA.COM

PHONE / EMAIL: 205.377.2285/ SCALDARELLO@OLDENKAMP.COM

NOTES: DOORS. PROVIDE 12"X12" SAMPLE PRIOR TO FABRICATION ON ACTUAL SPECIES

MATERIAL NOTES - PAINT AND WALLCOVERING GENERAL FINISH NOTES

- PRIOR TO THE APPLICATION OF PAINT AND WALL COVERING. THE CONTRACTOR SHALL REPAIR NEW SURFACES BY PATCHING. SMOOTHING. AND SANDING AS NEEDED TO ACHIEVE A SURFACE ACCEPTABLE FOR THE APPLICATION OF NEW FINISH. PREPARE DOOR FRAMES OR METAL SURFACES BY SANDING CHIPS/BURRS, FILLING DENTS AND CAULKING CRACKS AT CORNERS AS REQUIRED.
- UNLESS OTHERWISE STATED IN THE SPECIFICATIONS, ALL PAINTED SURFACES ARE TO RECEIVE ONE PRIME AND A MINIMUM OF TWO FINISH COATS. PRIME ALL SURFACES ACCORDING TO MANUFACTURERS SPECIFICATIONS PRIOR TO APPLICATION OF PAINT. THE NUMBER OF COATS SPECIFIED IS THE MINIMUM NUMBER REQUIRED. APPLY ADDITIONAL COATS WHEN UNDERCOATS, STAINS, OR OTHER CONDITIONS SHOW THROUGH FINAL COAT OF PAINT AND UNTIL PAINT FILM IS OF UNIFORM FINISH, COLOR, AND APPEARANCE.
- CAULK ALL DOOR FRAMES, MILLWORK AND VIEW WINDOW FRAMES AFTER WALLCOVERING INSTALLATION IS COMPLETE. COLOR OF CAULK TO MATCH ADJACENT FINISH, UNLESS OTHERWISE NOTED
- MISCELLANEOUS METAL (RETURN AND AIR SUPPLY GRILLES, EXPANSION JOINTS, ETC.) LOCATED ON WALL SURFACES IS TO BE PAINTED TO MATCH
- ALL EXISTING GYPSUM BOARD SOFFITS AND BULKHEADS WITHIN SCOPE OF WORK SHALL BE PAINTED CEILING WHITE UNLESS OTHERWISE NOTED.
- WHERE PAINT IS SPECIFIED, GYPSUM BOARD SOFFITS ABOVE WALL CABINETS SHALL BE PAINTED THE SAME COLOR AS THE ADJACENT WALL UNLESS OTHERWISE NOTED.
- WHEN WALL COVERING IS SPECIFIED, PROVIDE A MINIMUM OF 1 COAT OF WALL COVERING PRIMER AS RECOMMENDED BY WALL COVERING MANUFACTURER TO WALL SURFACES NOT PREVIOUSLY PAINTED.
- DO NOT PAINT ITEMS REQUIRED BY CODE TO BE A CERTAIN COLOR SUCH AS FIRE ALARM PULLS, ETC.
- ALL PAINT GRADE ARCHITECTURAL MILLWORK (WOOD TRIM, ETC., IF APPLICABLE TO BE SEMI-GLOSS FINISH. REFER TO ELEVATIONS. SECTIONS, AND DETAILS FOR COLORS.
- ALL HOLLOW METAL DOOR FRAMES AND INTERIOR HOLLOW METAL WINDOW FRAMES TO BE PAINTED AS INDICATED IN THE FINISH MATERIAL LEGEND UNLESS OTHERWISE NOTED.

MATERIAL NOTES - FLOORING

ADJACENT WALL COLOR.

- WHEN CARPET TILES ARE SPECIFIED, ALWAYS REFER TO THE MANUFACTURERS RECOMMENDED INSTALLATION PROCEDURES BEFORE INSTALLING THE PRODUCT. INSTALL CARPET TILES WITH ADHESIVES RECOMMENDED BY THE MANUFACTURER. SNAP A CHALK LINE TO FORM FOUR QUADRANTS AT 90 DEGREE ANGLES TO INSURE THE TILES ARE LAID STRAIGHT. START INSTALLATION OF CARPET TILES AT THE CENTER OF THE ROOM AND LAY-OUT IN A MANNER SO THAT CUT TILE DIMENSIONS ARE MAXIMIZED AT THE PERIMETER UNLESS NOTED OTHERWISE
- CARPET TILES WILL HAVE ARROWS EMBOSSED ON THE BACK SHOWING PILE DIRECTION. REFER TO FINISH MATERIAL LEGEND FOR INSTALLATION METHOD. (1/4 TURN, MONOLITHIC, ETC.)
- WHERE FLOORING AND/OR BASE IS SPECIFIED, THE SAME FLOOR COVERING AND/OR BASE SHALL EXTEND INTO ANY CLOSETS, STORAGE AREA, ETC. ADJACENT TO THE SPACE UNLESS OTHERWISE NOTED.
- REFER TO FINISH MATERIAL LEGEND AND INTERIOR DETAILS FOR TRANSITIONS BETWEEN FLOORING MATERIAL TYPES. CONTACT THE INTERIOR DESIGNER ON ANY TRANSITION NOT SPECIFIED OR INDICATED.
- WHERE SIMILAR MATERIALS (SUCH AS VCT) ARE USED IN ADJACENT SPACES. TRANSITION MATERIALS AT THE CENTERLINE OF DOOR IN CLOSED POSITION WITH A TRANSITION CUT ONLY. DO NOT INSTALL FEATURE STRIPS OR OTHER TRANSITION MATERIALS AT VCT TO VCT OR OTHER (SIMILAR FLOORING MATERIAL) BETWEEN ROOMS AND SPACES UNLESS OTHERWISE
- WHERE FLOOR PATTERNS TERMINATE AT A DOOR OPENING, EXTEND PATTERN INTO DOORWAY AND TERMINATE BELOW DOOR PANEL IN CLOSED POSITION.
- AT ALL FLOORING TRANSITIONS BETWEEN PORCELAIN/ CERAMIC TILE AND CARPET OR VINYL TILE USE "SCHEINE" EXTENDED ALUMINUM TRANSITION BY SCHLUTER SYSTEMS, UNLESS OTHERWISE NOTED. REFER TO FLOORING TRANSITION DETAILS.

- ALL FINISH MATERIALS SHALL BE SUPPLIED AS INDICATED IN THE FINISH MATERIAL LEGEND. NO SUBSTITUTIONS WILL BE ALLOWED UNLESS
- APPROVED IN WRITING BY THE ARCHITECT / DESIGNER. FOR CLARIFICATION OF MULTIPLE FINISH LOCATIONS, MILLWORK CASEWORK OR OTHER SPECIAL TREATMENT AREAS, REFER TO THE

ELEVATIONS. SECTIONS AND DETAILS. IF QUESTIONS ARISE. CONTACT THE

- REFER TO FINISH PLANS, FLOOR PATTERN PLANS, ELEVATIONS, DETAILS AND FINISH MATERIAL LEGEND FOR ADDITIONAL CLARIFICATION OF WORK TO BE PERFORMED.
- ALL FINISH APPLICATIONS SHALL BE FREE OF IMPERFECTIONS.

ARCHITECT / DESIGNER.

- ALL SURFACES TO RECEIVE A FINISH APPLICATIONS SHALL BE COMPLETELY SMOOTH. IF SURFACES ARE NOT ACCEPTABLE TO RECEIVE FINISHES, NOTIFY THE GENERAL CONTRACTOR AND HAVE SURFACES CORRECTED PRIOR TO BEGINNING FINISH WORK.
 - CONTRACTOR SHALL PROVIDE SUBMITTALS TO THE ARCHITECT / DESIGNER PRIOR TO FABRICATING OR PURCHASING MATERIALS. ALL SUBMITTALS SHALL BE CLEARLY MARKED WITH MANUFACTURER, STYLE COLOR AND FINISH MATERIAL LEGEND CODE. PAINT SUBMITTALS SHALL INCLUDE STORE LOCATION AND PAINT COLOR FORMULA. ALL ITEMS SHALL BE SUBMITTED WITH ADEQUATE TIME FOR REVIEW AND RESUBMITTING IF NEEDED. WHERE FEASIBLE, ACTUAL PRODUCT SAMPLES SHALL BE SUBMITTED.
 - CAULK ALL PLUMBING FIXTURES, MILLWORK, AND TRIM TO ADJACENT SURFACES. COLOR OF CAULK TO MATCH ADJACENT FINISH. UNLESS OTHERWISE NOTED. REFER TO MILLWORK NOTES FOR CAULKING MILLWORK.
- SHOULD ANY QUESTIONS ARISE REGARDING THE FINISH DRAWINGS OR SPECIFICATIONS WHICH REQUIRE CLARIFICATION, THE ARCHITECT / DESIGNER IS TO BE CONSULTED BEFORE PROCEEDING. THE ARCHITECT DESIGNER IS NOT RESPONSIBLE FOR DISCREPANCIES THAT ARISE DUE TO CHANGES BY CONTRACTORS, CONSULTANTS, LANDLORDS, OR OWNERS AFTER THE DATE OF ISSUING OF THESE DRAWINGS.
- ITEMS REQUIRING FINISH SELECTIONS WHICH DO NOT APPEAR IN THE FINISH SCHEDULE SHALL BE SELECTED FROM SAMPLE SUBMITTALS MADE TO THE ARCHITECT / DESIGNER. REFER TO SPECIFICATION SECTIONS FOR ADDITIONAL SUBMITTAL REQUIREMENTS IN ADDITION TO MATERIAL SAMPLE SUBMITTALS INDICATED IN THE FINISH MATERIAL LEGEND.
- ALL PARTIES RESPONSIBLE FOR DELIVERING FINISHES TO THE SITE SHALL CHECK AVAILABILITY OF QUANTITIES AND DELIVERY DATES AS SOON AS CONTRACT IS AWARDED TO AVOID RE-SELECTION OF MATERIAL. SOME ITEMS MAY HAVE LONG LEAD TIMES.
- REFER TO SPECIFICATIONS FOR ADDITIONAL PRODUCT INFORMATION NOT INCLUDED IN THE FINISH LEGEND. NOTES OR PLANS
- CONTRACTOR TO PROVIDE SURPLUS STOCK AS INDICATED IN THE SPECIFICATIONS. SURPLUS STOCK SHALL BE PROVIDED ON EACH DIFFERENT PRODUCT MANUFACTURER, STYLE, COLOR AND FINISH SPECIFIED. REFER TO SPECIFICATIONS SECTION (IF APPLICABLE) FOR ADDITIONAL INFORMATION. FINAL PAYMENT SHALL NOT BE MADE UNTIL STOCK IS DELIVERED.
- LAY-OUT ALL WALL, FLOOR OR OTHER PATTERNS BASED UPON DIMENSIONS INDICATED. IF THE PATTERN PLACEMENT IS UNCLEAR DO NOT SCALE DRAWINGS. CONTACT THE ARCHITECT / DESIGNER FOR DIRECTION.

MATERIAL NOTES - MILLWORK

- CAULK ALL LAMINATE TO LAMINATE SEAMS WITH CAULK THAT MATCHES LAMINATE. DO NOT USE CLEAR CAULK.
- CAULK ALL LAMINATE/MILLWORK TO WALL WITH CAULK THAT MATCHES THE WALL COLOR.
- ALL SIDES AND EDGES OF INTERIOR SHELVING MUST BE LAMINATED. EDGES SHOULD BE COVERED IN 3MM PVC EDGE BANDING AS NOTED IN FINISH MATERIAL LEGEND.


TOILET ACCESSORY SCHEDULE						
TAG	DESCRIPTION	MANUFACTURER	MODEL	FINISH	COMMENTS	
TA-01	VERTICAL ADA GRAB BAR - 18" LONG	BOBRICK WASHROOM EQUIPMENT	B-9806x18	STAINLESS STEEL	CFCI	
TA-02	HORIZONTAL ADA GRAB BAR - 36" LONG	BOBRICK WASHROOM EQUIPMENT	B-9806x36	STAINLESS STEEL	CFCI	
TA-03	HORIZONTAL ADA GRAB BAR - 42" LONG	BOBRICK WASHROOM EQUIPMENT	B-9806x42	STAINLESS STEEL	CFCI	
TA-04	TOILET TISSUE DISPENSER				OFOI	
TA-06	PAPER TOWEL DISPENSER				OFOI	
TA-07	SOAP DISPENSER				OFOI	
TA-08	SANITARY NAPKIN DISPOSAL	BOBRICK WASHROOM EQUIPMENT	B-254 CLASSIC SERIES	STAINLESS STEEL	CFCI	
TA-09	BABY CHANGING STATION - RECESSED	KOALA KARE	KB310-SSRE	STAINLESS STEEL	CFCI	
TA-10	MIRROR	BOBRICK WASHROOM EQUIPMENT	B-165 2436	STAINLESS STEEL	CFCI	
TA-11	SANITARY NAPKIN DISPENSER	BOBRICK WASHROOM EQUIPMENT	B-370634 50	STAINLESS STEEL	CFCI	

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

written consent of the Architect is prohibited. The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing

any of the Work in accordance with the Contract



4

 \Box

BID SET SUED SET: SSUE DATE: 30 JAN 24 EVISIONS No. Description

ROJECT STATUS

RAWING TITLE FINISH LEGEND

HECKED BY:

PROJECT NUMBER 236002-02

INSTALLATION: POURED

CONTACT: BRAD HEDGES

PRODUCT: EPOXY TERRAZO

AGGREGATE 3: EXTREME WHITE #1, 40%

BASE COLOR: SNOWBOUND

AGGREGATE 4:

INSTALLATION: POURED


CONTACT: BRAD HEDGES

PHONE / EMAIL: 770.325.0725 /BRAD@SCSIGA.COM

AGGREGATE 1: CLASSIC MOTHER OF PEARL #3, 20%

PHONE / EMAIL: 770.325.0725 /BRAD@SCSIGA.COM

AGGREGATE 2: ITALIAN BOTTINCINA OR PERSIAN CREME #1, 40%

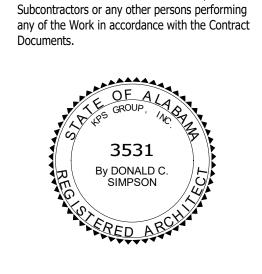

PROJECT STATUS SSUED SET: SSUE DATE: 30 JAN 24

REVISIONS

No. Description

RAWING TITLE


DETAILS

HECKED BY:

PROJECT NUMBER

236002-02

TILE TRANSITION

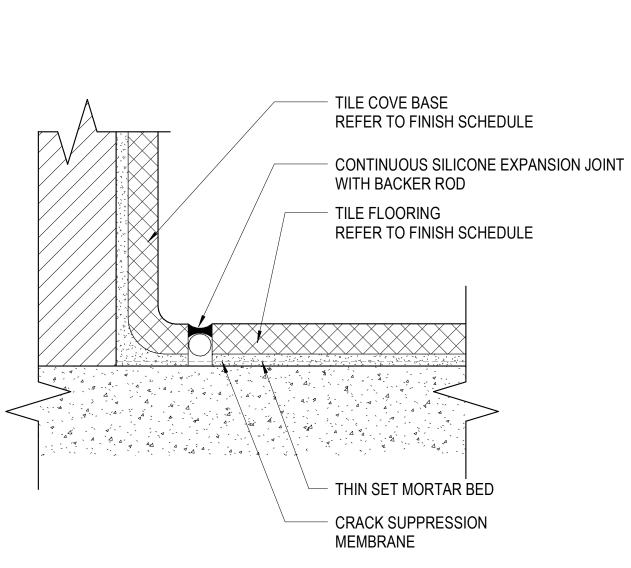

 $A1 \frac{\text{TILE COVE BASE}}{12" = 1'-0"}$

SCHLUTER "QUADEC" TRIM PROFILE

NOTE: COORDINATE PROFILE SIZE WITH SPECIFIED

TILE HEIGHT WALL TILE SUBSTRATE A3 TILE TERMINATION AT EDGE $\frac{12" = 1'-0"}{12"}$

-- WATER RESISTANT BACKER BOARD

-PROLITE THIN SET MORTAR

—SPECIFIED TILE

—SEALANT JOINT

—EPOXY GROUT

-REDGARD WATERPROOFING MEMBRANE-

SLOPE


-WEEP HOLES

CRUSHED TILE OR STONE

— SCHLUTER "QUADEC" TRIM PROFILE NOTE: COORDINATE PROFILE SIZE WITH SPECIFIED TILE HEIGHT WALL TILE SUBSTRATE

A2 TILE TERMINATION AT OUTSIDE CORNER 12" = 1'-0"

 $A5 \frac{\text{SLOPE TO DRAIN}}{6" = 1'-0"}$

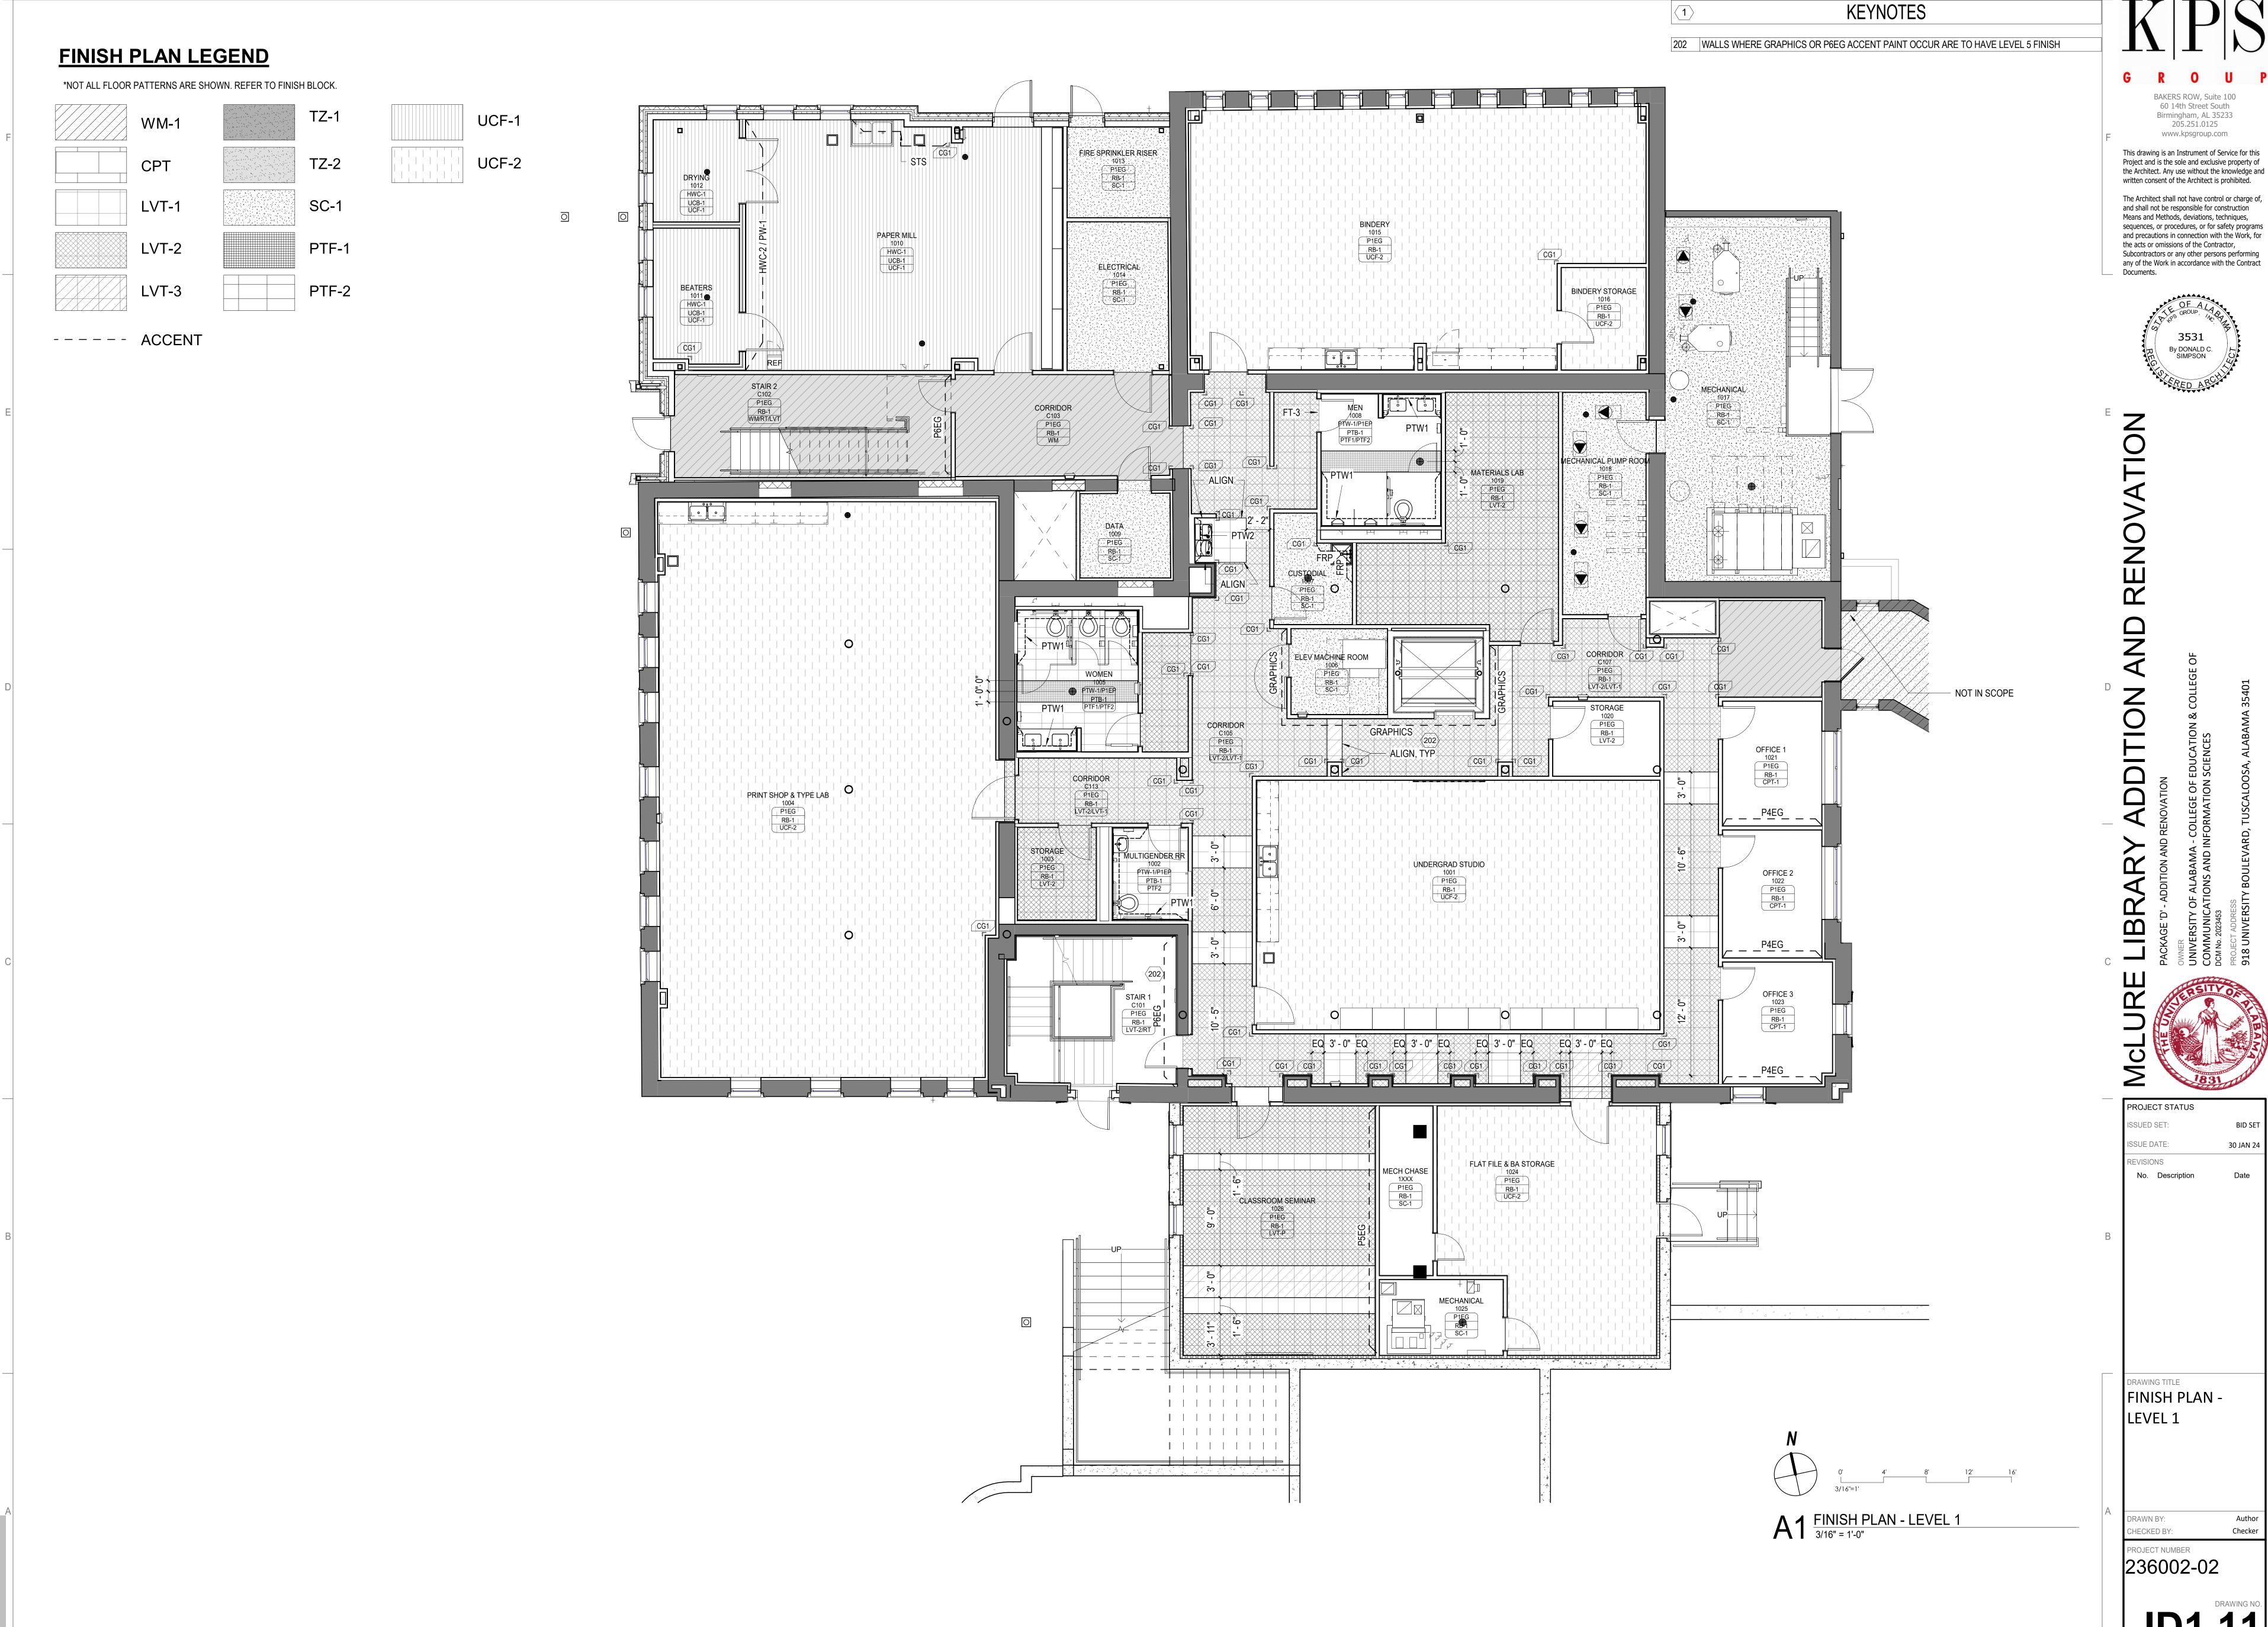




BAKERS ROW, Suite 100 60 14th Street South

Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract






PROJECT STATUS

No. Description

FINISH PLAN -

LEVEL 2

PROJECT NUMBER

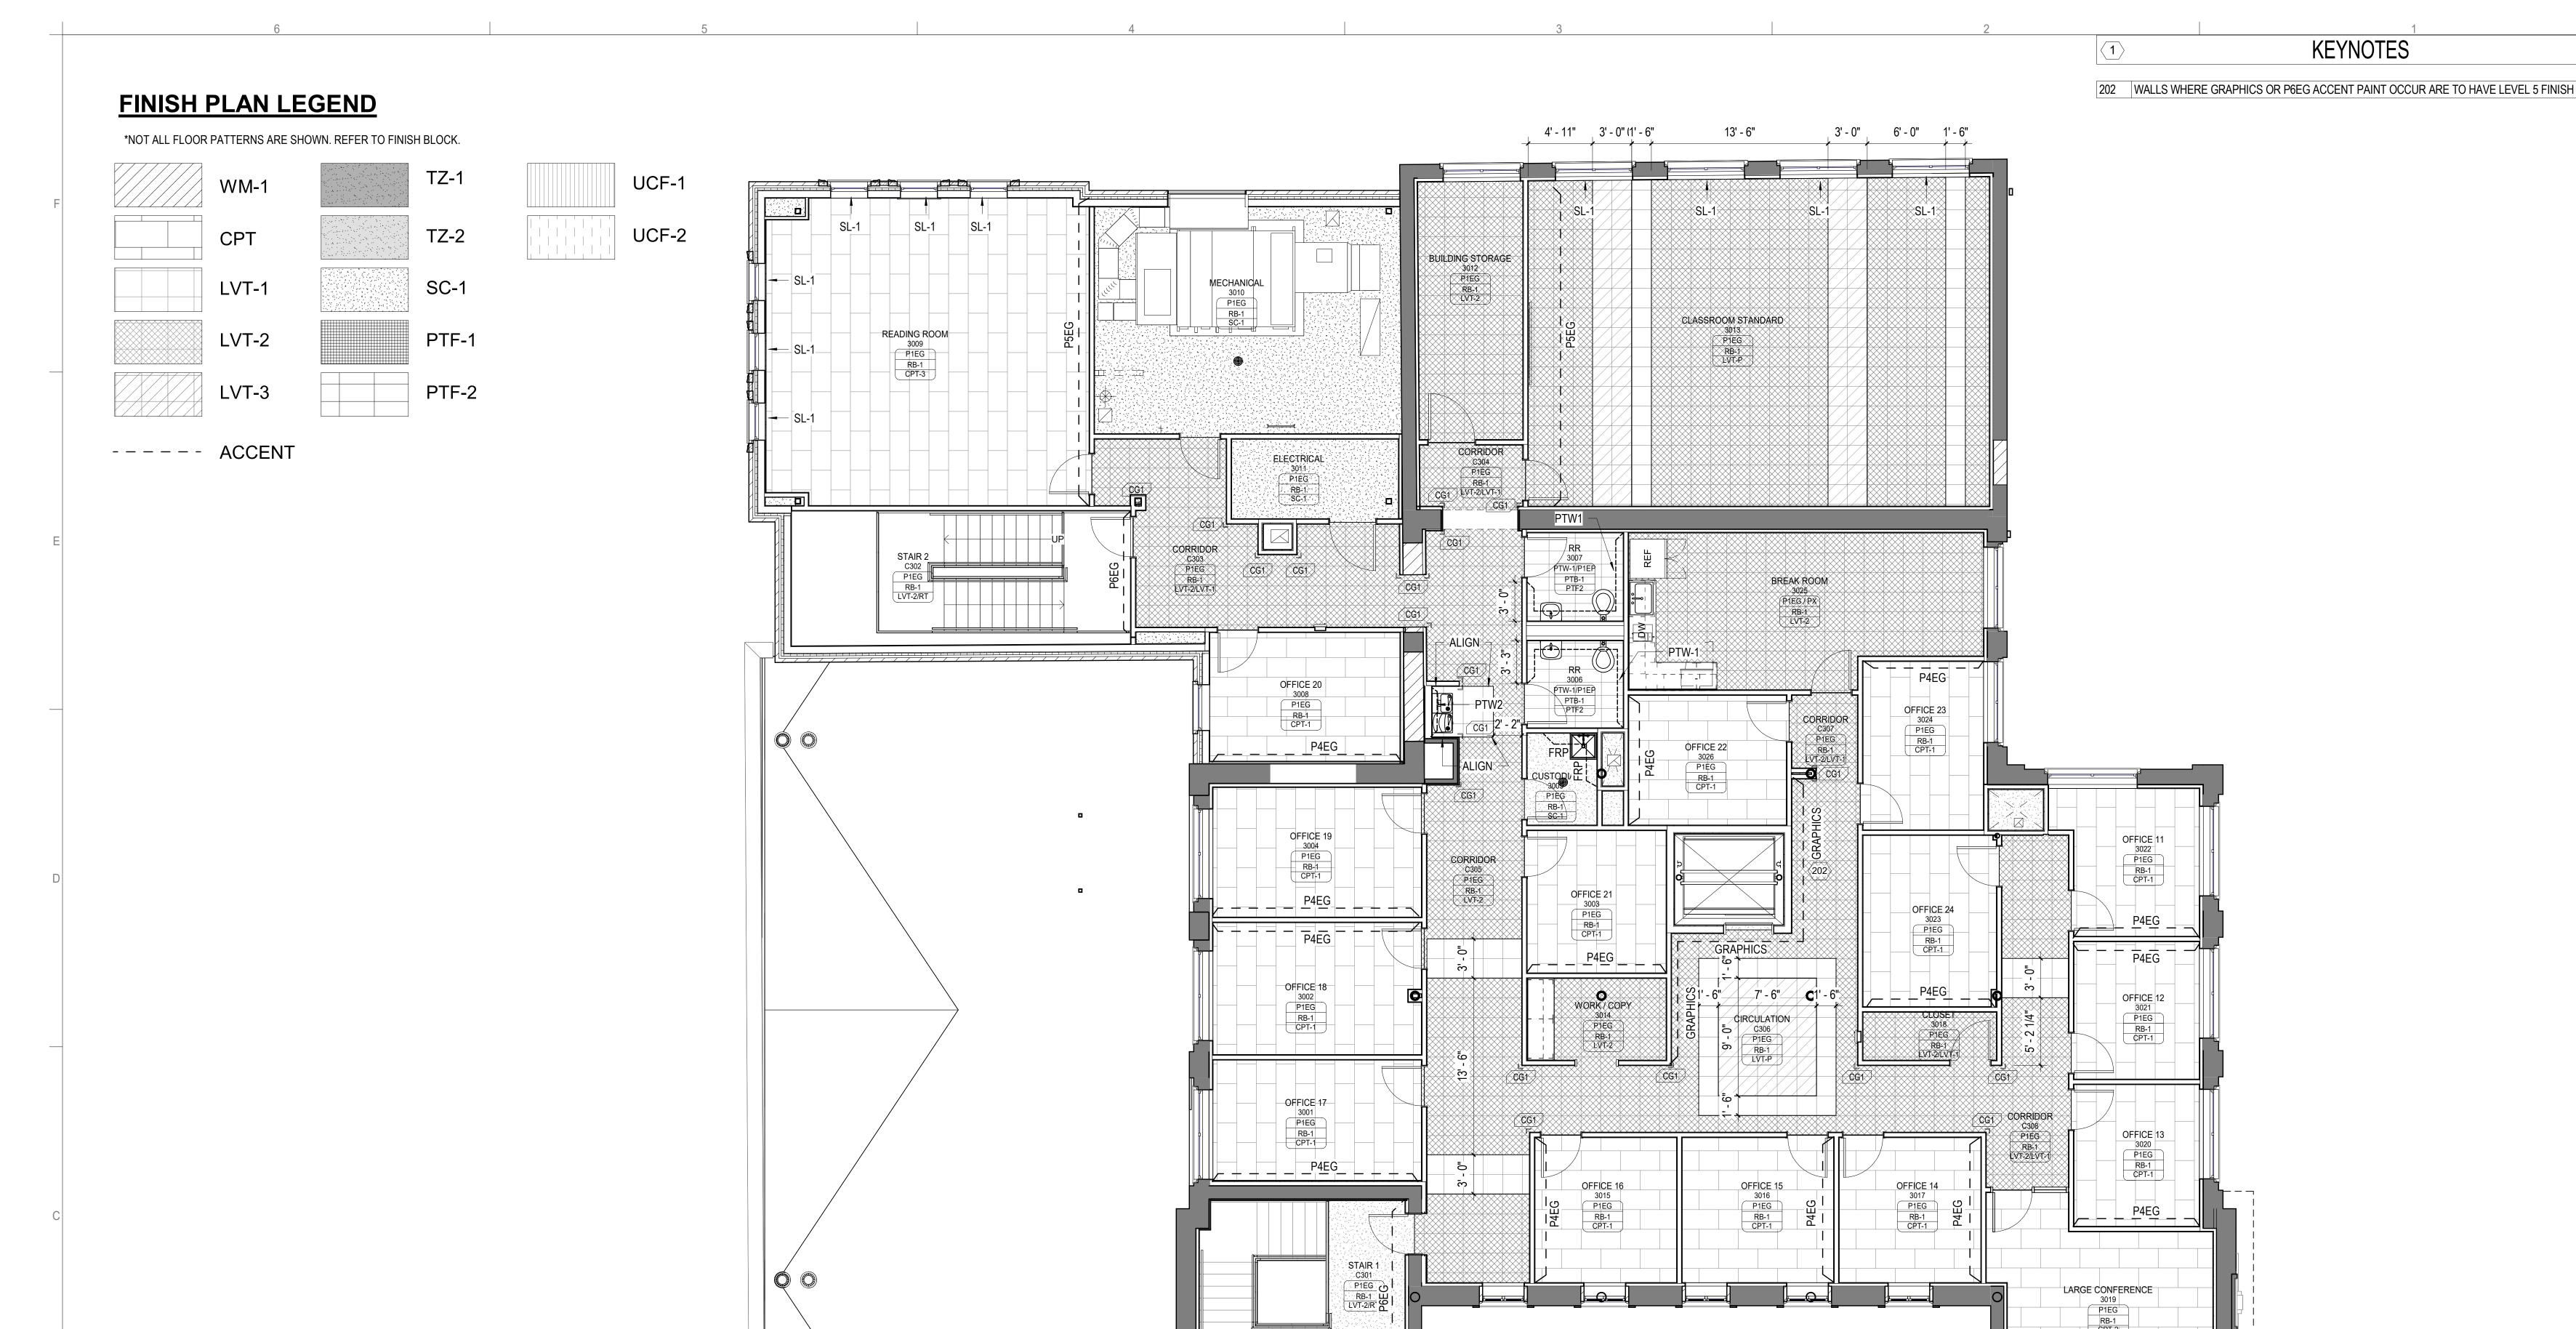


KPS

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract Documents.



IBRARY ADDITION AND RENOVATION
AGE 'D' - ADDITION AND RENOVATION

OWNER

OWNER

UNIVERSITY OF AL

COMMUNICATION

DCM No. 2023453

PROJECT ADDRESS

918 UNIVERSITY B

PROJECT STATUS

ISSUED SET: BID SET

ISSUE DATE: 30 JAN 24

REVISIONS

No. Description Date

DRAWING TITLE
FINISH PLAN LEVEL 3

DRAWN BY: CHECKED BY:

PROJECT NUMBER 236002-02

DRAWING NO.

N
0' 4' 8' 12' 16'
3/16'=1'

A 1 FINISH PLAN - LEVEL 3
3/16" = 1'-0"

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and written consent of the Architect is prohibited.

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract

___ Documents.

ISSUED SET: 100% CONSTRUCTIO REVISIONS No. Description

FURNITURE PLAN -LEVEL 1

DRAWN BY: L.NICHOLS Author CHECKED BY:

PROJECT NUMBER 236002-02

 $\frac{\text{FURNITURE PLAN - LEVEL 1}}{3/16" = 1'-0"}$



BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125

www.kpsgroup.com This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing

written consent of the Architect is prohibited.

any of the Work in accordance with the Contract ___ Documents.

IBRARY


PROJECT STATUS ISSUED SET: 100% CONSTRUCTION SSUE DATE: REVISIONS No. Description

FURNITURE PLAN -LEVEL 3

DRAWN BY: L.NICHOLS Author CHECKED BY:

PROJECT NUMBER 236002-02



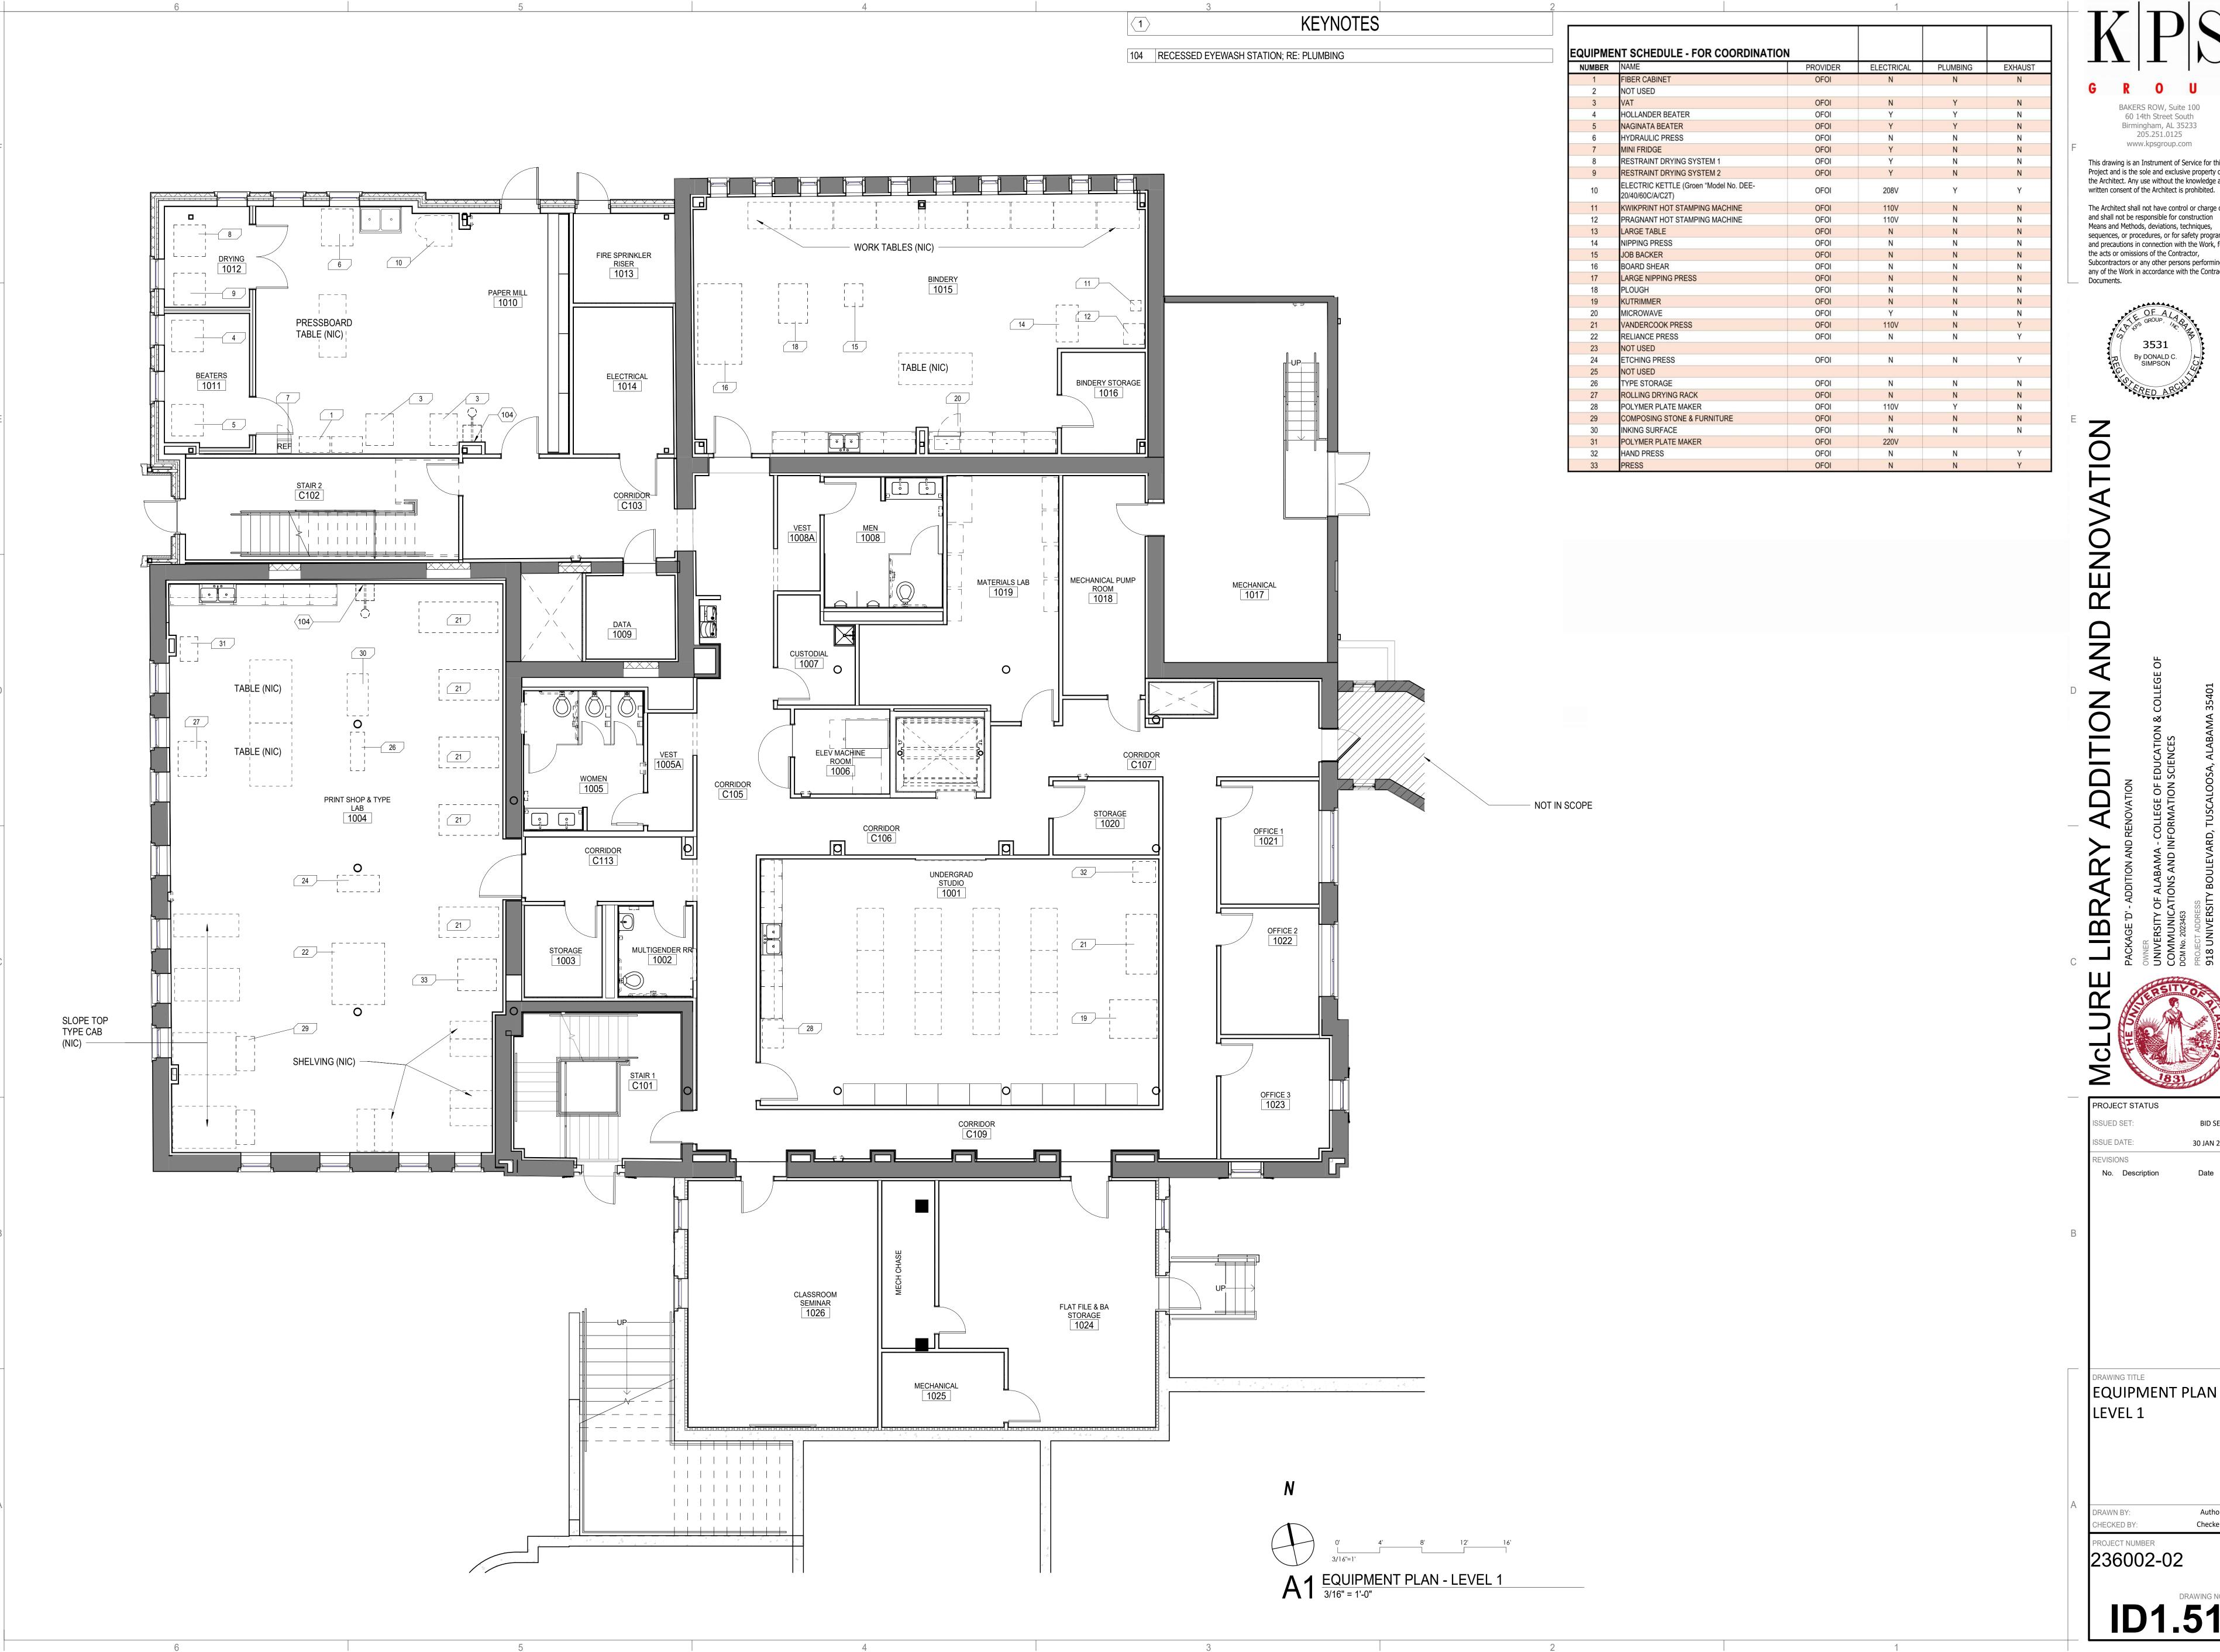

BAKERS ROW, Suite 100 60 14th Street South Birmingham, AL 35233 205.251.0125 www.kpsgroup.com

This drawing is an Instrument of Service for this Project and is the sole and exclusive property of the Architect. Any use without the knowledge and

The Architect shall not have control or charge of, and shall not be responsible for construction Means and Methods, deviations, techniques, sequences, or procedures, or for safety programs and precautions in connection with the Work, for the acts or omissions of the Contractor, Subcontractors or any other persons performing any of the Work in accordance with the Contract



EQUIPMENT PLAN -LEVEL 1

PROJECT NUMBER 236002-02

ID1.51