


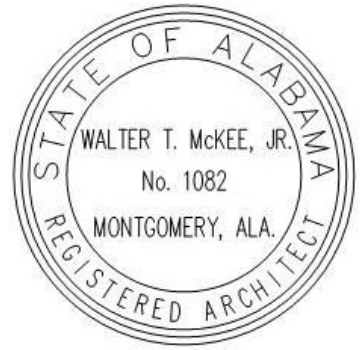

Addendum No. 4

Date: July 21, 2026

Project:

**Elevator for
Thompson High School for
Alabaster City Schools
Alabaster, Alabama**

LATHAN MCKEE PROJECT NO. 25-305A
ALABAMA DIVISION OF CONSTRUCTION MANAGEMENT NO. **2026395**

The following changes and/or substitutions to the plans and specifications are hereby made a part of same and are incorporated in full force as part of the contract.

Bidders shall acknowledge receipt of this Addendum in writing on his Proposal Form.

A4.1 GENERAL MODIFICATIONS:

N/A

A4.2 SPECIFICATION MODIFICATIONS:

N/A

A4.3 DRAWING MODIFICATIONS:


- A. See attached drawing **Sump Pump / Elevator Diagram for Traction Elevator** attached herein dated 7-21-26. The document includes the model for the pump, plumbing and electrical requirements with additional information for the installation for the sump pump system.

A4.4 CLARIFICATIONS and RESPONSES:

- A. As per the elevator specifications Section 14240-5 from Addendum 2, sprinklers are required in the hoistway to meet or exceed IBC/NFPA 13. The elevator manufacturer is responsible for verifying the sprinkler requirements during the shop drawing process. The sprinkler system is to be connected to the existing system and is the responsibility of the contractor to field verify the existing site conditions and adapt to the existing system as necessary for the sprinkler installation to meet or exceed the applicable code(s).

END OF ADDENDUM

- ① STANCOR MODEL SE-50 SUBMERSIBLE EFFLUENT PUMP, 50GPM
.5 HP, 115 VOLT, 3600 RPM, 2" DISCHARGE CONNECTION,
- ② HIGH LIQUID ALARM FLOAT WITH CLAMP DEVICE TO
MOUNT TO PUMP DISCHARGE PIPING
- ③ STANCOR SIMPLEX OIL MINDER 115V, 1Ø CONTROL SYSTEM WITH
OPTIONAL BUILT IN AUDIBLE AND VISUAL ALARM WHEN
PUMP DOES RUN DUE TO OIL IN PIT OR HIGH
LIQUID ALARM. PROVIDE SILENCING BUTTON FOR AUDIBLE
ALARM BUILT INTO PANEL. PANEL SHALL HAVE ADDITIONAL
CONTACT FOR A REMOTE ALARM LOCATION. OPTIONAL JUNCTION
BOX CAN BE PROVIDED WITH DIN RAIL MOUNTED TERMINALS FOR
FIELD HARD WIRING
- ⑤ ALL BURIED PUMP PRESSURE DISCHARGE PIPING
SHALL BE PROTECTED WITH TAPECOAT CT CORROSION
PROTECTION TAPE
- ⑥ POWER CABLE AND HIGH
LIQUID ALARM CABLE

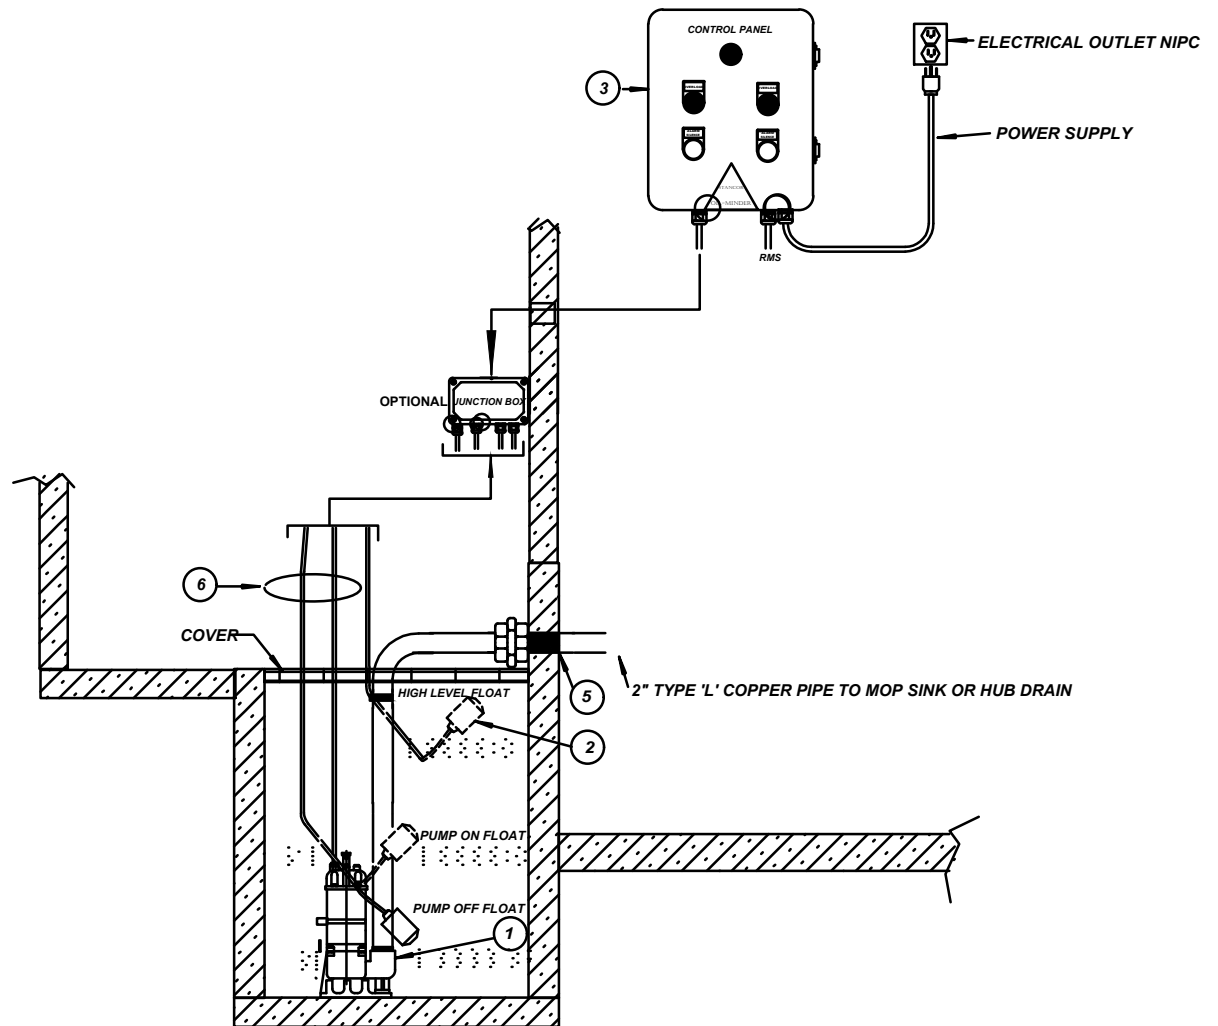

SUMP PUMP DIAGRAM - ELEVATOR DIAGRAM FOR TRACTION ELEVATOR